



Karndean
COMMERCIAL



PREMIUM LVT
STYLISH DESIGN.
EXCEPTIONAL DURABILITY.





CONTENTS

Introduction	6
Karndean Premium LVT	8
Karndean Evolve™	10
Commercial Sectors	14
Installation Formats and Collections	19
Installation Formats	20
Product Collections	22
Designs and Product Collections	25
Wood-Inspired Designs	26
Stone-Inspired Designs	32
Abstract-Inspired Designs	34
Art Select	36
Van Gogh	44
Opus	50
Knight Tile	60
Karndean LooseLay	68
Korlok Select	76
Korlok Reserve	84
Design Strips	90
Design Borders	94
Emblems and Logos	96
Solid Colors	98
Adhesives and Flooring Products	100
Resources and Support	103
Digital Tools	104
Customer Support	106
Samples	107
Product Index	109
Wood Designs by Collection Gluedown	110
Wood Designs by Collection Loose Lay	113
Wood Designs by Collection Rigid Core	114
Stone Designs by Collection Gluedown	117
Stone Designs by Collection Loose Lay	118
Stone Designs by Collection Rigid Core	118
Abstract Designs by Collection Gluedown	120

STYLISH DESIGN AND COMMERCIAL-GRADE PERFORMANCE.

Inspired by wood and stone from around the world, our premium LVT is available in hundreds of stylish designs and three installation formats – gluedown, rigid core and loose lay.

Guaranteed for up to 20 years in commercial settings, the combination of style, durability and performance makes our premium LVT a popular choice in a variety of key sectors, from healthcare, senior living and multi-family to education, hospitality and modular.

Proudly Family-Owned. Fifty Years and Counting.

We've been in the flooring business for over 50 years, but our commitment and craftsmanship has always been focused on a single product: beautifully designed luxury vinyl.

It was 1973 when our founder, Mike Walker, started a small business from his family home. A flooring installer, his goal was to make the products more widely accessible. It wasn't long before he recognized the immense potential of luxury vinyl, which would allow him to create beautifully designed flooring that was also durable and easy to maintain.

Mike traveled the world for inspiration, seeking to capture the beauty of nature by pioneering the strikingly realistic replication of wood and stone – a defining quality of our LVT designs to this day.



PREMIUM LVT

INSPIRED BY WOOD AND STONE FROM AROUND THE WORLD.

Our expertly crafted flooring designs bring the strikingly realistic look of wood and stone to commercial spaces – with all the durability and functional benefits of LVT. Waterproof, scratch-resistant and easy to clean, Karndean luxury vinyl combines unparalleled artistry and commercial-grade performance.



Stylish, realistic designs

Each and every one is original, meticulously crafted by our expert design team to capture the distinctive grains, textures and markings of hand-selected wood and stone.



Waterproof and easy to clean

Our LVT is impervious to water – it won't swell, warp or crack when wet. It's easy to clean, too, with a broom and mop or by machine.



Exceptional durability

Guaranteed for up to 20 years in commercial settings, our LVT features K-Guard+® surface protection for scratch- and scuff-resistance.



Quieter environments

Karndean LooseLay and rigid core products are designed with backing that reduces noise to lower floors while adding cushion for extra comfort.




Installation options

Our products are available in gluedown, loose lay and rigid core for installation, providing options based on your project needs.



Safe and hygienic

LVT does not promote bacterial growth or harbor dust, and the materials used in our flooring are tested for safety.

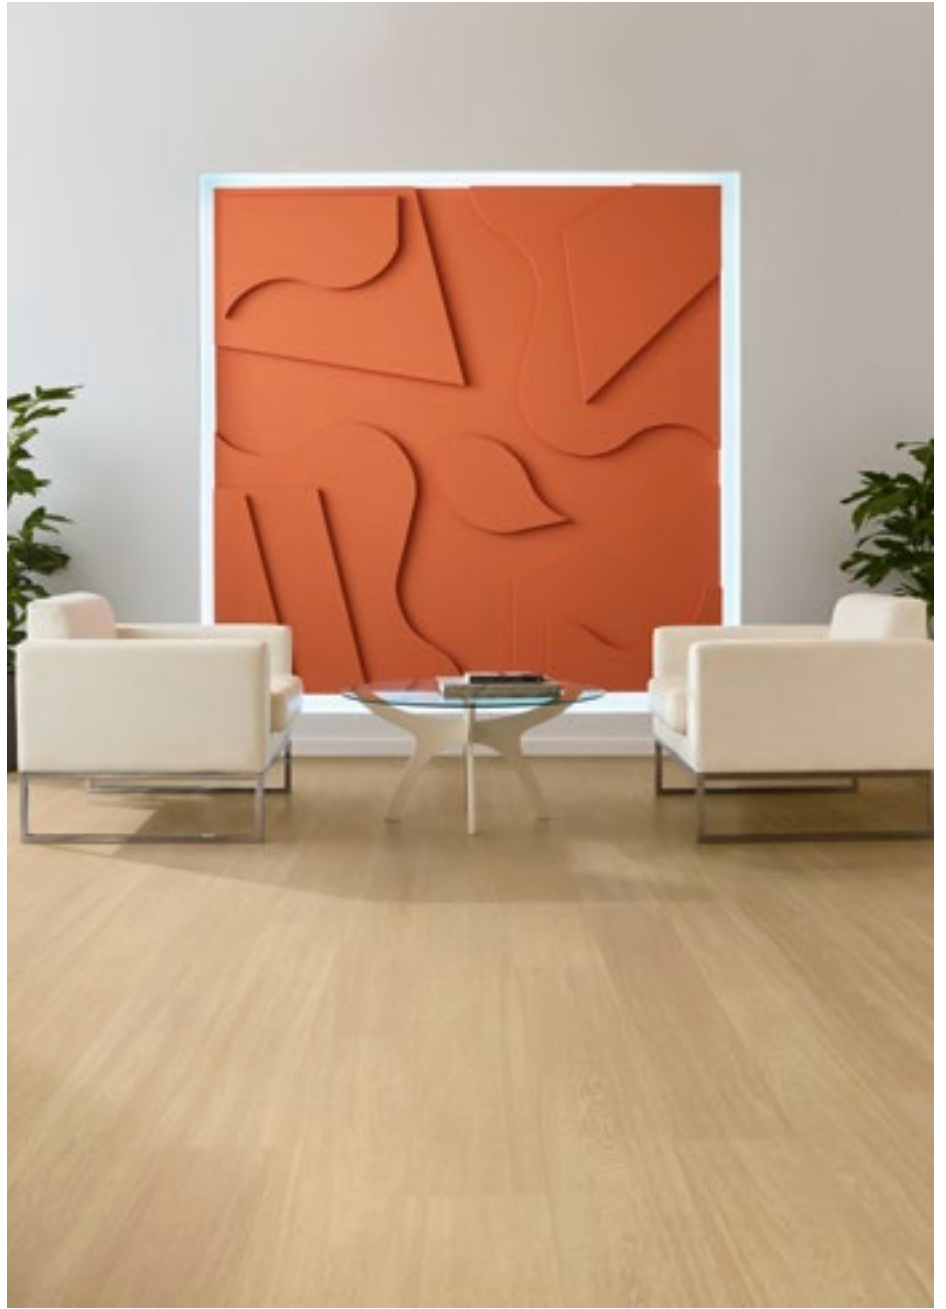

■ Natural Prime Oak **VGW115T | SCB115**

KARNDEAN EVOLVE™

THE PROMISE OF A BETTER TOMORROW.

It's a new day. And we're ready to create a better tomorrow.

Sustainable manufacturing. Complete supply chain transparency.
Closed-loop product life cycles. And an even stronger commitment
to fair and inclusive workplaces.

It's a continuing journey, and there are no shortcuts. But we know now's the
time for everyone to begin taking bigger steps. Ours is a promise to think
differently, act decisively, and create real change.

It's a promise to Evolve.



THE FUTURE
DEMANDS CHANGE.
IT'S TIME TO CREATE
A BETTER TOMORROW.

01

CONFRONTING CLIMATE CHANGE

Reducing our carbon footprint through energy efficiency and use of renewable energy.

Science-based targets

We have established science-based targets for greenhouse gas reduction: at least 50% by 2030.

Renewable energy and energy efficiency

All manufacturing facilities have installed or are investing in renewable energy generation and energy-efficient technology:

- Solar panels
- Locally sourced biomass for heating
- Closed-loop water system on production line

02

INDIVIDUAL HEALTH AND WELL-BEING

Ensuring the health and safety of those involved with manufacturing and use of our products.

Safe products

- Free from heavy metals and unsafe phthalates
- FloorScore® certified for post-installation indoor air quality
- Rated A+ for volatile organic compounds
- Water-based or solvent-free adhesives with very low VOC emissions

Safe working conditions

We commission independent factory audits for:

- Working conditions
- Hours worked
- Workplace health and safety



SMART DURABLE RESPONSIBLE

CERTIFIED BY SCS Global Services



CERTIFIED BY SCS Global Services



03

SUSTAINABLE RESOURCE USE

Conserving natural resources and using post-industrial recycled materials.

Recycled material

All products use as much as 50% recycled PVC in the backing layers, with material derived from post-production waste such as offcuts.

04

INCLUSION AND DIVERSITY

Nurturing an equitable, inclusive and diverse workplace culture through engagement and education.

05

SUPPLY CHAIN TRANSPARENCY

Including third-party certifications for environmental and social responsibility.

ISO 14001

All factories that manufacture our products are certified to the ISO 14001 environmental standard, which provides a framework for measuring and reducing environmental impact.

Safe working conditions

We commission independent factory audits for:

- Working conditions
- Hours worked
- Workplace health and safety

Environmental Product Declarations

We have environmental product declarations for all of our products – independently verified reports based on life cycle assessments of environmental impact.

06

EDUCATION

Educating employees about the importance of sustainability, helping them understand what role they play and increasing the likelihood of achieving our goals.



■ River Marble **ST31 | SCB-ST31-G**

COMMERCIAL SECTORS

HIGH DURABILITY. LOW MAINTENANCE.



Hospitality | ■ Shadow Oak **RKP8203**

Hospitality

Bars, restaurants, hotels, resorts, event spaces – most have a distinct brand identity, with thoughtfully designed spaces to match. Our LVT is available in hundreds of stylish looks and colors, providing the right flooring for any interior design approach.

Just as importantly, LVT offers the durability and performance – with wear layers up to 30 mil – needed for high-traffic public spaces. The flooring is easy to clean and maintain, and our gluedown and loose lay products allow you to lift and replace damaged planks or tiles. For renovation projects, Karndean LooseLay and rigid core products offer fast, easy installation, minimizing disruption and downtime. The loose lay and rigid core products also reduce noise to lower floors in multi-story environments like hotels and resorts – from 16 dB to 22 dB.

Our premium LVT delivers durability and performance for heavily trafficked environments.

Healthcare

Healthcare environments can range from large, multi-story hospitals to private practices, dental offices and veterinary clinics. We have product collections with 20 mil and 30 mil wear layers, and LVT is easy to clean and maintain – without the need for harsh chemicals or periodic waxing. Our gluedown and loose lay installation formats can be used to create zoning and wayfinding, and Karndean LooseLay is 4.5 mm thick, transitioning easily to most carpet tile.

Aesthetically, our flooring is available in countless stylish looks and colors, allowing it to be used in thoughtfully designed spaces that are pleasant, warm and welcoming.



Healthcare | ■ Fumo **SP216** | Burnt Sienna **SP719** | Indigo **SP720** | Amber **SP721**

Modular

Modular construction continues to emerge as a growing sector, in many cases offering a cost-efficient solution for single- and multi-family housing. Our premium LVT is available in two “floating floor” installation formats, rigid core and loose lay, that can be laid quickly and easily, without the need for adhesive. Both types of flooring are engineered with a layer that provides cushion for extra comfort, too.

There’s no reason to compromise on style, either. With wood- and stone-inspired looks in a broad spectrum of colors, our LVT can be integrated with any interior design approach.



Modular | ■ Sterling Oak LLP354

Please note: Product performance may vary. Consult each collection’s product technical data sheets for information about static loads, slip-resistance, environmental certifications and more.

COMMERCIAL SECTORS

HIGH DURABILITY. LOW MAINTENANCE.

Education

Our LVT is durable, hygienic, and easy to clean and maintain – all key attributes for the education sector, from classrooms, auditoriums and hallways to pre-K spaces. Our rigid core and Karndean LooseLay products can be installed quickly and easily in larger spaces, while our gluedown and Karndean LooseLay products can be cut and installed in custom patterns that help bring a space to life. In multi-story buildings like dormitories, the rigid core and Karndean LooseLay products contribute to quieter environments, reducing noise to lower floors from 16 dB to 22 dB.



Education | ■ Shorebird Ash **LLP360**



Multi-family | ■ Cumbrian Stone **ST14** with DS10 3mm design strip

Multi-family

These environments require flooring that feels like home for residents while being low-maintenance for management and staff. Our rigid core and Karndean LooseLay LVT contributes to quieter environments in multi-story buildings, reducing noise to lower floors from 16 dB to 22 dB, while all of our LVT is easy to clean and maintain – no harsh chemicals, waxing or noisy machinery required.

Durability is obviously key, too. Available with 20 mil and 30 mil wear layers, our flooring features K-Guard+® surface protection against everyday wear, spills and scuffs. Gluedown and Karndean LooseLay planks and tiles offer the added benefit of being individually replaceable if damaged.

Please note: Product performance may vary. Consult each collection's product technical data sheets for information about static loads, slip-resistance, environmental certifications and more.

Senior Living

Our premium LVT delivers it all for senior living environments – from tasteful, timeless looks that feel like home, to gluedown and loose lay flooring that can be installed without expansion gaps or transition strips.

For durability, we have product collections with 20 mil and 30 mil wear layers, and all of our flooring features K-Guard+® surface protection against everyday wear, spills and scuffs. LVT does not harbor dirt or dust, and it's easy to clean and maintain – without the need for harsh chemicals, periodic waxing or noisy, disruptive machinery.



Senior Living | ■ Basque Oak **RL26** | Serrano Oak **RL28**

installation formats and collections


Our premium LVT is available in three installation formats across seven product collections, with each collection offering different specs – from wear layer and product thickness to plank and tile sizes.

Together, it all adds up to a range of options based on what's best for your project.

INSTALLATION FORMATS

Gluedown


Affixed to the subfloor with adhesive, gluedown flooring provides limitless design possibilities. Planks and tiles can be cut and laid in patterns, complemented by design strips and decorative borders – all allowing you to create stylish custom looks or zoning that sets an area apart.

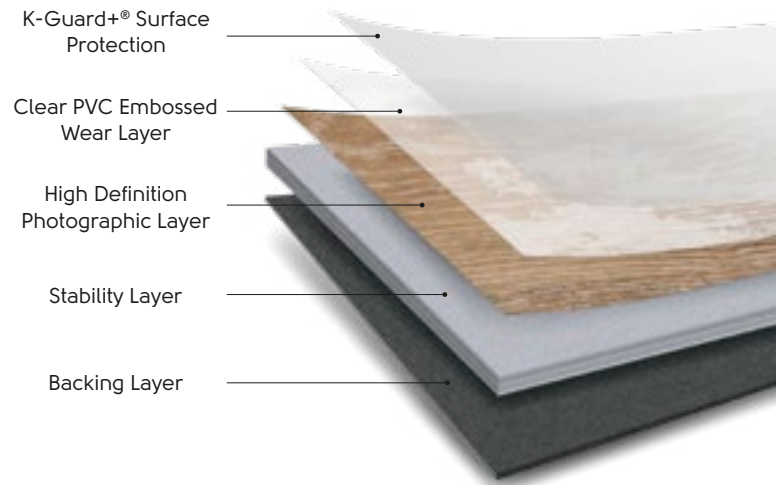

Loose lay

Our loose lay flooring combines the best features of gluedown and rigid core installation formats. Pieces can be cut and laid in custom patterns, like gluedown, while still offering the fast, easy installation of a non-adhesive floating floor.


It's all possible because of our K-Wave® friction-grip backing, which holds the floor in place and eliminates the need for full-spread adhesive. Karndean LooseLay also includes SureFit™ technology for increased dimensional stability, so no expansion gaps or transition strips are needed.

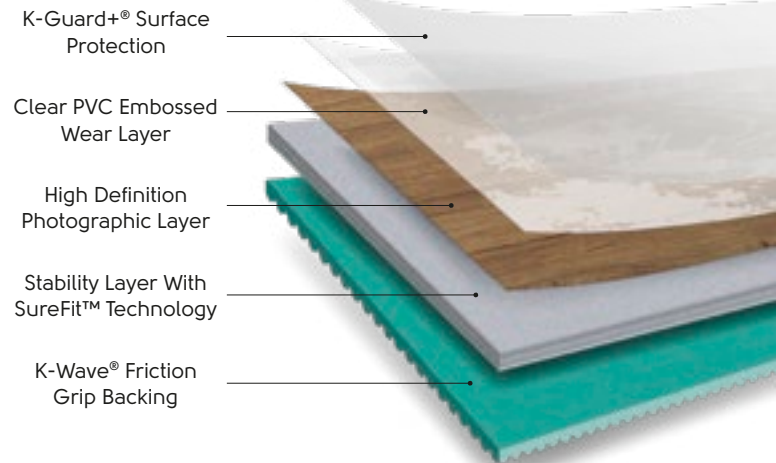

Rigid core

Rigid core is an easy-to-install “floating floor” – the pieces easily click and lock together, and adhesive is not required.

Our rigid core flooring includes K-Core® technology that ensures a stable core for installation over most hard floors without revealing subfloor imperfections.

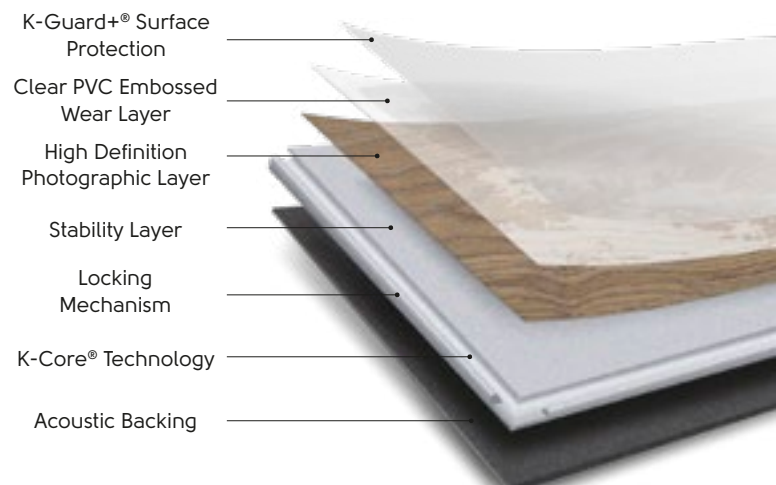

Gluedown benefits



Individually replaceable if damaged



No expansion gaps or transition strips needed



Can be cut and laid in custom patterns



Widest selection of wood- and stone-inspired designs



Create custom looks with design strips and decorative borders

Loose lay benefits



Fast, easy installation



Reduces noise to lower floors by 16 dB while adding cushion for comfort



No expansion gaps or transition strips needed



Individually replaceable if damaged



Can be cut and laid in custom patterns



Moisture dissipation for damp subfloors – suitable for subfloors up to 95% RH

Rigid core benefits



Fast, easy installation



Conceals subfloor imperfections



Can be installed over most hard floors



Backing reduces noise to lower floors by up to 22 dB

PRODUCT COLLECTIONS

Collection	Beveled Edge	Plank Size (inches)	Tile Size (inches)	Thickness (mm)
Gluedown				
Art Select	Standard	28.0" x 4.5" 36.0" x 6.0" 48.0" x 4.5" 48.0" x 7.0" 56.0" x 9.0"	18" x 24.0" 17.99" x 23.62" 18.0" x 36.0"	3.0
Van Gogh	Micro	48.0" x 7.0"	N/A	3.0
Opus	Micro	36.0" x 6.0" 36.0" x 4.0" 48.0" x 9.0"	3.0" x 18.0" 6.0" x 36.0" 9.0" x 9.0" 12.0" x 12.0" 18.0" x 24.0" 18.0" x 36.0" 18.0" x 18.0"	2.5
Knight Tile	No	36.0" x 6.0" 48.0" x 9.0"	12.0" x 18.0"	2.0
Loose lay				
Karndean LooseLay	No	59.06" x 9.84" 41.34" x 9.84"	19.69" x 24.02"	4.5
Rigid core				
Art Select	Standard	28.0" x 4.25" 36.0" x 5.91" 48.0" x 4.25" 48.03" x 7.05" 55.91" x 8.86"	18.0" x 18.0" 17.99" x 23.62" 18.0" x 36.0"	7.0
Van Gogh	Micro	48.03" x 7.09"	N/A	4.5
Knight Tile	No	36.0" x 5.91" 48.03" x 8.86"	12.0" x 18.0"	4.5
Korlok Select	Micro	55.91" x 8.86" 23.46" x 5.87"	17.99" x 23.62" 5.87" x 23.46"	6.5
Korlok Reserve	Micro	48.03" x 7.05"	N/A	6.5

^ Subject to terms. Please see our website.

** Lifetime warranty defined as 35 years.

± Subject to terms. Light commercial use only.

*** Nominal.

Wear Layer mil (mm)	Residential Warranty ^{^*}	Commercial Warranty [^]	Light Industrial Warranty [^]
30 ^{***} (0.7)	Lifetime ^{**}	20 years	20 years
20 (0.5)	Lifetime ^{**}	15 years	15 years
20 (0.5)	Lifetime ^{**}	15 years	15 years
12 (0.3)	Lifetime ^{**}	10 years [†]	–
20 (0.5)	Lifetime ^{**}	15 years	15 years
30 (0.7)	Lifetime ^{**}	20 years	20 years
20 (0.5)	Lifetime ^{**}	15 years	–
12 (0.3)	Lifetime ^{**}	10 years	–
20 (0.5)	Lifetime ^{**}	15 years	–
20 (0.5)	Lifetime ^{**}	15 years	–

designs and product collections

The woods and stones that inspire our designs are sourced from around the world – forests and lumberyards to remote mountain quarries. In the skilled hands of our design team, the natural characteristics of the source materials are replicated and enhanced in exacting detail.

Light or dark. Cool, warm or neutral. Choose from designs in hundreds of colorways, all capturing the distinctive grains, textures and markings of the wood and stone that inspired them.

Every design is a Karndean original, each with a story that's just as unique.

Wood-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay




■ KPI05
■ SCB-KPI05-6



■ RKP8217



■ KPI33
■ SCB-KPI33-6



■ RL38
■ AKP-RL38



■ VGW137T
■ SCB137



■ RL45
■ AKP-RL45




■ WP331




■ LLP95




■ KPI54
■ SCB-KPI54-6




■ LLP306




■ LLP149



■ RL32
■ AKP-RL32




■ SM-RKP8105




■ RKP8105




■ LLP352



■ RCP6546



■ LLP355




■ KPI38
■ SCB-KPI38-6



■ RL35
■ AKP-RL35




■ LLP157




■ VGW139T
■ SCB139




■ RL26
■ AKP-RL26



■ SM-RL26
■ AKP-SM-RL26



■ RKP8236




■ RL43
■ AKP-RL43




■ LLP353




■ RL21
■ AKP-RL21




■ SM-RL21-18
■ AKP-SM-RL21-28




■ RCP6544




■ RKP8101



■ LLP330




■ WP311




■ RCP6532




■ RKP8108



■ SM-RKP8116




■ RKP8116

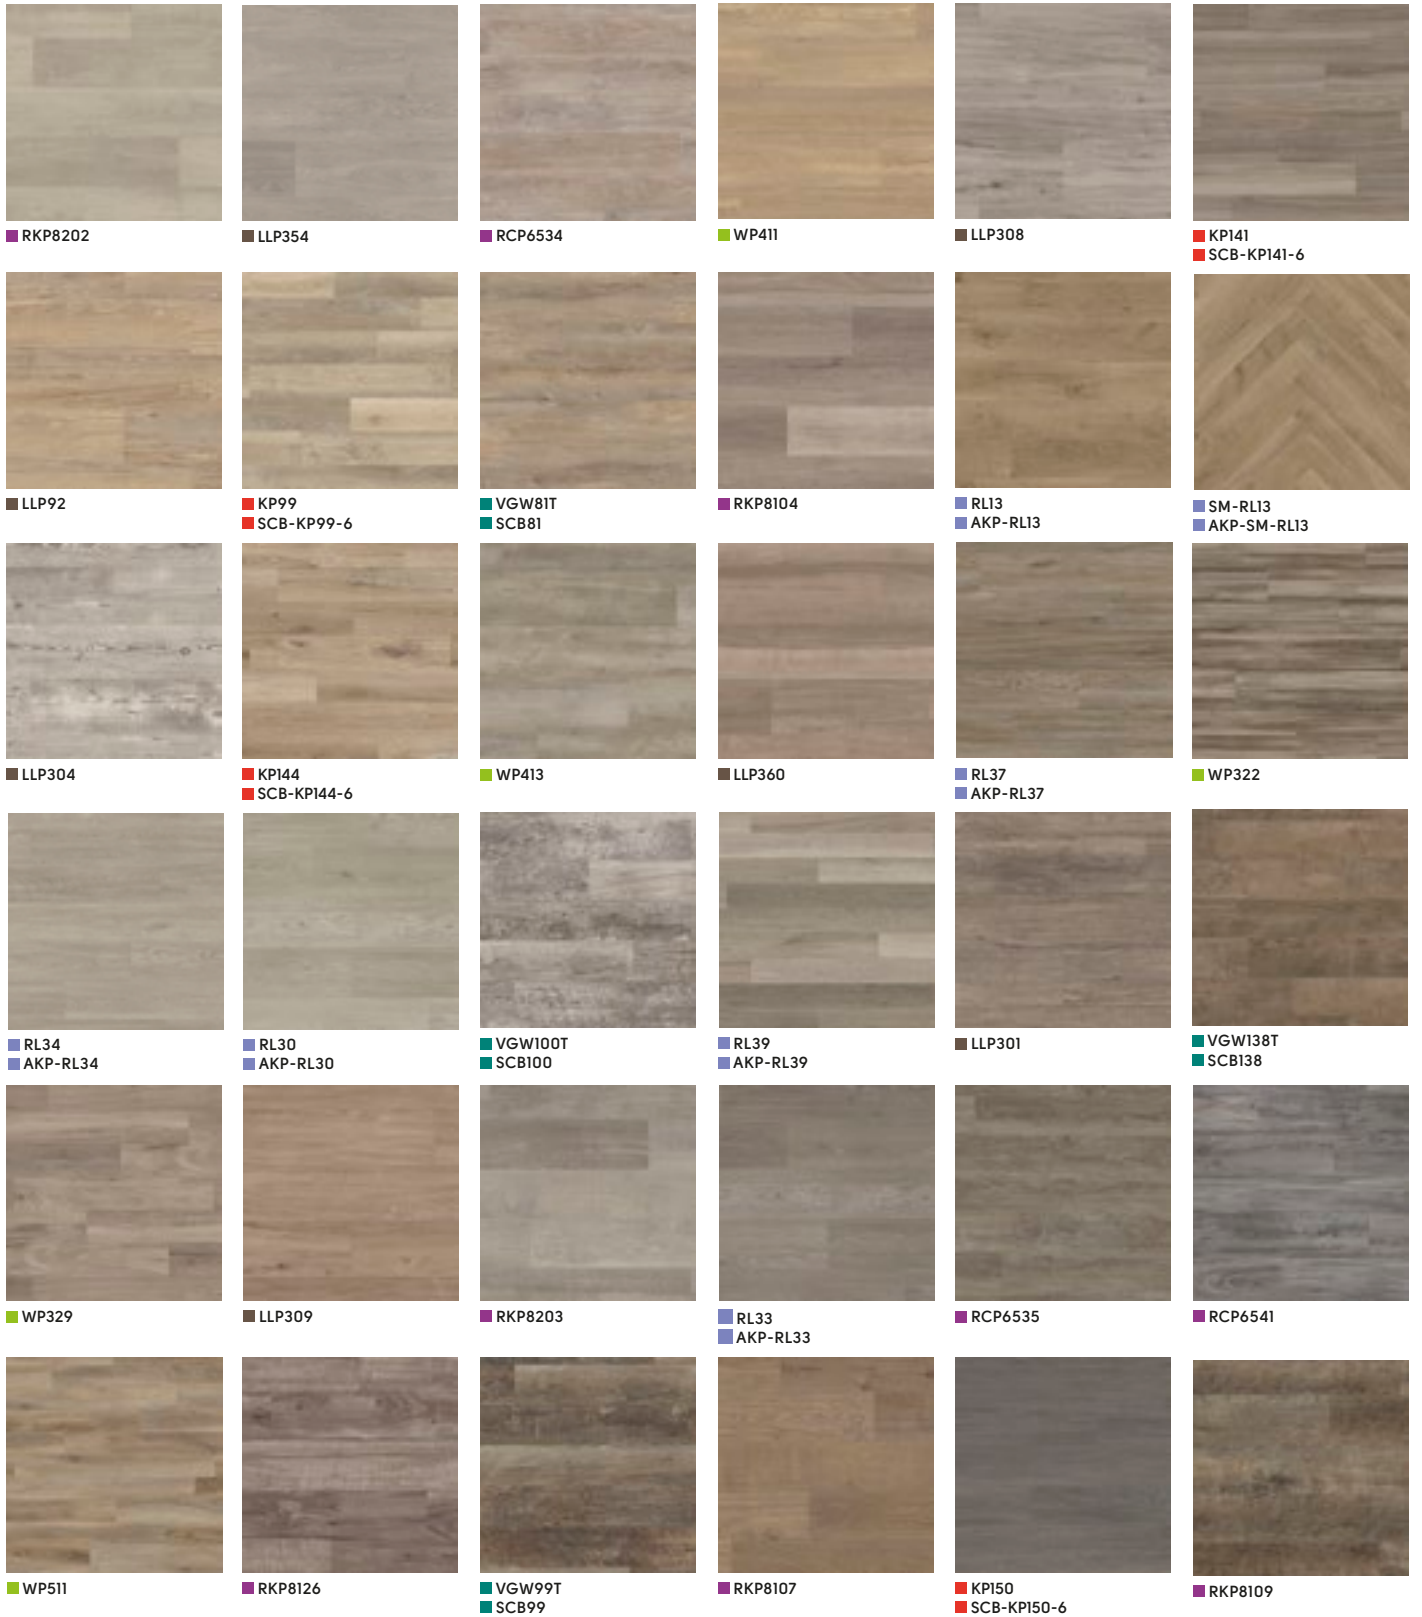


Wood-Inspired Designs

Product Collections:


■ Kortok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay




■ WP328



■ VGW143T
■ SCB143



■ EW02
■ AKP-EW02



■ RKP8114




■ RL28
■ AKP-RL28




■ SM-RL28
■ AKP-SM-RL28




■ LLP112




■ RL03
■ AKP-RL03




■ WP316




■ WP415




■ RKP8102




■ RKP8124



■ RCP6539



■ RKP8110



■ LLP303




■ WP330




■ EW03
■ AKP-EW03



■ EW01
■ AKP-EW01




■ VGW91T
■ SCB91



■ WP326




■ VGW41T
■ SCB41




■ WP325




■ RL07
■ AKP-RL07




■ RL44
■ AKP-RL44




■ KP98
■ SCB-KP98-6



■ VGW89T
■ SCB89




■ RKP8122



■ RL50
■ AKP-RL50




■ RL36
■ AKP-RL36




■ KP97
■ SCB-KP97-6




■ WP318




■ RKP8209




■ SM-RKP8209




■ LLP111



■ RKP8238




■ LLP361

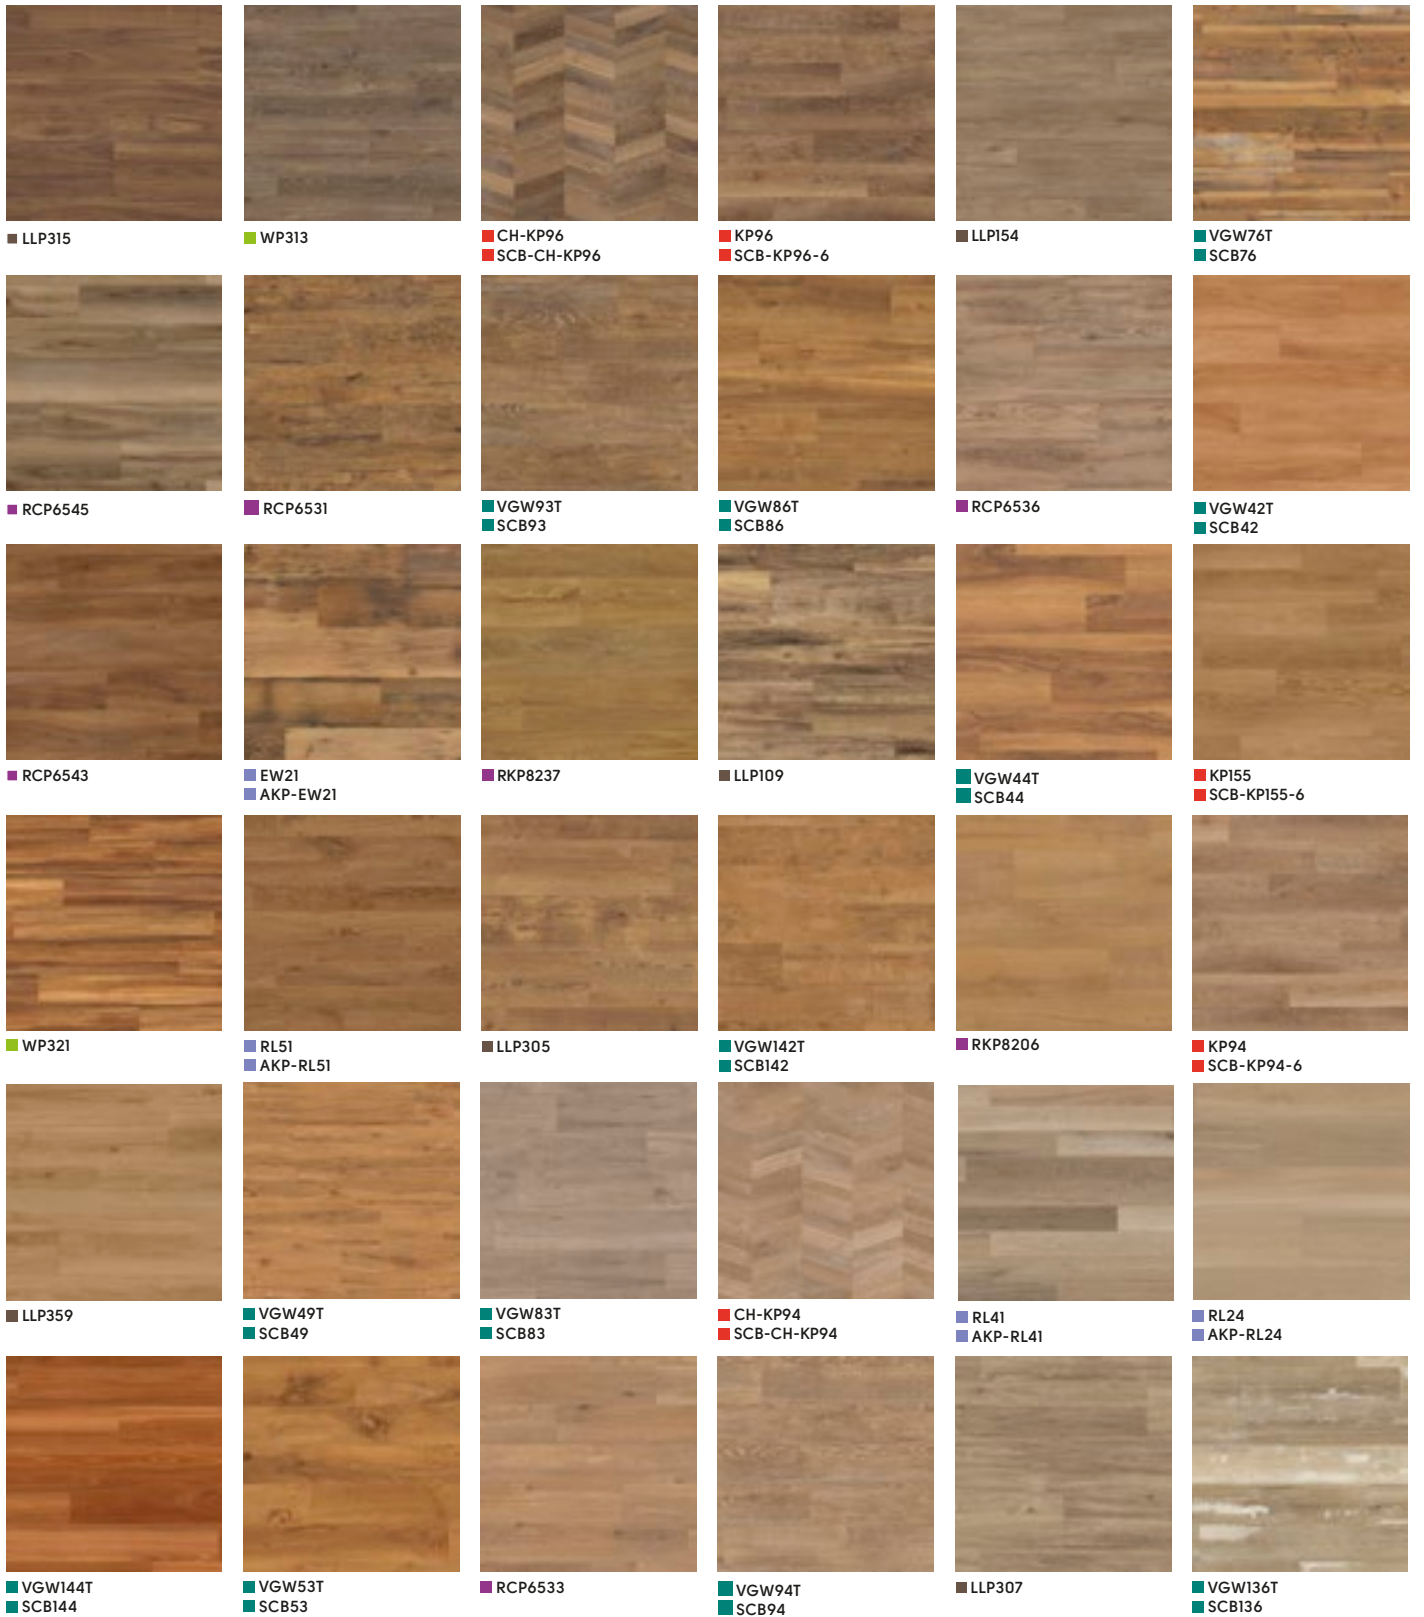


Wood-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay



■ LLP39




■ VGW39T
■ SCB39




■ EW13
■ AKP-EW13




■ LLP94




■ LLP356




■ RKP8111



■ KP145
■ SCB-KP145-6




■ VGW85T
■ SCB85




■ RKP8103




■ LLP357



■ LLP317



■ RL01
■ AKP-RL01




■ LLP113




■ RKP8215



■ RL49
■ AKP-RL49



■ LLP310



■ RL48
■ AKP-RL48



■ VGW115T
■ SCB115



■ LLP358



■ Pale Limed Oak CH-KP94 | SCB-CH-KP94

Stone-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay




■ RKT3013-G




■ SM-RKT3013-G



■ LM32
■ AKT-LM32




■ LM33
■ AKT-LM33



■ LM35
■ AKT-LM35



■ LM38
■ AKT-LM38




■ RKT3012-G



■ SM-RKT3012-G



■ ST31
■ SCB-ST31-G



■ ST17
■ SCB-ST17-G



■ LM50
■ AKT-LM50



■ SP212




■ ST18
■ SCB-ST18-G



■ RKT2408



■ LM36
■ AKT-LM36



■ LM37
■ AKT-LM37




■ RKT3005-G



■ LLT214



■ LM40
■ AKT-LM40



■ LM44
■ AKT-LM44



■ LM43
■ AKT-LM43




■ LM30
■ AKT-LM30



■ LLT218



■ RKT2407



■ LM42
■ AKT-LM42



■ LM39
■ AKT-LM39



■ LLT201



■ RKT3011-G



■ ST24
■ SCB-ST24-G



■ ST13
■ SCB-ST13-G



■ LM51
■ AKT-LM51




■ LM45
■ AKT-LM45




■ RKT3007-G



■ ST16
■ SCB-ST16-G



■ SP213



■ RKT3010-G



■ LLT209



■ STI2
■ SCB-STI2-G



■ RKT3009-G



■ RKT3004-G



■ LLT202



■ ST5-18
■ SCB-ST5-G




■ LLT217



■ LLT212



■ SP216




■ SM-SP216



■ RKT3001-G




■ RKT3008-G



■ RKT3003-G



■ LLT200




■ RKT3002-G




■ ST30
■ SCB-ST30-G



■ SP714




■ LLT206




■ RKT3006-G




■ LLT211




■ SP115




■ STI4
■ SCB-STI4-G



■ SP215



■ LM49
■ AKT-LM49



■ SP218



■ LM31
■ AKT-LM31


Abstract-Inspired Designs

Product Collection:

■ Opus




■ SP731



■ SP116




■ SP220



■ SP733




■ SP734



■ SP118



■ SP729



■ SP117



■ SP724
■ SP725



■ SP721



■ SP219



■ SP722
■ SP723



■ SP726



■ SP719




■ MAYF-02




■ SP730



■ SP735



■ SP720



■ MAYF-01



■ CLIF-04



■ CLIF-01



■ SP732



■ SP727
■ SP728



■ Salute Grigio **SP118** | Burnt Sienna **SP719** | Indigo **SP720**

Art Select

Our Art Select collection sets the standard for premium LVT. Elevating LVT design to an artform, we combine cutting-edge technology and hands-on craftsmanship to replicate wood and stone in striking detail. The Art Select collection includes more than 45 wood- and stone-inspired designs in a broad spectrum of tones – all with a top-of-the-line 30 mil wear layer, and all available in gluedown and rigid core for installation.

Sophisticated design to commercial-grade durability, Art Select offers unparalleled style and performance.



■ Lago Quartzite LM49 | AKT-LM49

Gluedown		Rigid Core	
36.0" x 6.0" 56.0" x 9.0" 48.0" x 7.0" 48.0" x 4.50" 28.0" x 4.50"	Plank Size	36.0" x 5.91" 55.91" x 8.86" 48.03" x 7.05" 48.0" x 4.25" 28.0" x 4.25"	
18.0" x 18.0" 18.0" x 36.0" 18.0" x 24.0"	Tile Size	18.0" x 18.0" 18.0" x 36.0" 17.99" x 23.62"	
30mil	Wear Layer	30mil	
3mm	Thickness	7mm	
Lifetime	Residential Warranty	Lifetime	
15 years	Commercial Warranty	15 years	
Begins with EW RL SM-RL LM	Product Code	Begins with AKP- AKT-	



Reclaimed Chestnut EW21 | AKP-EW21



5G® Locking Mechanism

Art Select rigid core can be installed with confidence. The 5G® locking mechanism securely locks pieces at the end seams with a single click. It's technology that's backed by our HoldFast™ warranty.

Art Select Wood Designs

Gluedown: 28.0" x 4.50" (711.2mm x 114.3mm) | Rigid Core*: 28.0" x 4.25" (711.2mm x 107.95mm)



Basque Oak: Gluedown **SM-RL26** |
Rigid Core **AKP-SM-RL26**



Glacier Oak: Gluedown **SM-RL21-28** |
Rigid Core **AKP-SM-RL21-28**



Salon Oak: Gluedown **SM-RL13** |
Rigid Core **AKP-SM-RL13**



Serrano Oak: Gluedown **SM-RL28** |
Rigid Core **AKP-SM-RL28**

Gluedown: 36.0" x 6.0" (914.4mm x 152.4mm) | Rigid Core: 36.0" x 5.91" (914.4mm x 150.0mm)



Hickory Paprika:
Gluedown **EW01** | Rigid Core **AKP-EW01**



Hickory Nutmeg:
Gluedown **EW03** | Rigid Core **AKP-EW03**



Hickory Peppercorn:
Gluedown **EW02** | Rigid Core **AKP-EW02**

Gluedown: 48.0" x 4.50" (1219.2mm x 114.3mm) | Rigid Core: 48.0" x 4.25" (1219.2mm x 107.95mm)



Canadian Maple: Gluedown **RL49** | Rigid Core **AKP-RL49**



Canterbury Ash: Gluedown **RL41** | Rigid Core **AKP-RL41**



Natural Oak: Gluedown **RL48** | Rigid Core **AKP-RL48**



Lorenzo Warm Oak: Gluedown **RL51** | Rigid Core **AKP-RL51**



Blended Oak: Gluedown **RL50** | Rigid Core **AKP-RL50**



Golden Kent Ash: Gluedown **RL44** | Rigid Core **AKP-RL44**



Belmont Hickory: Gluedown **RL45** | Rigid Core **AKP-RL45**



Fieldstone Ash: Gluedown **RL43** | Rigid Core **AKP-RL43**




Castle Hill Ash: Gluedown **RL39** | Rigid Core **AKP-RL39**



Available in gluedown and rigid core installation formats.

*These skus can only be laid in a herringbone pattern.

Gluedown: 48.0" x 7.0" (1219.2mm x 177.8mm) | Rigid Core: 48.03" x 7.05" (1220.0mm x 179.0mm)



Spring Oak: Gluedown **RL01** | Rigid Core **AKP-RL01**



Cotton Oak: Gluedown **RL38** | Rigid Core **AKP-RL38**



Merino Oak: Gluedown **RL36** | Rigid Core **AKP-RL36**



Damask Oak: Gluedown **RL35** | Rigid Core **AKP-RL35**



Autumn Oak: Gluedown **RL03** | Rigid Core **AKP-RL03**



Canvas Oak: Gluedown **RL34** | Rigid Core **AKP-RL34**



Santina Cherry: Gluedown **RL07** | Rigid Core **AKP-RL07**



Salon Oak: Gluedown **RL13** | Rigid Core **AKP-RL13**



Tweed Oak: Gluedown **RL37** | Rigid Core **AKP-RL37**

Gluedown: 56.0" x 9.0" (1422.4mm x 228.6mm) | Rigid Core: 55.91" x 8.86" (1420.0mm x 225.0mm)



Classic Hickory: Gluedown **EW13** | Rigid Core **AKP-EW13**



Pale Artisan Oak: Gluedown **RL32** | Rigid Core **AKP-RL32**



Dune Oak: Gluedown **RL24** | Rigid Core **AKP-RL24**



Basque Oak: Gluedown **RL26** | Rigid Core **AKP-RL26**



Reclaimed Chestnut: Gluedown **EW21** | Rigid Core **AKP-EW21**



Glacier Oak: Gluedown **RL21*** | Rigid Core **AKP-RL21***



Serrano Oak: Gluedown **RL28** | Rigid Core **AKP-RL28**



Dove Artisan Oak: Gluedown **RL30** | Rigid Core **AKP-RL30**



Grey Artisan Oak: Gluedown **RL33** | Rigid Core **AKP-RL33**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Art Select Stone Designs

Gluedown: 18.0" x 24.0" (457.2mm x 609.6mm) | Rigid Core: 17.99" x 23.62" (457.0mm x 600.0mm)



Alpine Quartzite:
Gluedown **LM50** | Rigid Core **AKT-LM50**



Sterling Quartzite:
Gluedown **LM51** | Rigid Core **AKT-LM51**



Lago Quartzite:
Gluedown **LM49** | Rigid Core **AKT-LM49**


Gluedown: 18.0" x 18.0" (457.2mm x 457.2mm) | Rigid Core: 18.0" x 18.0" (457.2mm x 457.2mm)



Doric Marble:
Gluedown **LM32** |
Rigid Core **AKT-LM32**



Ionic Marble:
Gluedown **LM30** |
Rigid Core **AKT-LM30**



Corinthian Marble:
Gluedown **LM31** |
Rigid Core **AKT-LM31**



Available in gluedown and rigid core installation formats.

Gluedown: 18.0" x 36.0" (457.2mm x 914.4mm) | Rigid Core 18" x 36" (457.2mm x 914.4mm)




Pearl Onyx: Gluedown **LM35** | Rigid Core **AKT-LM35**



Caliza Classico: Gluedown **LM39** | Rigid Core **AKT-LM39**



Calacatta d'Oro: Gluedown **LM33** | Rigid Core **AKT-LM33**

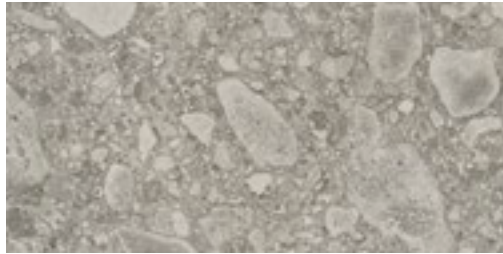

Naturale Ceppo: Gluedown **LM45** | Rigid Core **AKT-LM45**



Brezza Ceppo: Gluedown **LM43** | Rigid Core **AKT-LM43**



Champagne Travertino: Gluedown **LM38** | Rigid Core **AKT-LM38**




Silk Travertino: Gluedown **LM37** | Rigid Core **AKT-LM37**




Rose Onyx: Gluedown **LM36** | Rigid Core **AKT-LM36**



Pavimento Crema: Gluedown **LM40** | Rigid Core **AKT-LM40**

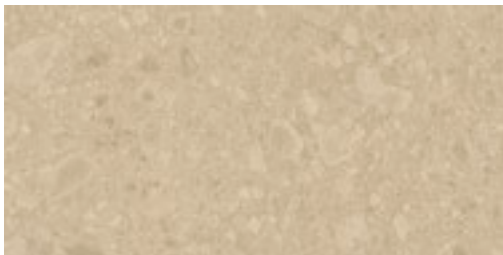

Sabbia Ceppo: Gluedown **LM44** | Rigid Core **AKT-LM44**

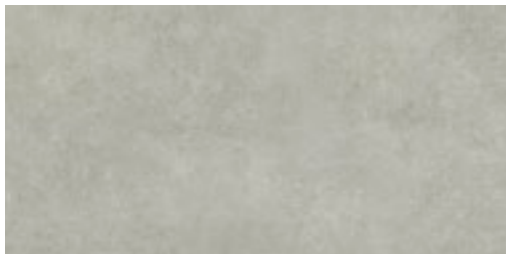

Pavimento Bianco: Gluedown **LM42** | Rigid Core **AKT-LM42**


Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Art Select



■ Pearl Onyx LM35 | Rose Onyx LM36 | Dove Artisan Oak RL30

	Standard	Gluedown	Rigid Core
Size	ASTM F2421	See Index N/A	N/A See Index
Locking system¹		N/A	5G® Fold Down installation system ² 
Thickness	ASTM F386 ASTM F387	3.0 mm N/A	N/A 7.0 mm
Wear layer	ASTM F410	30 mil ³ (0.7 mm) N/A	N/A 30 mil ³ (0.7 mm)
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Warranty⁴	Commercial Residential	20 years Lifetime	20 years Lifetime
Beveled edge		Standard	Standard
Classification		ASTM 1700: Class III Type B	ASTM F3261: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class I	Class I
Smoke density	ASTM E662-06	Pass (<450)	N/A
Flammability test	ASTM D2859	Pass	Pass
Slip resistance⁵	ASTM D2047	Pass (Dry 0.80)	Pass (Dry > 0.8)
Staining resistance	ASTM F925	Pass	Pass
Heat fastness	ASTM F1514	Pass	Pass
Light fastness	ASTM F1515	Pass	Pass
Electrostatic propensity	AATCC 134-1996	1.2 kv	1.7 kv
Abrasion resistance	ASTM D4060	Pass (>50,000 Cycles)	Pass (>50,000 Cycles)
Dimensional stability	ASTM F2199	Pass	Pass
Acoustic impact noise reduction	ASTM E2179 ASTM E492	ΔIIC = 9 dB IIC = 46 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	ΔIIC = 25 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static load	ASTM F970	Pass (1800 psi at 0.005")	Pass (400 psi at 0.005")
Indentation - residual	ASTM F1914	Pass	Pass
Thickness swell	NALFA 3.2	N/A	Pass (Class 4)
Flexibility	ASTM F137	Pass	N/A
Adhesive		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our installation instructions.
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ISO 14001 / ISO 9001 ASSURE CERTIFIED™	Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Conformant product Manufactured to quality and environment management systems standards N/A	Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
Recycling		Suitable	Suitable
Phthalate free	CPSC-C1001-09.3	Yes	Yes

1 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 5G® along short edge; 2G™ long edge

3 Nominal.

4 Subject to terms. Please see our website.

5 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Van Gogh

Our Van Gogh collection is inspired by wood from around the world, lovingly crafted to capture the distinctive textures and grain details that makes the wood unique – with none of the maintenance required for hardwood flooring, and all of the performance of luxury vinyl. From painted oak floorboards found in a Holland farmhouse to cedar planks salvaged from a private school in San Diego, every design has a unique story.



■ Vintage Pine VGW76T | SCB76

Gluedown		Rigid Core
48.0" x 7.0"	Plank Size	48.03" x 7.09"
20mil	Wear Layer	20mil
3mm	Thickness	4.5mm
Lifetime	Residential Warranty	Lifetime
15 years	Commercial Warranty	15 years
Begins with VGW	Product Code	Begins with SCB



■ Frosted Birch VGW83T | SCB83

Van Gogh is a fully dual-format collection: Every design is available in both gluedown and rigid core for installation.

Gluedown flooring provides limitless design possibilities. Planks and tiles can be cut and laid in patterns, complemented by design strips and decorative borders – all allowing you to create stylish custom looks or zoning that sets an area apart.


Rigid core is an easy-to-install “floating floor” – the pieces easily click and lock together, and adhesive is not required. Our rigid core flooring includes K-Core® technology that ensures a stable core for installation over most hard floors, as well as a foam backing that reduces noise to lower floors by up to 22 dB.

Van Gogh Wood Designs

Gluedown: 48.0" x 7.0" (1219.2mm x 177.8mm) | Rigid Core: 48.03" x 7.09" (1220.0mm x 180.0mm)



Natural Prime Oak: Gluedown **VGW115T** | Rigid Core **SCB115**

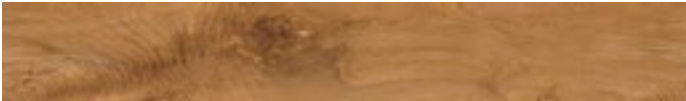

Wellington Oak: Gluedown **VGW53T** | Rigid Core **SCB53**



French Oak: Gluedown **VGW85T** | Rigid Core **SCB85**




Jatoba: Gluedown **VGW42T** | Rigid Core **SCB42**



Honey Oak: Gluedown **VGW94T** | Rigid Core **SCB94**



Classic Oak: Gluedown **VGW86T** | Rigid Core **SCB86**




Rimu: Gluedown **VGW49T** | Rigid Core **SCB49**



Hessian Oak: Gluedown **VGW93T** | Rigid Core **SCB93**



Lancewood: Gluedown **VGW44T** | Rigid Core **SCB44**



Smoked Oak: Gluedown **VGW70T** | Rigid Core **SCB70**




Natural School Cedar: Gluedown **VGW142T** | Rigid Core **SCB142**



Auburn Spotted Gum: Gluedown **VGW144T** | Rigid Core **SCB144**



Antique Karri: Gluedown **VGW39T** | Rigid Core **SCB39**



Merbau: Gluedown **VGW41T** | Rigid Core **SCB41**



Vintage Pine: Gluedown **VGW76T** | Rigid Core **SCB76**



Ohana Koa: Gluedown **VGW143T** | Rigid Core **SCB143**



Available in gluedown and rigid core installation formats.

Gluedown: 48.0" x 7.0" (1219.2mm x 177.8mm) | Rigid Core: 48.03" x 7.09" (1220.0mm x 180.0mm)



Silver Farmhouse Oak: Gluedown **VGW137T** | Rigid Core **SCB137**



Country Oak: Gluedown **VGW81T** | Rigid Core **SCB81**



Light Country Oak: Gluedown **VGW139T** | Rigid Core **SCB139**




Blond Farmhouse Oak **VGW136T** | Rigid Core **SCB136**



Aged Redwood: Gluedown **VGW100T** | Rigid Core **SCB100**



Frosted Birch: Gluedown **VGW83T** | Rigid Core **SCB83**



Smoked School Cedar: Gluedown **VGW138T** | Rigid Core **SCB138**



Reclaimed Redwood: Gluedown **VGW99T** | Rigid Core **SCB99**



Tawny Oak: Gluedown **VGW91T** | Rigid Core **SCB91**



Ebony: Gluedown **VGW89T** | Rigid Core **SCB89**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Van Gogh



■ Silver Farmhouse Oak VGW137T | SCB137

	Standard	Gluedown	Rigid Core
Size	ASTM F2421	See Index N/A	N/A See Index
Thickness	ASTM F386 ASTM F387	3.0 mm N/A	N/A 4.5 mm
Locking system ¹		N/A	Click locking system
Wear layer	ASTM F410	20 mil (0.50 mm)	20 mil (0.50 mm)
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Warranty ²	Commercial Residential	15 Years Lifetime	15 Years Lifetime
Beveled edge		Micro	Micro
Classifications		ASTM F1700: Class III Type B	ASTM F3261, resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class I	Class I
Smoke density	ASTM E662-06	Pass (< 450)	Pass (< 450)
Flammability test	ASTM D2859	Pass	Pass
Slip resistance ³	ASTM D2047	Pass (Dry 0.89)	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass	Pass
Heat fastness	ASTM F1514	Pass	Pass
Light fastness	ASTM F1515	Pass	Pass
Electrostatic propensity	AATCC 134-1996	-2.3 kv	1.1 kv
Abrasion resistance	ASTM D4060	Pass (25,000 cycles)	Pass (20,000 Cycles)
Dimensional stability	ASTM F2199	Pass	N/A
	ISO 23999	-0.002"/lin.ft N/A	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 6 dB IIC = 46 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	ΔIIC = 22 dB IIC = 69 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static load	ASTM F970	Pass (1,000 psi at 0.005")	Pass (600 psi at 0.005")
Indentation - residual	ASTM F1914	Pass	Pass
Thickness swell	NALFA 3.2	N/A	Pass (Class 4)
Flexibility	ASTM F137	Pass	N/A
Adhesive		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our installation instructions.
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332	Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD	Indoor air quality certified; Compliant low emitting VOC emissions. N/A
	ISO 14001 / ISO 9001	Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards	N/A
	ASSURE CERTIFIED™	N/A	Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
Recycling		Suitable	Suitable
Phthalate free	CPSC C-1001-09.3	Yes	Yes

¹ Produced under license from Flooring Industries

² Subject to terms. Please see our website.


³ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Opus


Our Opus collection offers designers and architects something different. With designs that skew toward modern and contemporary, Opus dramatically expands the creative palette beyond wood- and stone-inspired looks to abstracts, geometric shapes and even solid colors. The infinite creative possibilities can also be leveraged to meet the functional considerations of zoning and wayfinding.



■ Niveus **WP411**

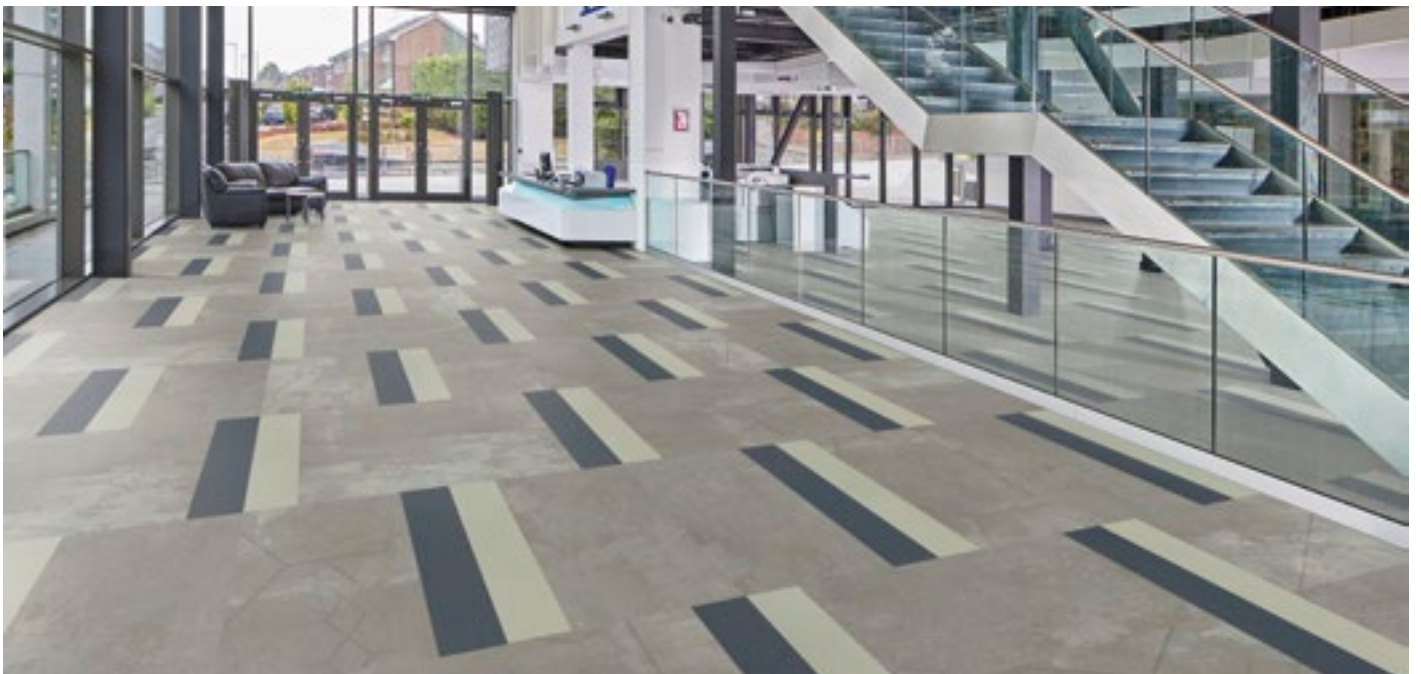

■ Indigo **SP720** | Zinc **SP722** | Contarini **SP734**

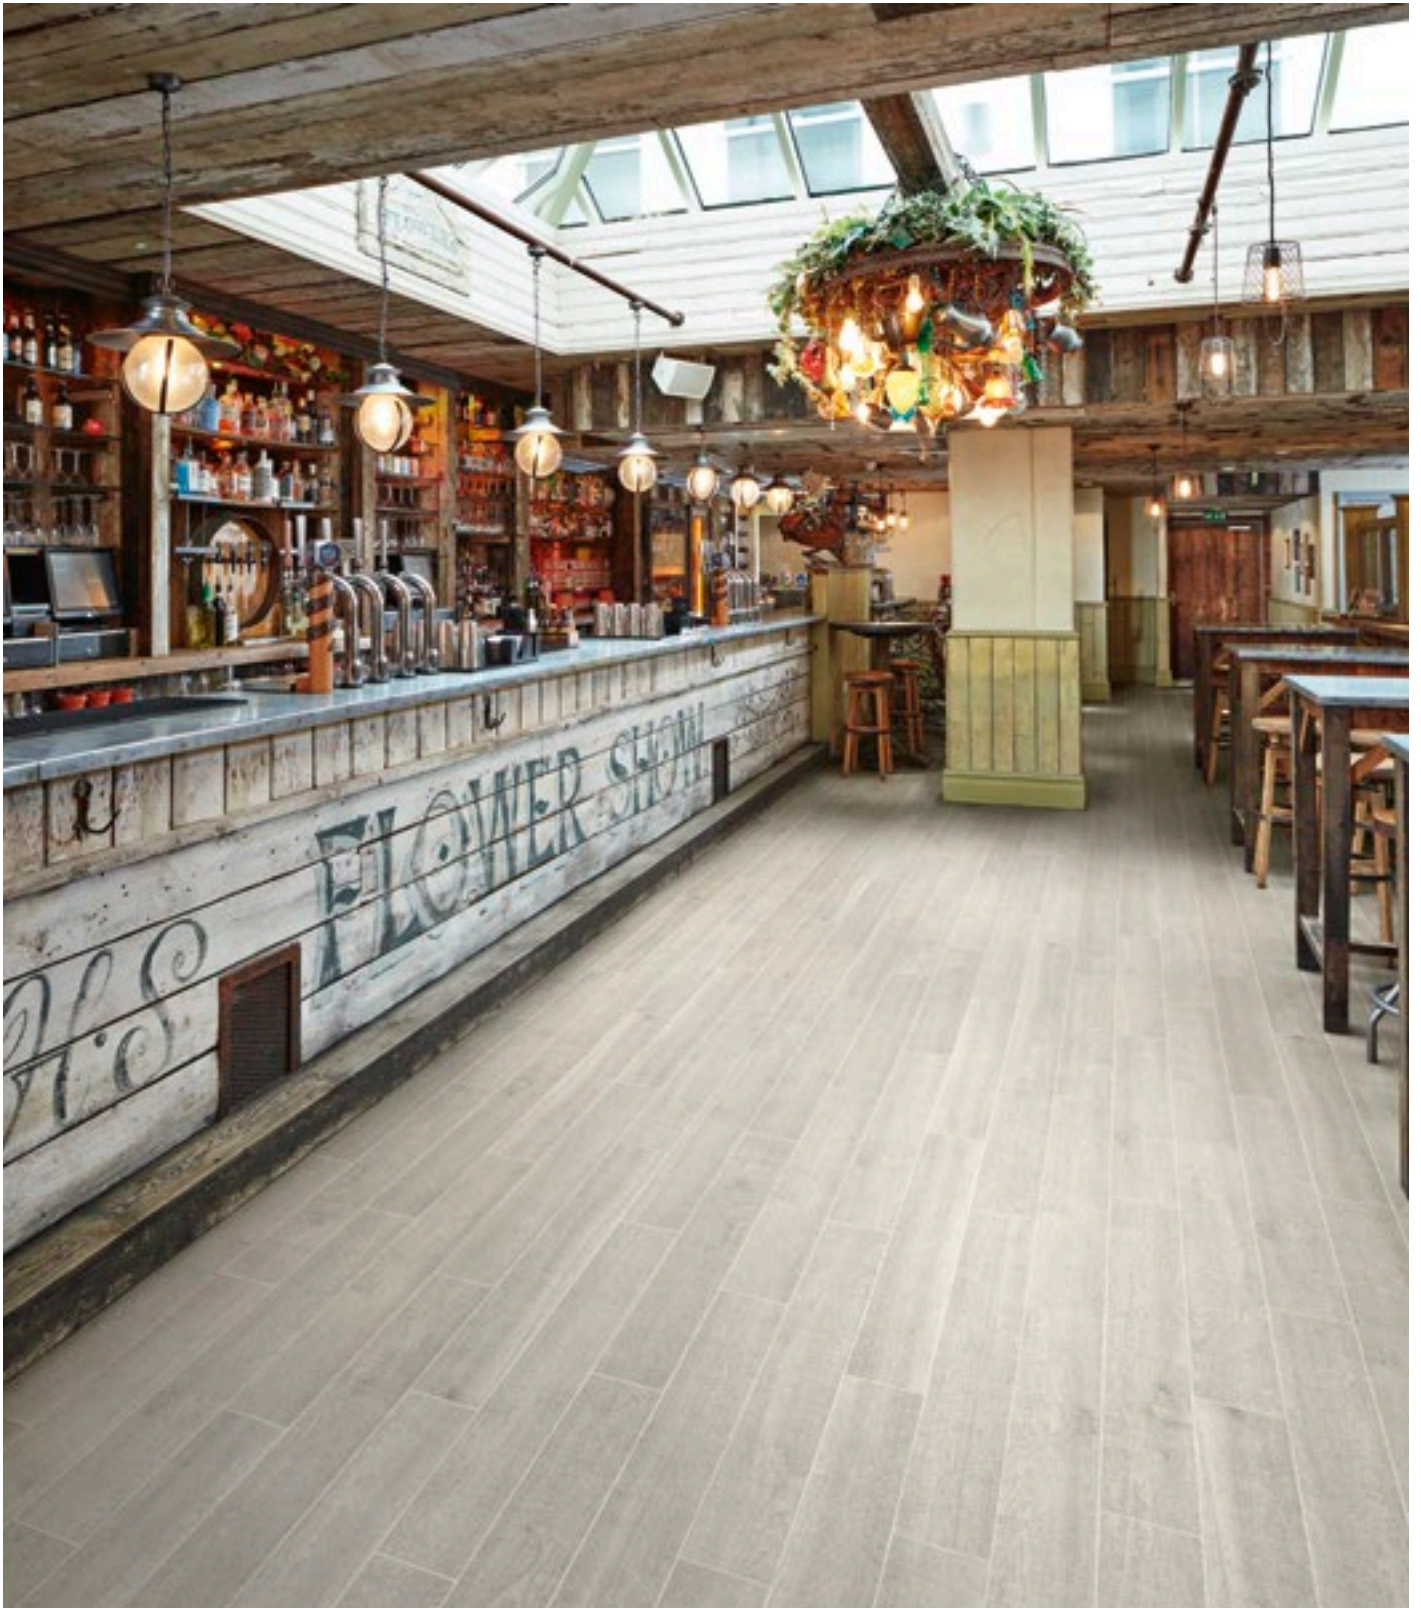

■ Textum WP331 with DS10 3mm design strip

Opus Wood Designs

Gluedown: 36.0" x 4.0" (914.4mm x 101.6mm)



Weathered Elm **WP511**

Gluedown: 36.0" x 6.0" (914.4mm x 152.4mm)



Ignea **WP313**



Canitia **WP322**



Arrado **WP325**



Luteus **WP321**



Rubra **WP316**



Natural Walnut **WP326**



Textum **WP331**



Grano **WP311**



Bleached Grey Walnut **WP329**



Washed Walnut **WP328**



Tenebra Walnut **WP330**



Carbo **WP318**

Gluedown: 48.0" x 9.0" (1219.2mm x 228.6mm)




Niveus **WP411**



Ordo **WP415**



Magna **WP413**

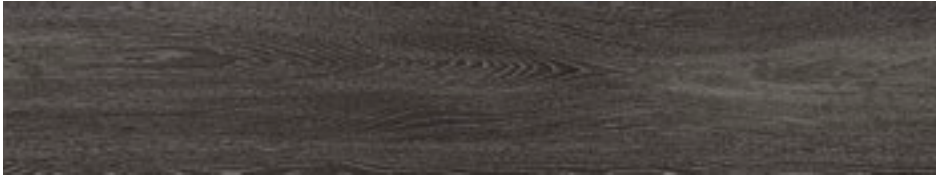

Argen **WP414**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Opus Stone Designs

Gluedown: 18.0" x 24.0" (457.2mm x 609.6mm)




Terra **SP212**



Urbus **SP213**




Fumo **SP216**

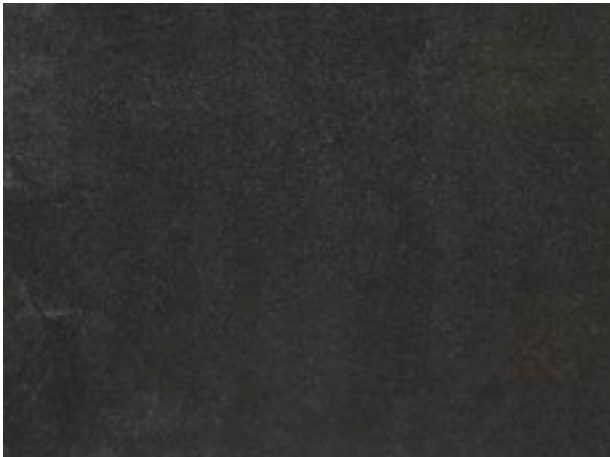

Lutum **SP218**

Gluedown: 18.0" x 18.0" (457.2mm x 457.2mm)

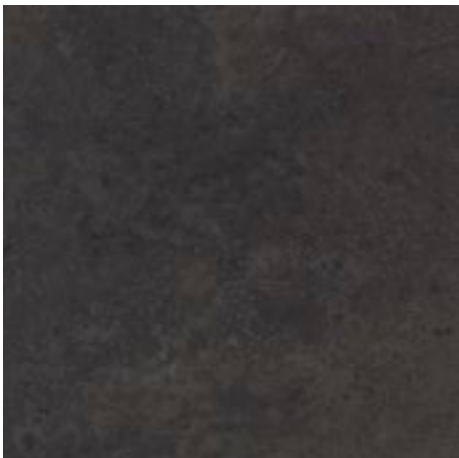

Nero **SP115**

Gluedown: 3.0" x 18.0" (76.2mm x 457.2mm)



Fumo **SM-SP216**

Gluedown: 18" x 36" (457.2mm x 914.4mm)



Stratus SP731



Clarus SP714



Umbrā SP732

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

* Same color available in different sizes.

Opus Abstract Designs


Gluedown: 18.0" x 18.0" (457.2mm x 457.2mm)



Noale **SP116**



Salute Grigio **SP118**



Luca **SP117**

Gluedown: 6.0" x 36.0" (152.4mm x 914.4mm)




Zinc **SP722**



Burnt Sienna **SP719**




Chalk Grey **SP724**



Indigo **SP720**



Yellow Ochre **SP726**




Black Iron **SP727**



Amber **SP721**

Gluedown: 18.0" x 24.0" (457.2mm x 609.6mm)



Casablanca **SP219**




Marrakesh **SP220**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Gluedown: 18.0" x 36.0" (457.2mm x 914.4mm)

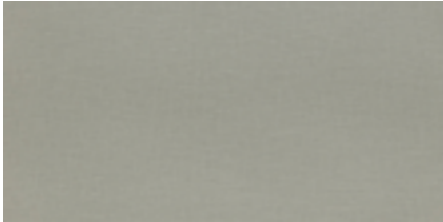

Chalk Grey **SP725**



Contarini **SP734**



San Marco **SP729**



Leoncini **SP730**




Zinc **SP723**



Tizina **SP735**



Albertina **SP733**

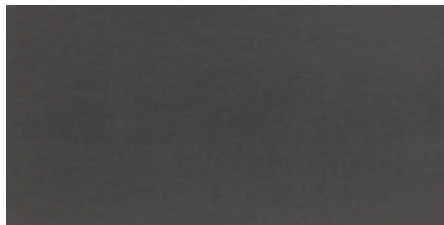


Black Iron **SP728**

Heritage Collection

Using geometric patterns to create bold, sophisticated looks, the Heritage Collection captures the opulence of traditional English architectural styles. For details, contact your Karndean representative.

Gluedown: 9.0" x 9.0" (228.6mm x 228.6mm)*





Clifton **CLIF-01**




Clifton **CLIF-04**

Gluedown: 12.0" x 12.0" (304.8mm x 304.8mm)



Mayfair **MAYF-01**



Mayfair **MAYF-02**

*Two different square tiles (represented in the line drawings above) are used to form the Clifton designs (CLIF-01 and CLIF-04). Orders arrive in the form of the individual square tiles, which are then laid together to form the Clifton designs.

Opus



■ Niveus WP411

	Standard	Gluedown
Size	ASTM F2421	See Index
Thickness	ASTM F386	2.5 mm
Wear layer	ASTM F410	20 mil (0.50 mm)
Surface treatment		K-Guard+® PU coating
Warranty ¹	Commercial Residential	15 years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (< 450)
Flammability test	ASTM D2859	Pass
Slip resistance ²	ASTM D2047	Pass (Dry 0.89)
Light fastness	ASTM F1515	Pass ΔE = 5.0
Abrasion resistance	ASTM D3884	124,000 Cycles
Dimensional stability	ASTM F2199	Pass -0.004"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB IIC = 44 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static load	ASTM F970	2,000 psi
Flexibility	ASTM F137	Pass
Adhesive		DrySet K-Spray Karndean Epoxy K99 HM
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF/ANSI 332	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Conformant product
Recycling		Suitable
Phthalate free	CPSC C-1001-09.3	Yes

¹ Subject to terms. Please see our website.

² Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.


Knight Tile

Our Knight Tile collection features both wood- and stone-inspired designs – oak and pine to marble, slate and terrazzo. With a 12 mil wear layer, Knight Tile offers a range of color tones across 26 designs, all available in both gluedown and rigid core for installation.



■ Washed Character Oak KPI44 | SCB-KPI44-6

Gluedown		Rigid Core	
36.0" x 6.0" 48.0" x 9.0"	Plank Size	36.0" x 5.91" 48.03" x 8.86"	
12.0" x 18.0"	Tile Size	12.0" x 18.0"	
12mil	Wear Layer	12mil	
2mm	Thickness	4.5mm	
Lifetime	Residential Warranty	Lifetime	
10 years	Commercial Warranty	10 years	
Begins with KP	Product Code	Begins with SCB	

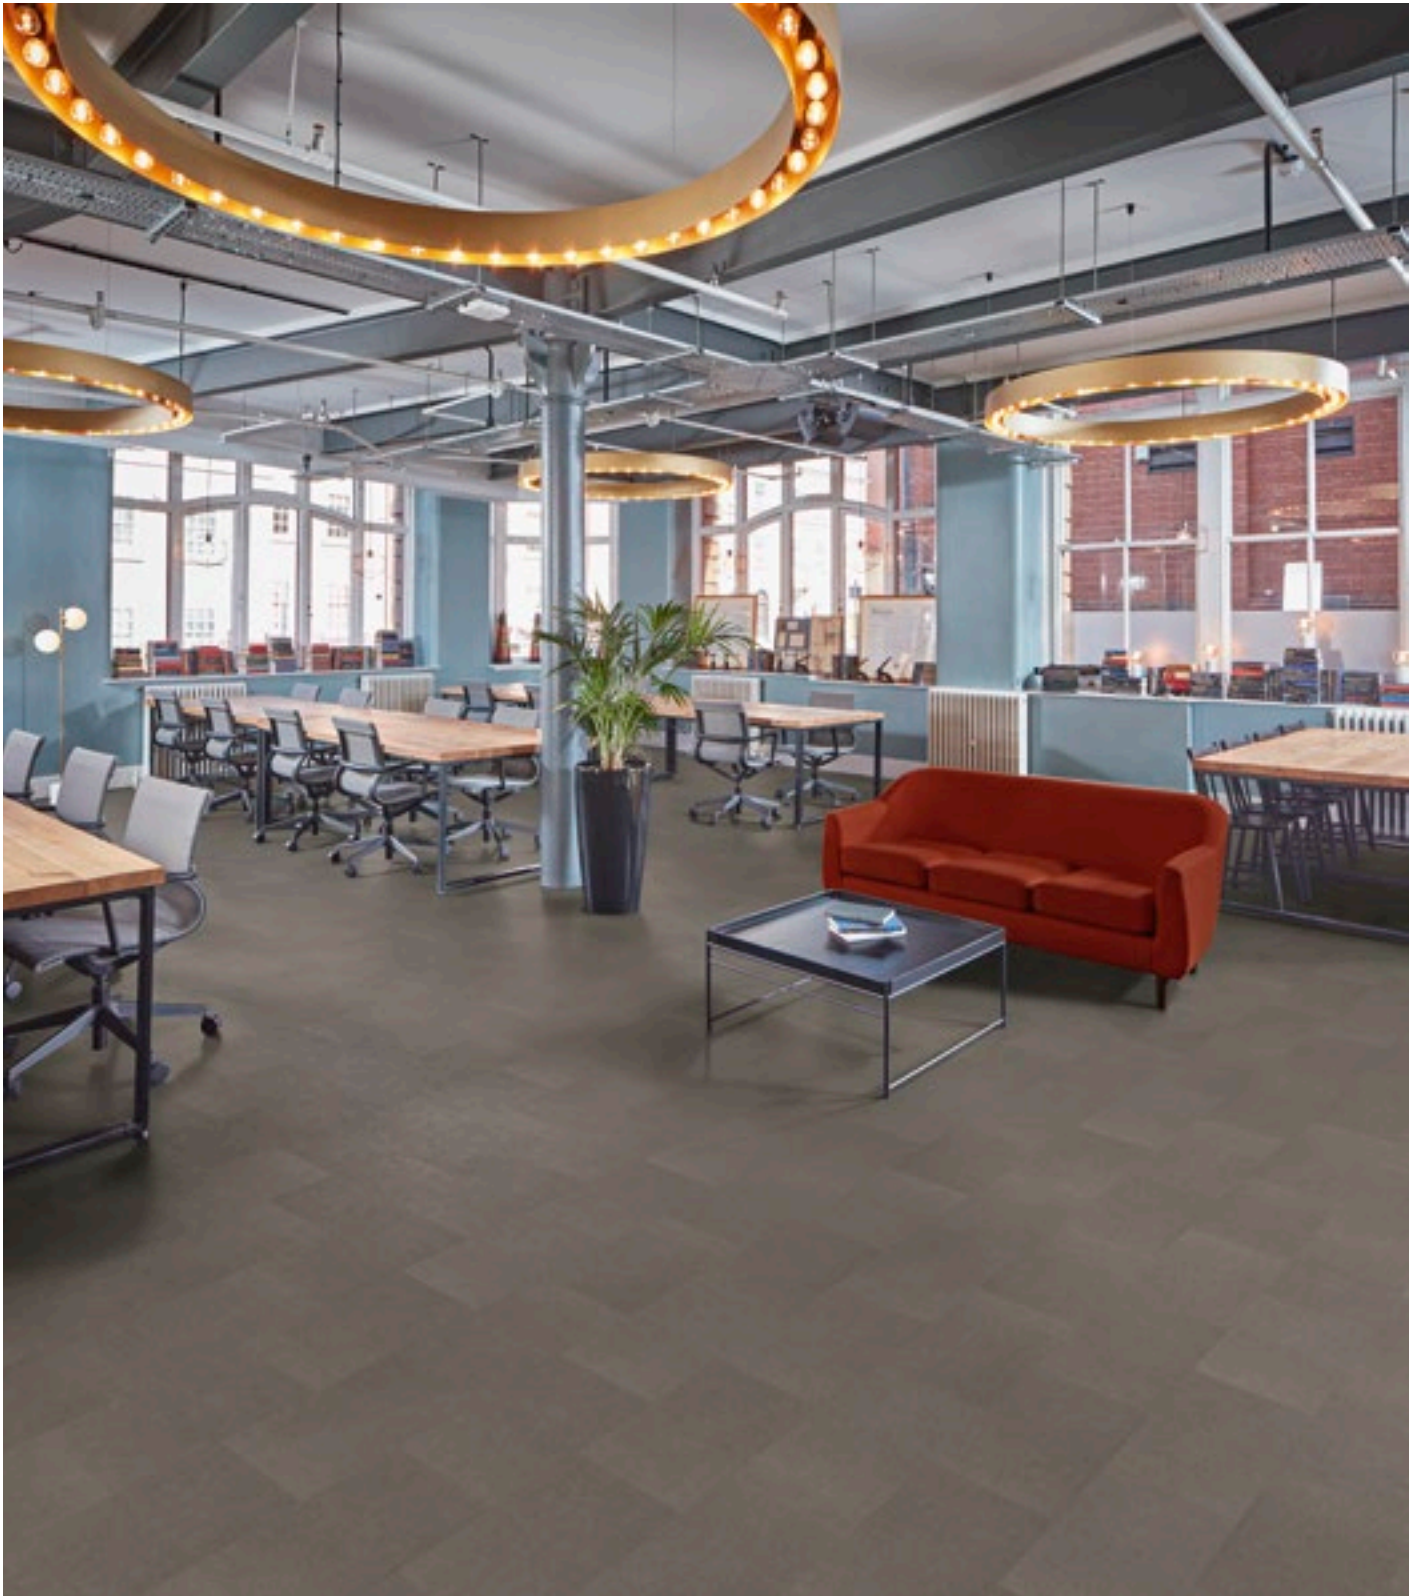

■ Bern Stone ST30 | SCB-ST30-G

Knight Tile **Wood Designs**

Gluedown: 36.0" x 6.0" (914.4mm x 152.4mm) | Rigid Core: 36.0" x 5.91" (914.4mm x 150.0mm)



Washed Character Oak: Gluedown **KPI44** | Rigid Core **SCB-KPI44-6**



Natural Character Oak: Gluedown **KPI45** | Rigid Core **SCB-KPI45-6**



Pale Limed Oak: Gluedown **KP94** | Rigid Core **SCB-KP94-6**



Classic Limed Oak: Gluedown **KP97** | Rigid Core **SCB-KP97-6**



Honey Limed Oak: Gluedown **KPI55** | Rigid Core **SCB-KPI55-6**



Mid Limed Oak: Gluedown **KP96** | Rigid Core **SCB-KP96-6**



Aged Oak: Gluedown **KP98** | Rigid Core **SCB-KP98-6**



Available in gluedown and rigid core installation formats.

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Gluedown: 36.0" x 6.0" (914.4mm x 152.4mm) | Rigid Core: 36.0" x 5.91" (914.4mm x 150.0mm)



White Painted Oak: Gluedown **KPI05** | Rigid Core **SCB-KPI05-6**



Natural Scandi Pine: Gluedown **KPI33** | Rigid Core **SCB-KPI33-6**



Dutch Limed Oak: Gluedown **KPI54** | Rigid Core **SCB-KPI54-6**




Grey Limed Oak: Gluedown **KPI38** | Rigid Core **SCB-KPI38-6**



Lime Washed Oak: Gluedown **KP99** | Rigid Core **SCB-KP99-6**



Urban Spotted Gum: Gluedown **KPI41** | Rigid Core **SCB-KPI41-6**




Shadow Studio Oak: Gluedown **KPI50** | Rigid Core **SCB-KPI50-6**

48" x 9" (1219mm x 229mm | 1220mm x 225mm)



Pale Limed Oak: Gluedown **CH-KP94** | Rigid Core **SCB-CH-KP94**

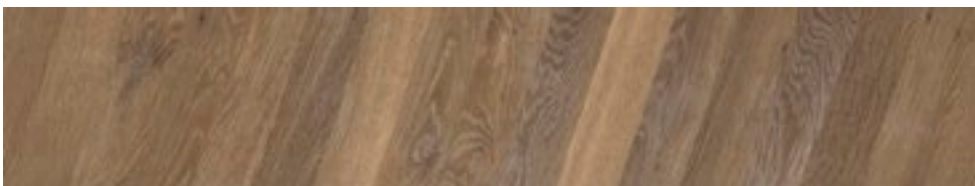

Mid Limed Oak: Gluedown **CH-KP96** | Rigid Core **SCB-CH-KP96**

Knight Tile **Stone Designs**


Gluedown: 12.0" x 18.0" (304.8mm x 457.2mm) | Rigid Core: 12.0" x 18.0" (304.8mm x 457.2mm)



Honed Oyster Slate: Gluedown **ST17** | Rigid Core **SCB-ST17-G**



Olten Stone: Gluedown **ST24** | Rigid Core **SCB-ST24-G**

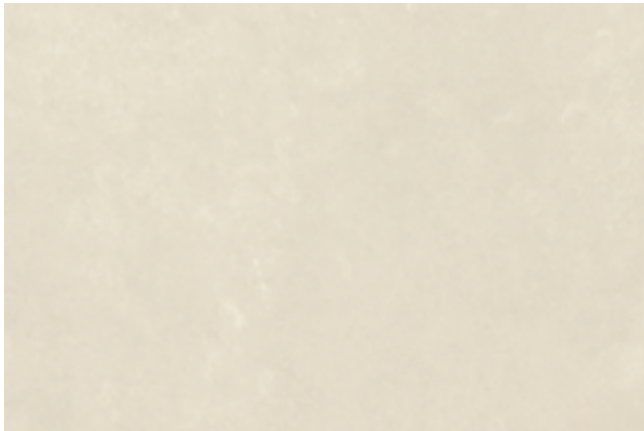


Ivory Riven Slate: Gluedown **ST18** | Rigid Core **SCB-ST18-G**



Grey Riven Slate: Gluedown **ST16** | Rigid Core **SCB-ST16-G**



River Marble: Gluedown **ST31** | Rigid Core **SCB-ST31-G**

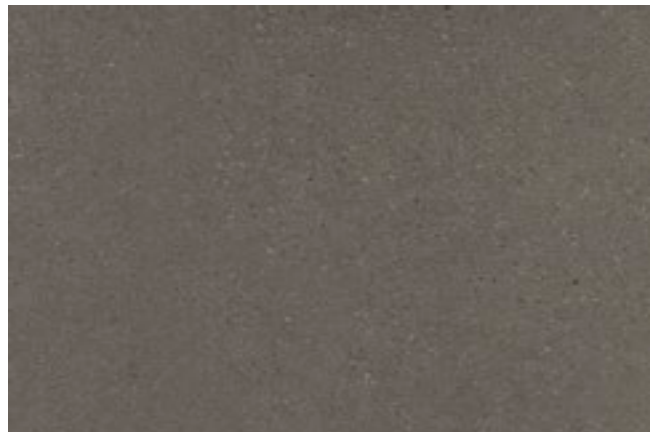

Bern Stone: Gluedown **ST30** | Rigid Core **SCB-ST30-G**



Available in gluedown and rigid core installation formats.

Gluedown: 12.0" x 18.0" (304.8mm x 457.2mm) | Rigid Core: 12.0" x 18.0" (304.8mm x 457.2mm)



Soapstone: Gluedown **ST5-18** | Rigid Core **SCB-ST5-G**



Bath Stone: Gluedown **ST12** | Rigid Core **SCB-ST12-G**



Portland Stone: Gluedown **ST13** | Rigid Core **SCB-ST13-G**



Cumbrian Stone: Gluedown **ST14** | Rigid Core **SCB-ST14-G**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Knight Tile



■ Ivory Riven Slate ST18 | SCB-ST18-G

	Standard	Gluedown	Rigid Core
Size	ASTM F2421	See Index	See Index
Thickness	ASTM F386 ASTM F387	2.0 mm N/A	N/A 4.5 mm
Locking system¹		N/A	2G™ angling installation system
Wear layer	ASTM F410	12 mil (0.30 mm)	12 mil (0.30 mm)
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Warranty²	Commercial Residential	10 Years Lifetime	10 Years Lifetime
Beveled edge		No	No
Classification		ASTM F1700: Class III Type B	ASTM F3261: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1	Class 1
Smoke density	ASTM E662-06	Pass (< 450)	Pass (< 450)
Flammability test	FF 1-70; Federal Approval ASTM D2859	Pass	Pass
Slip resistance³	ASTM D2047	Pass (Dry 0.91)	Pass (Dry 0.64)
Staining resistance	ASTM F925	Pass	Pass
Heat fastness	ASTM F1514	Pass	Pass
Light fastness	ASTM F1515	Pass	Pass
Abrasion resistance	ASTM D3884	Pass (16,000 Cycles)	Pass (14,000 Cycles)
Dimensional stability	ASTM F2199 ISO 23999	Pass N/A	N/A Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	Δ IIC = 4 dB IIC = 43 dB (6" Concrete Slab w/Drop Ceiling) IIC = 70 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	Δ IIC = 22 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 69 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static load	ASTM F970	Pass (1500 psi at 0.005")	Pass (700 psi at 0.005")
Indentation - residual	ASTM F1914	Pass	Pass
Thickness swell	NALFA 3.2	N/A	Pass (Class 4)
Flexibility	ASTM F137	Pass	N/A
Adhesive		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our installation instructions.
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ISO 14001 / ISO 9001 ASSURE CERTIFIED™	Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Conformant product Manufactured to quality and environment management systems standards N/A	Indoor air quality certified; Compliant low emitting VOC emissions. N/A Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
Recycling		Suitable	Suitable
Phthalate free	CPSC C-1001-09.3	Yes	Yes

¹ 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

² Subject to terms. Please see our website.

³ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Karndean LooseLay


Karndean LooseLay combines the best features of glued-down and floating-floor installation formats – specifically, the ability to cut and lay flooring in virtually any pattern for zoning and wayfinding, like glued-down, while requiring only minimal adhesive and subfloor preparation.

It's all possible because of the K-Wave® friction-grip backing. While the backing's primary function is to hold the flooring in place, it also reduces noise to lower floors and adds cushion for comfort. LooseLay is engineered with proprietary SureFit™ technology, which provides extra dimensional stability and eliminates the need for expansion gaps and transition strips – another key difference from rigid core. At 4.5mm thick, LooseLay transitions easily to most carpet tile.



■ Bridgeport LLP157

Wood Designs	LooseLay Specs	Stone Designs
41.34" x 9.84" 59.06" x 9.84"	Sizes	19.69" x 24.02"
33.91 32.29	ft ² Per Box	32.83
20 mil	Wear Layer	20 mil
4.5 mm	Thickness	4.5 mm
Lifetime	Residential Warranty	Lifetime
15 Years	Commercial Warranty	15 Years
Begins with LLP	Product Code	Begins with LLT
33	Colors Available	10

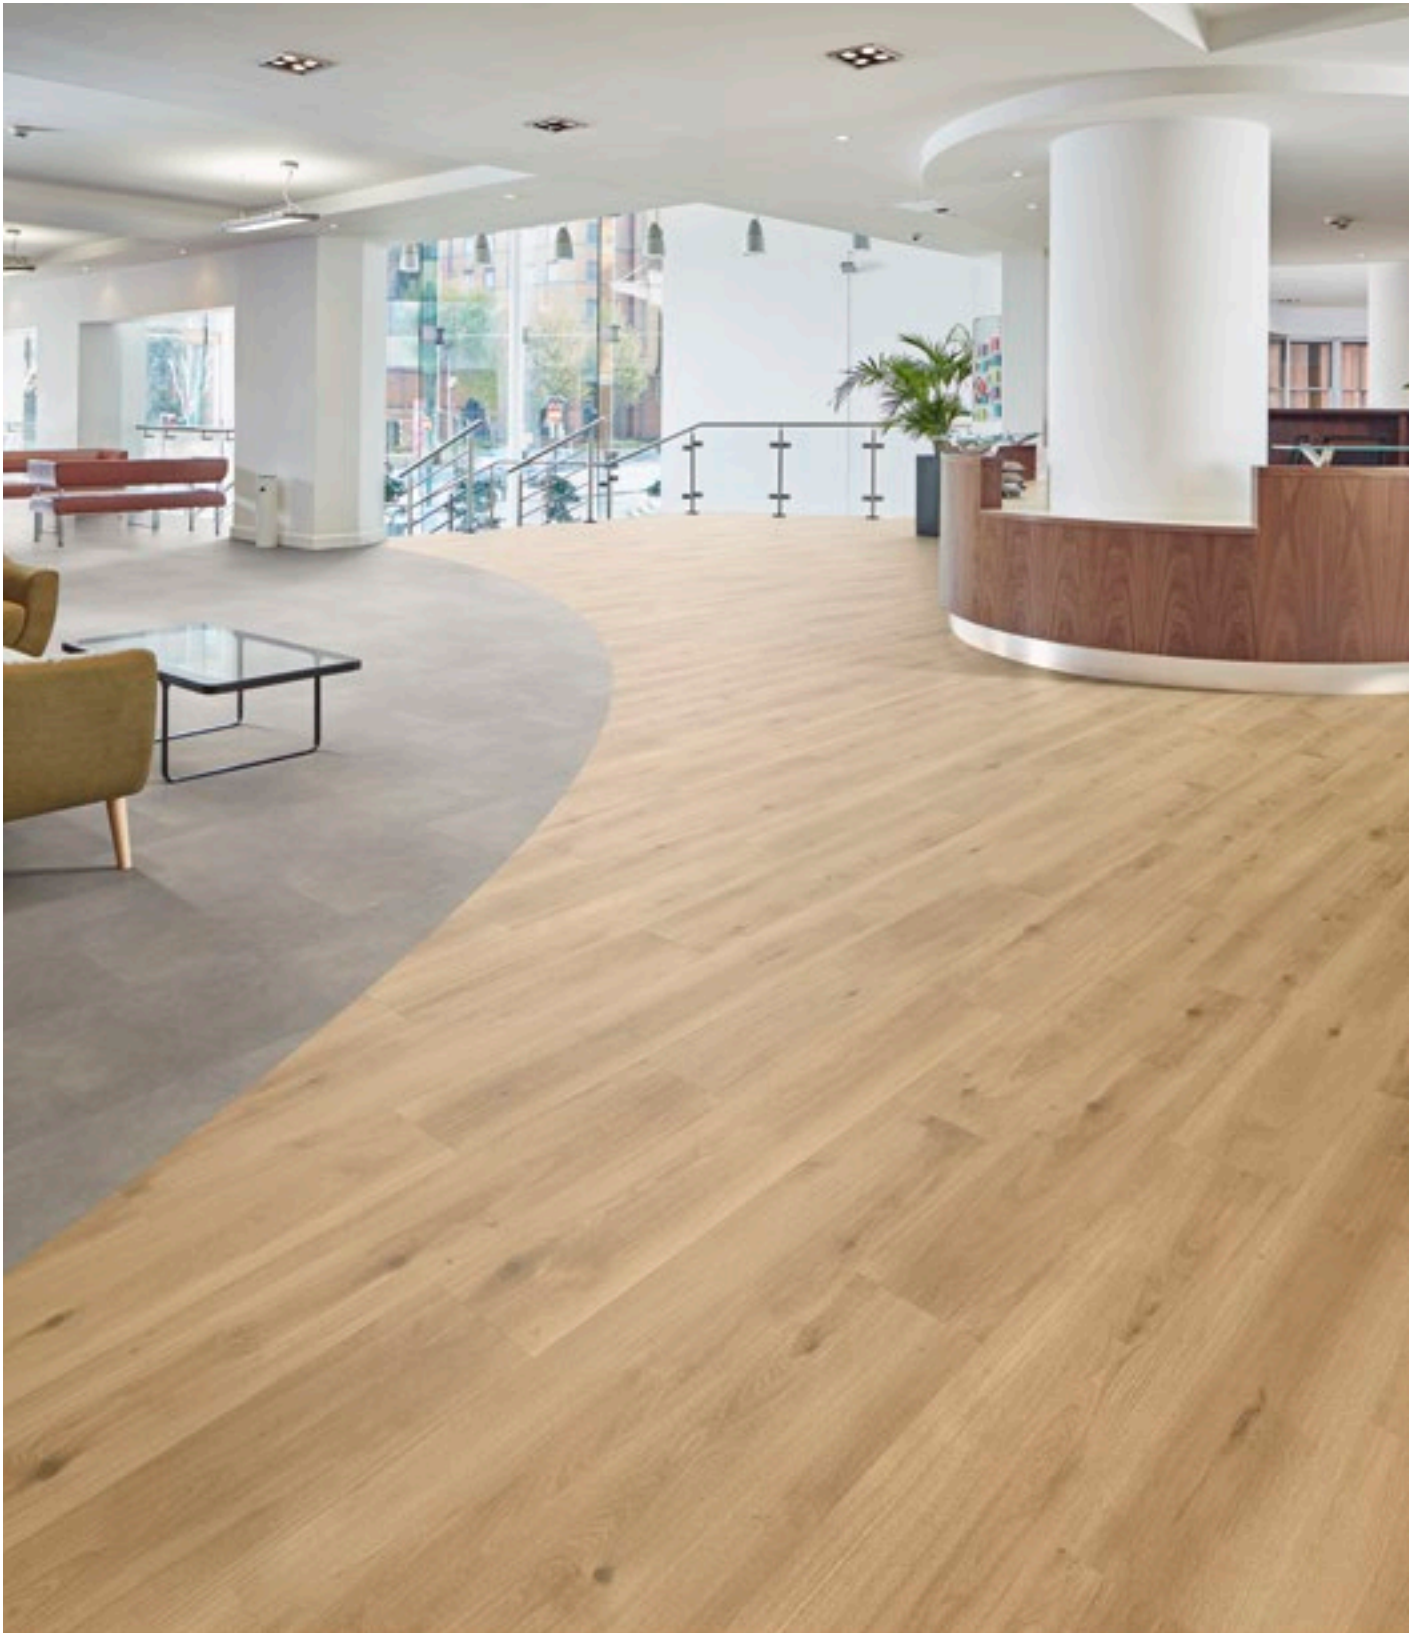

■ Golden Danish Oak **LLP359** | Dakota **LLT212**

Karndean LooseLay **Wood Designs**

59.06" x 9.84" (1500.0mm x 250.0mm)



Pure Danish Oak **LLP357**



Pearl Oak **LLP306**



Field Oak **LLP356**



Alpine Oak **LLP352**



Nude Danish Oak **LLP358**



Cashmere Oak **LLP353**



Worn Fabric Oak **LLP330**



Wheat Oak **LLP355**



Champagne Oak **LLP310**



Weathered Heart Pine **LLP304**



Lemon Spotted Gum **LLP317**



Sterling Oak **LLP354**



Neutral Oak **LLP307**



Taupe Oak **LLP309**



Reclaimed Heart Pine **LLP305**



French Grey Oak **LLP308**



Golden Danish Oak **LLP359**




Shorebird Ash **LLP360**



Character Walnut **LLP315**



Swan Bay Ash **LLP361**




Antique Heart Pine **LLP303**



Twilight Oak **LLP301**

41.34" x 9.84" (1050.0mm x 250.0mm)



Country Oak **LLP92**



Cambridge **LLP113**



Ashland **LLP95**



Newport **LLP94**



Palmaria **LLP149**



Antique Karri **LLP39**



Bridgeport **LLP157**



Danbury **LLP154**



Stamford **LLP109**



Boston **LLP111**



Hartford **LLP112**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Karndean LooseLay Stone Designs

19.69" x 24.02" (500.0mm x 610.0mm)



Indiana **LLT202**



Georgia **LLT206**



Capri **LLT209**



Arizona **LLT200**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

19.69" x 24.02" (500.0mm x 610.0mm)



Seattle **LLT214**




Dakota **LLT212**




Colorado **LLT201**



Vermont **LLT217**

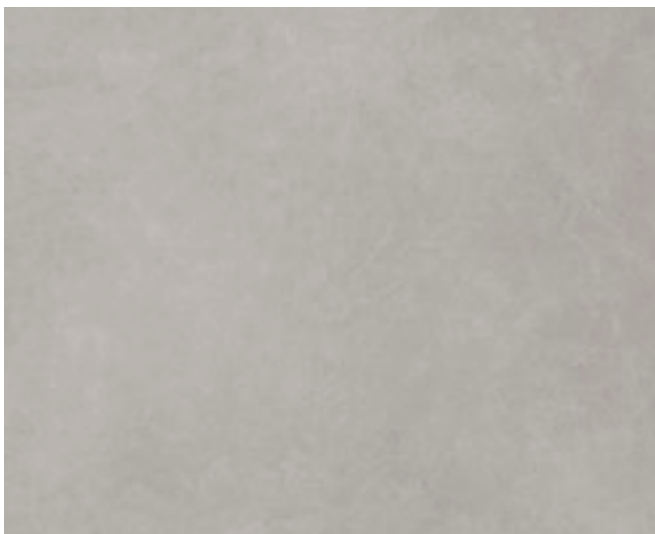

Ontario **LLT218**

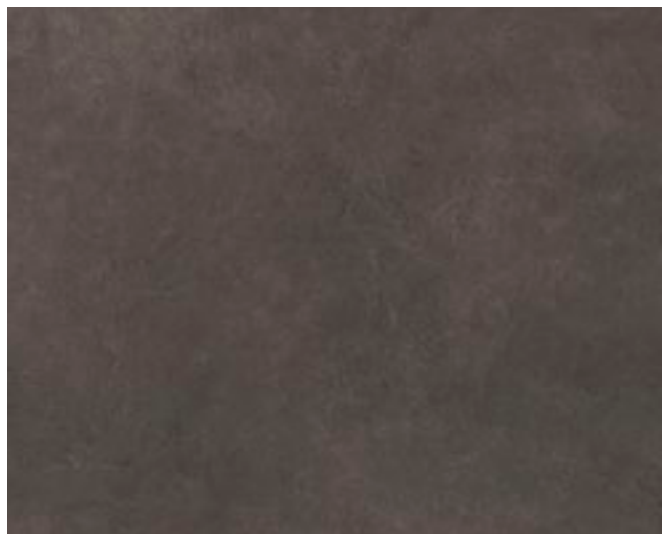

Vulcano **LLT211**

Karndean LooseLay

Fast, Easy Installation

Karndean LooseLay features our K-Wave® friction-grip backing to hold the floor in place without adhesive, making it easy to install over most hard subfloors – and easy to remove, replace or reuse.

From a performance standpoint, K-Wave® helps reduce noise to lower floors by 16 dB while providing cushion for extra comfort.



	Standard	Loose Lay
Size	ASTM F2421	See Index
Thickness	ASTM F386	4.5 mm
Wear layer	ASTM F410	20 mil (0.50 mm)
Surface treatment		K-Guard+® PU coating
Warranty¹	Commercial Residential	15 years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Staining resistance	ASTM F925	Pass
Smoke density	ASTM E662-06	Pass (< 450)
Flammability test	ASTM 2859	Pass
Slip resistance²	ASTM D2047	Dry 0.92
Light fastness	ASTM F1515	Pass
Abrasion resistance	ASTM D3884	113,000 Cycles
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	Δ IIC = 16 dB IIC = 56 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static load	ASTM F970	1,000 psi
Flexibility	ASTM F137	Pass
Electrostatic propensity	AATCC 134-1996	Pass
Indentation - residual	ASTM F1914	Pass
Adhesive	Please refer to our installation instructions.	
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free	CPSC C-1001-09.3	Yes

¹ Subject to terms. Please see our website.

² Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Korlok Select

Korlok Select features stylish designs inspired by woods and stones from around the world – a koa tree in Hawaii to marble from an Italian mountain quarry.

Offering fast, easy installation, Korlok Select is a rigid core product that clicks and locks in place, without the need for adhesive, and can be installed over most hard subfloors, facilitating quicker turnaround. In addition, the product's foam backing reduces noise to lower floors by up to 22 dB.



■ Ivory Brushed Oak RKP8217



5G® Locking Mechanism

Korlok Select can be installed with confidence. The 5G® locking mechanism securely locks pieces at the end seams with a single click. It's technology that's backed by our HoldFast™ warranty.



■ Brunella Marble RKT3013-G

Korlok Select **Wood Designs**

55.91" x 8.86" (1420.0mm x 225.0mm)



Ivory Brushed Oak **RKP8217**



Washed Grey Ash **RKP8104**




Texas White Ash **RKP8105**



Canadian Urban Oak **RKP8116**



Baltic Coastal Oak **RKP8236***



Smoked Butternut **RKP8107**




Oyster Oak **RKP8202**



Washed Velvet Ash **RKP8102**



Baltic Washed Oak **RKP8101**



Smoked Koa **RKP8126***



Shadow Oak **RKP8203***



Reclaimed French Oak **RKP8109**

*These products are not available in Canada.

55.91" x 8.86" (1420.0mm x 225.0mm)



Warm Ash **RKP8103**



Washed Butternut **RKP8108**



Barley Oak **RKP8206**



Baltic Limed Oak **RKP8111**



Warm Brushed Oak **RKP8215**



Glenmore Oak **RKP8237***



Braemar Oak **RKP8238***



Kilauea Koa **RKP8124***



Natural Koa **RKP8122***



Salvaged Barnwood **RKP8209**



Cathedral Oak **RKP8114**



Antique French Oak **RKP8110**

23.46" x 5.87" (596.0mm x 149.0mm)



Texas White Ash **SM-RKP8105***



Canadian Urban Oak **SM-RKP8116***



Salvaged Barnwood **SM-RKP8209***

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Korlok Select Stone Designs

17.99" x 23.62" (457.0 x 600.0mm)



Brunella Marble **RKT3013-G**



Metro Grey **RKT3007-G**



Volcanic Slate **RKT3001-G**



Palazzo Marble **RKT3012-G**



Coastal Fog **RKT3004-G**



Oxford Grey **RKT3008-G**



Alpine Lace **RKT2408***



Pebble Grey **RKT3009-G**



Black Sands **RKT3006-G**



Arctic Mist **RKT3005-G**

InteGrout®

Most Korlok Select stone designs include InteGrout®, a nonporous, stain-resistant feature that's seamlessly attached to the tiles. It provides the realistic look of grout while eliminating the time (and mess) associated with using the real thing during installation.

*These designs do not feature InteGrout®

17.99" x 23.62" (457.0 x 600.0mm)




Aged Parchment **RKT3011-G**



Sandstorm **RKT3010-G**



Antique Copper **RKT3002-G**

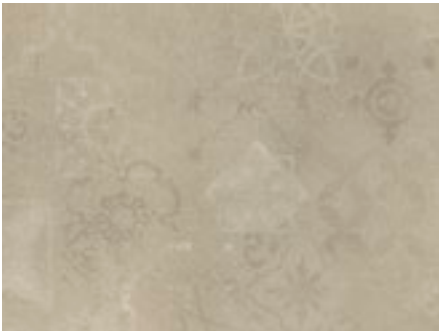


Shadow Lace **RKT2407***



Mountain Slate **RKT3003-G**

5.87" x 23.46" (149.0mm x 596.0mm)



Brunella Marble
SM-RKT3013-G



Palazzo Marble
SM-RKT3012-G


Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Korlok Select



■ Black Sands RKT3006-G

	Standard	Rigid Core
Size	ASTM F2421	See Index
Thickness	ASTM F387	6.5 mm
Locking system ¹		5G® Fold Down installation system ² 
Wear layer	ASTM F410	20 mil (0.50 mm)
Surface treatment		K-Guard+® PU coating
Warranty ²	Commercial Residential	15 years Lifetime
Beveled edge		Micro
Standards	ASTM F3261	Pass: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Flammability	ASTM D2859	Pass
Slip resistance ³	ASTM D2047	Pass (Dry > 0.8)
Staining resistance	ASTM F925	Pass (No change)
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134-1996	1.6 kV
Abrasion resistance	ASTM D4060	Pass (36,000 Cycles)
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static Load	ASTM F970	Pass (800 psi at 0.005")
Indentation - residual	ASTM F1914	Pass
Thickness swell	NALFA 3.2	Pass (Class 4)
Thermal resistance	ISO 8302	0.052 m ² K/W Suitable for underfloor heating. Max 85°F
Adhesive	None required; please install according to our installation instructions.	
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ASSURE CERTIFIED™ ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Sustainability Assessment for Resilient Floor Coverings; Silver certified product Conformance with Rigid Core Flooring Standard SCS-0011 V1-0 Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free	CPSC-C1001-09.3	Yes

¹ 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

² 5G® along short edge; 2G™ long edge except SM-RKP8105, SM-RKP8116, SM-RKP8208, SM-RKP8209, SM-RKP8211, SM-RKT3012-G and SM-RKT3013-G which are modified 2G™ on short edge and standard 2G™ on long edge.

³ Subject to terms. Please see our website.

⁴ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Korlok Reserve

Oak, elm, maple and more - the Korlok Reserve collection features designs inspired by a variety of woods, with the natural character enhanced through techniques such as oiling, liming and fuming.

All Korlok Reserve designs are in a rigid core format for fast, easy installation. Korlok Reserve clicks and locks into place, without the need for adhesive, and can be installed over most hard subfloors, facilitating quicker turnaround. In addition, the product's foam backing reduces noise to lower floors by up to 22 dB.



■ Aged Spanish Oak RCP6535



■ Smoked American Maple RCP6545

Korlok Reserve **Wood Designs**

48.03" x 7.05" (1220.0mm x 179.0mm)



Weathered Oak **RCP6532**



Millstone Sycamore **RCP6546**



Natural Oiled Oak **RCP6536**



North American Oak **RCP6533**



Vintage Oregon Oak **RCP6531**



Aged Spanish Oak **RCP6535**


48.03" x 7.05" (1220.0mm x 179.0mm)



Smoked American Maple **RCP6545**



Charred Weathered Pine **RCP6539**

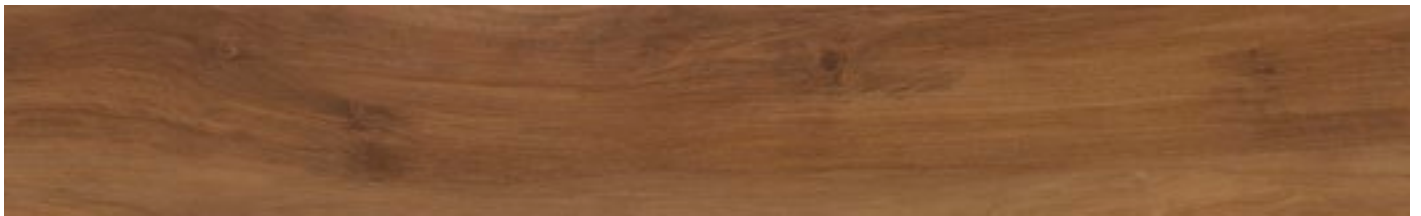

Marron Elm **RCP6543**



Limed Coastal Oak **RCP6534**



Ghost Elm **RCP6544**




Grey Oiled Oak **RCP6541**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

Korlok Reserve

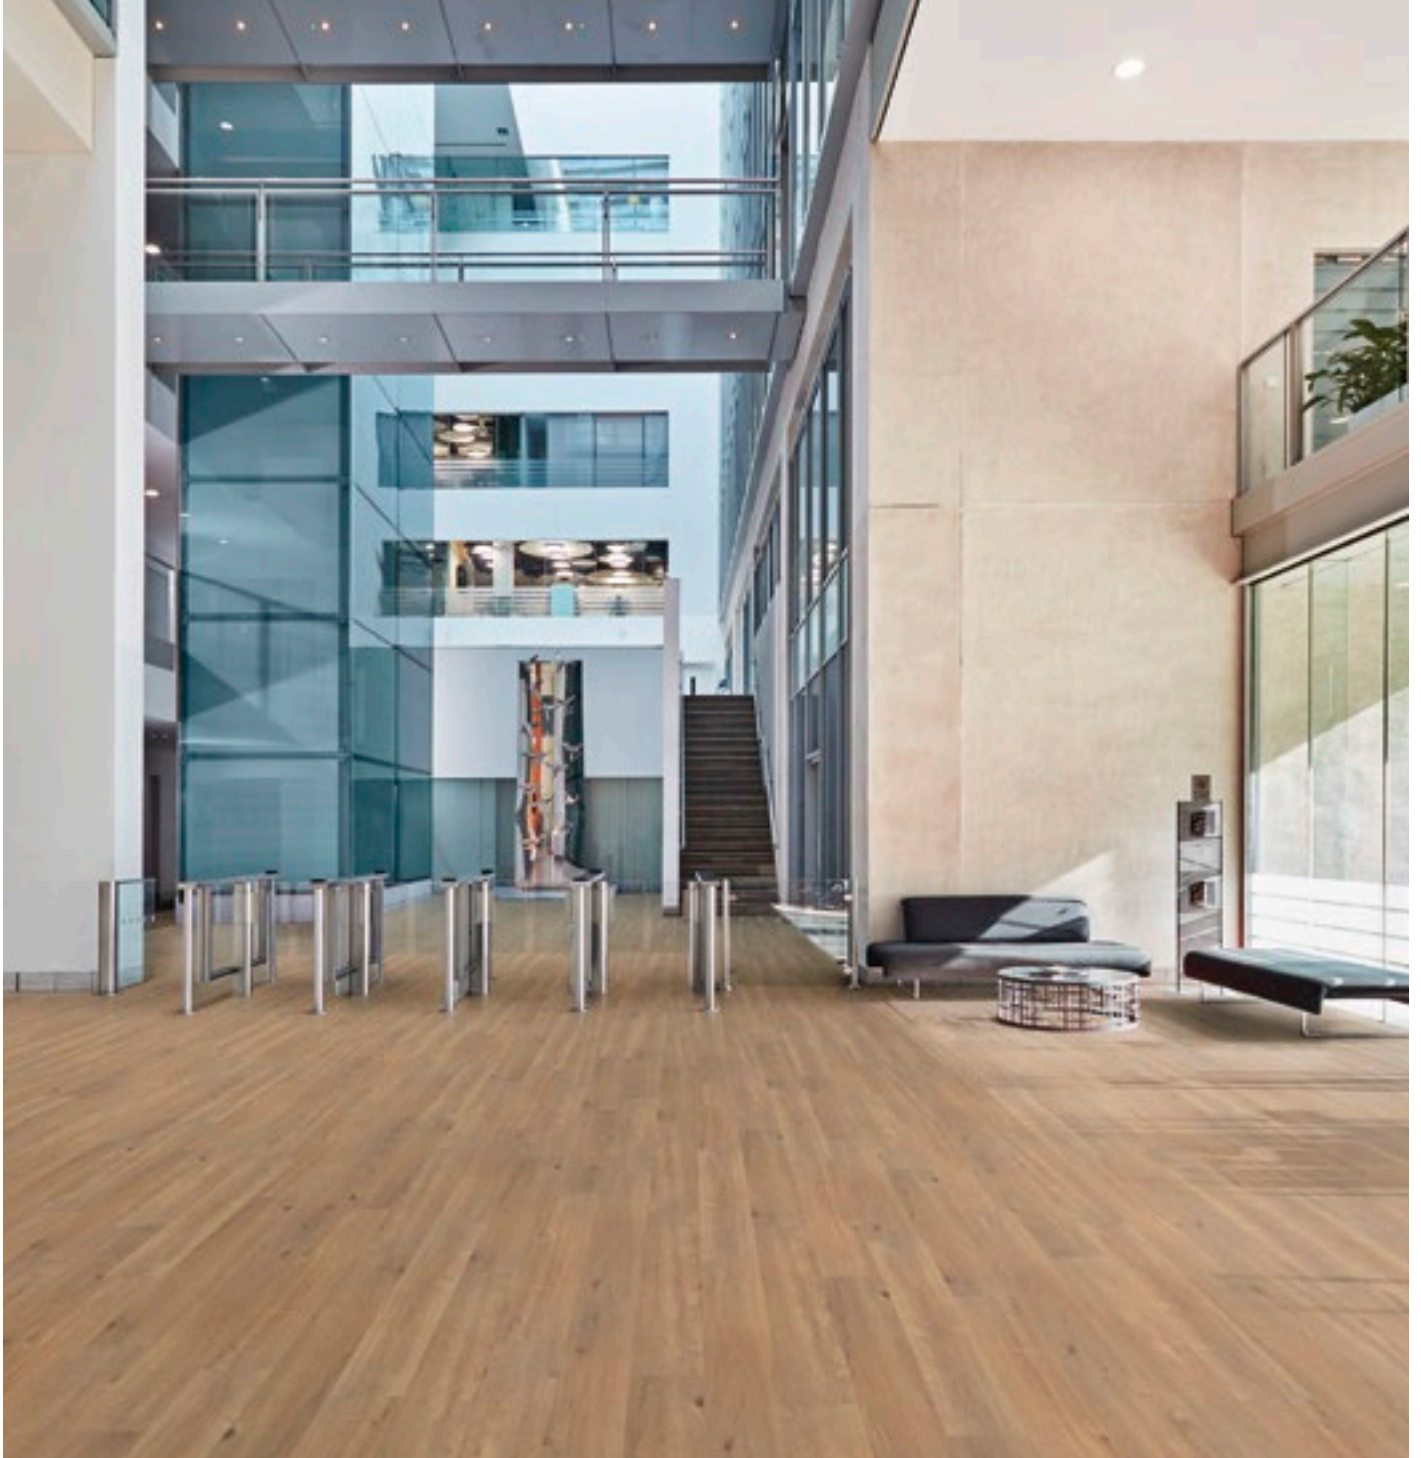

■ North American Oak RCP6533

	Standard	Rigid Core
Size	ASTM F2421	See Index
Thickness	ASTM F387	6.5 mm
Locking system ¹		2G™ angling installation system
Wear layer	ASTM F410	20 mil (0.50 mm)
Surface treatment		K-Guard+® PU coating
Warranty ³	Commercial Residential	15 years Lifetime
Beveled edge		Micro
Standards	ASTM F3261	Pass: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Flammability	FF 1-70; Federal Approval	Pass
Slip resistance ⁴	ASTM D2047	Pass (Dry > 0.8)
Staining resistance	ASTM F925	Pass (No change)
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134-1996	-1.4 kV
Abrasion resistance	ASTM D4060	Pass (20,000 Cycles)
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	Δ IIC = 21 dB IIC = 69 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static Load	ASTM F970	Pass (650 psi at 0.005")
Indentation - residual	ASTM F1914	Pass
Thickness swell	NALFA 3.2	Pass (Class 4)
Thermal resistance	ISO 8302	0.052 m ² K/W Suitable for underfloor heating. Max 85°F
Adhesive	None required; please install according to our installation instructions.	
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ASSURE CERTIFIED™ ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Sustainability Assessment for Resilient Floor Coverings; Silver certified product Conformance with Rigid Core Flooring Standard SCS-0011 VI-0 Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free	CPSC-C1001-09.3	Yes

1 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 Subject to terms.

3 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values

Design Strips

Design strips are narrow pieces of LVT that can be installed between glued-down planks and tiles. They can be used strictly for aesthetic purposes, like borders, or to create zoning or wayfinding.

Standard design strips available from stock are shown on pages 92-93.

Design strips cut from products not shown are available through our custom service with a standard surcharge per order and delivery time of 4-6 weeks.

Contact your Karndean representative for more information, or call customer service at 888-266-4343.



Better Performance

Unlike grout, our nonporous LVT strips don't stain, get discolored or harbor bacteria. They don't need to be sealed, and they won't crack with temperature fluctuations.

To confirm compatibility with the gluedown flooring you're considering, contact your Karndean representative, or call customer service at 888-266-4343.



■ Ivory Riven Slate **ST18** DS12 3mm design strip

Design Strips

Widths available:



3mm



10mm

Design Strips are LVT that can be used with gluedown flooring, available in two widths: 3mm and 10mm.



DS01 Vanilla



DS03 Honey



DS04 Coffee



DS05 Russet




DS06 Chocolate




DS07 Ebony



DS09 Carbon Cross Grain



DS10 Chalk



DS12 Concrete



DS15 Clay



DS16 Charcoal



DS17 Silver



DS20 Sand



DS22 Graphite*

*Only available with Knight Tile gluedown floors.

Grout Strips are LVT that can be used with gluedown flooring from the Art Select, Opus and Knight Tile collections. Grout Strips are 3mm wide.



AF06 Beige



AF05 Ivory



AF04 Taupe



AF02 Brown



AF07 Chestnut



AF01 Black

Please note: To confirm compatibility of Design Strips and Grout Strips with the gluedown flooring you're considering, contact your Karndean representative, or call customer service at 888-266-4343.

3mm x 75 linear feet | Pack quantity: 25 strips
10mm x 75 linear feet | Pack quantity: 25 strips


Design Borders

Add a stylish look or create zoning with custom borders. With our templates as a starting point, you can use an order form to determine colors, widths and pricing. For more information, contact your Karndean representative, or call customer service at 888-266-4343.




Please note: Many of the textures and effects common to natural materials are inherent in our products and may appear within design components. We therefore cannot accept any returns on the basis of these effects.


Custom Design Border Templates




Block




Davyne 1 color




Davyne 2 color




Diamond



Kousa



Kousa Framed




Leaf




Mackintosh




Mosaic



Quadrant



Regent



Weave



Windsor



Zig Zag



■ Grey Limed Oak **KPI38**
with **Quadrant** border (custom)

Please note: Orders for custom borders must be confirmed with customer signature before processing begins. For more information, contact your Karndean representative, or call customer service at 888-266-4343.

Emblems and Logos

Incorporate a unique element like the examples below. For more information, contact your Karndean representative, or call customer service at 888-266-4343.



Cartwheel with border 36" x 36"



Cartwheel 36" diameter



Celtic 36" diameter



Galaxy 36" diameter



Star **36" diameter**



Nexus **33" diameter**



■ Nexus feature and DS10 3mm design strip

Please note: Orders for custom features must be confirmed with a customer signature before processing. The appearance of the natural characteristics that inspire our products may be present in custom flooring and cannot be used as the basis for returns.

Solid Colors

Use solid colors for zoning, wayfinding or simply as a complementary element in the design of your space. Solid colors are only available in gluedown for installation. Our solid colors are custom orders that may have longer lead times. For details, contact your Karndean representative, or call customer service at 888-266-4343




Thickness 3.0mm | Wear Layer 30 mil



Thickness 3.0mm | Wear Layer 30 mil




Thickness 3.0mm | Wear Layer 30 mil



Thickness 3.0mm | Wear Layer 30 mil



Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil



Thickness 3.0mm | Wear Layer 30 mil



Thickness 3.0mm | Wear Layer 30 mil



Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil




Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil

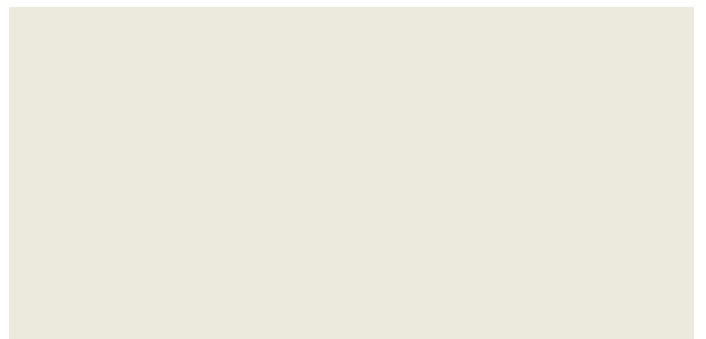

Thickness 2.5mm | Wear Layer 20 mil

Adhesives and Flooring Products

Our adhesives and other flooring products are formulated to ensure optimum performance of your Karndean floor. We require use of these products for installation. To order, call customer service at 888-266-4343. For installation instructions, refer to information with each product, or go to the Technical Resources section of our website for installation guides.



Epoxy Adhesive

A two-part adhesive that creates a strong bond and is recommended for areas subject to extreme temperatures. Covers 130 ft² to 150 ft² per gallon.



QuietChoice Acoustic Underlayment

- Covers 100 ft² per roll
- Achieve an IIC up to 72 when using QuietChoice and Karndean Designflooring luxury vinyl products (ASTM E492)
- Resists mold and mildew
- High shear strength



K99 HM

- Trowel application
- Available in 1 gallon or 4 gallon pails
- Covers 220 ft² to 260ft² per gallon
- Two-hour open time
- Can be used on substrates with moisture readings up to 99% RH
- High shear strength



Designflooring Tool Kit

- Combi scribe
- Miter box scissors
- Pressure duo roller
- FasTrimmer top and bottom beveler
- Flex steel straightedge
- Dolphin knife



Karndean K-Spray

- 22 oz. can
- Covers 150 ft² to 185 ft² per can
- Can be used on substrates with moisture readings up to 95% RH
- Dries in 10 to 20 minutes
- Uses 80% less adhesive compared with trowel-applied epoxy and bucket adhesives



Karndean DrySet Adhesive

- Available in 1 gallon or 4 gallon pails
- Covers 350 ft² to 450 ft² per gallon
- Can be used on substrates with moisture readings up to 95%
- Dries in 10 to 15 minutes
- Applied with 3/8" nap roller

KOVARA® 95

KOVARA® 95
2" Gray Seam Tape
KOVARA® 95 Kit
including tape

- Rolled-sheet moisture-mitigation membrane
- Rolls are 5 feet wide x 144 feet long
- 720 ft² per roll
- Suppresses moisture up to 99% RH
- Mold- and fungus-resistant
- Must use **KOVARA® 95 Seam Tape**

KOVARA® MBX

KOVARA® MBX
4" White Double-Sided Tape
(2 rolls)
2 1/2" Blue Seam Tape

- Rolled-sheet moisture-mitigation membrane
- Rolls are 5 feet wide x 144 feet long
- 720 ft² per roll
- Suppresses moisture up to 99% RH in concrete
- Mold- and fungus-resistant
- Must use **KOVARA® MBX Seam Tape** and **KOVARA® DS Seam Tape**



resources and support

Inspiration through installation, we're proud to provide support from start to finish. Our website, karndeancommercial.com, features a suite of digital tools to help you choose and spec the right products. And when it's time to order, we carry strong inventory across three regional facilities to ensure it gets there fast.

As a family-owned business for 50 years and counting, we're committed to more than creating stylish, durable LVT.

We're committed to you.

DIGITAL TOOLS

We want to make it easy to choose and specify our products. Use our website for spec tools, technical resources, ordering samples, inspiration and more: karndeancommercial.com.



Material Bank

It's a source of discovery for over 100,000 architects and designers. Use Material Bank to find our products, order samples, and have them by next day.

materialbank.com



360 Interactive Tour

Get an immersive first-person look at some of our most popular LVT designs. Explore a variety of spaces, from an office setting to an upscale bar – all from the convenience of your computer, tablet or phone.

Go to karndean.com/360tour



BIM Objects Library



Access and download our entire portfolio of wood, stone and abstract designs as BIM components. BIM objects allow you to bring together 3D color models and technical details in one place, providing visibility for both team members and clients – and reducing the possibility of miscommunication and costly errors.



Technical Resources

This section of our website is where you'll find commonly needed information and resources, from technical data sheets and installation instructions to the ARCAT® SpecWizard tool.


karndean.com/en/commercial-flooring/technical

FLOORSTYLE VISUALIZER

See what our flooring designs look like in a variety of virtual commercial settings – or upload photos to see the designs in the actual space for your project. Floorstyle is an easy way to compare designs, experiment with lay patterns, and decide on the perfect look.



You can also
download CAD files
through Floorstyle.

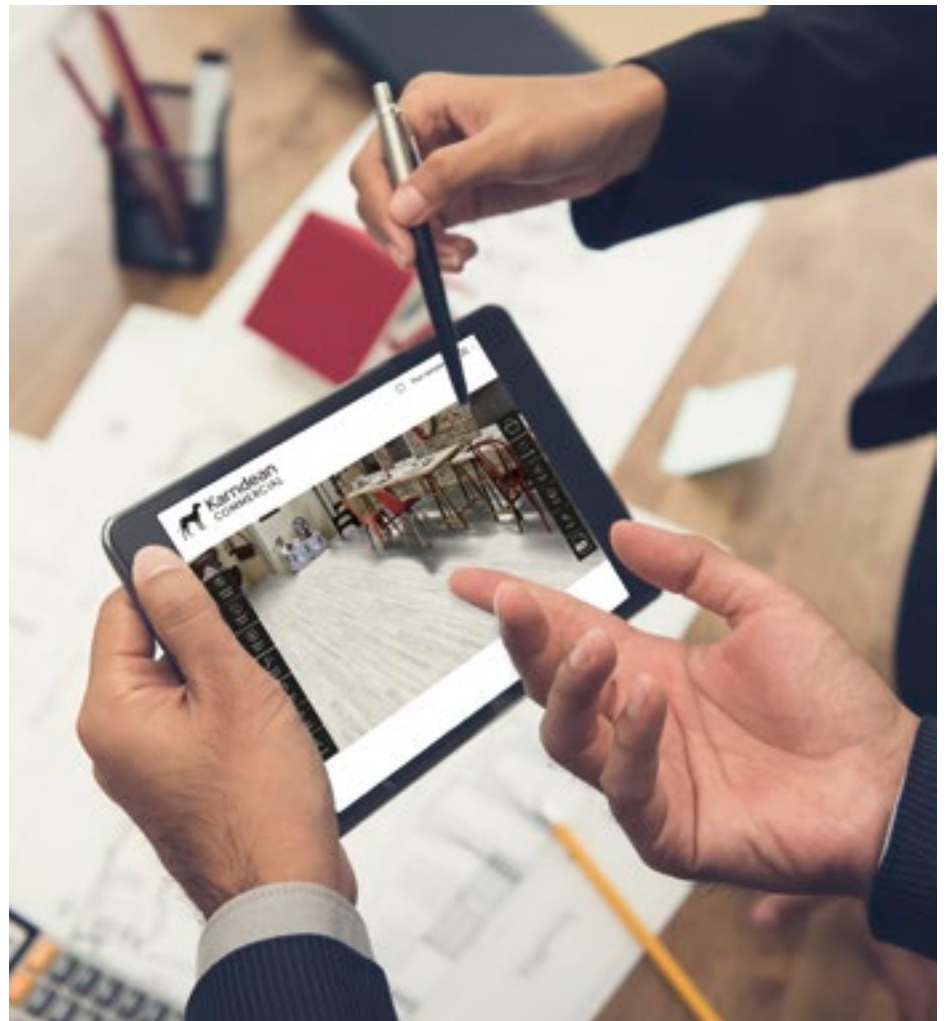

A PARTNER YOU CAN COUNT ON

Our stylish, durable LVT is just the start. We carry strong inventory at three regional facilities for faster fulfillment from coast to coast. And if you're in the area, all three facilities have showrooms where you can get a firsthand look at our products and take free full-sized samples.

Pittsburgh Showroom

1100 Pontiac Court
Bushy Run Corporate Park
Export, PA 15632

Fort Worth Showroom

14201 Sovereign Road
Suite 141
Fort Worth, TX 76155

Las Vegas Showroom

4230 North Fifth Street
Suite 100
North Las Vegas, NV 89030

Karndean Customer Service

8am – 8pm (EST) Monday – Friday
Call 888-266-4343, or email info@karndean.com.



FREE SAMPLES



































Just go to the product page at [karndeancommercial.com](https://www.karndeancommercial.com) and click the “Order Sample” box. If you’re interested in full-sized samples or our collection-specific architect folders, get in touch with your Karndean sales representative, or contact our customer service team.



product index
















Organized by wood, stone and abstract, you can find basic specs and info for every one of our designs – from product thickness and wear layer to the number of planks or tiles in a box.

Wood DESIGNS BY COLLECTION | GLUEDOWN

Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	EW01	Hickory Paprika	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	EW02	Hickory Peppercorn	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	EW03	Hickory Nutmeg	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	EW13	Classic Hickory	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	EW21	Reclaimed Chestnut	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL01	Spring Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL03	Autumn Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL07	Santina Cherry	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL13	Salon Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL21	Glacier Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL24	Dune Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL26	Basque Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL28	Serrano Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL30	Dove Artisan Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL32	Pale Artisan Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL33	Grey Artisan Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	56.0" x 9.0" (1422.4mm x 228.6mm)	10 planks / 35.0ft ²
	RL34	Canvas Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL35	Damask Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL36	Merino Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL37	Tweed Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL38	Cotton Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	RL39	Castle Hill Ash	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL41	Canterbury Ash	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL43	Fieldstone Ash	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL44	Golden Kent Ash	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL45	Belmont Hickory	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL48	Natural Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL49	Canadian Maple	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL50	Blended Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	RL51	Lorenzo Warm Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.50" (1219.2mm x 114.3mm)	24 planks / 36.0ft ²
	SM-RL13	Salon Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.50" (457.2mm x 76.2mm)	40 planks / 35.0ft ²
	SM-RL21-28	Glacier Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.50" (457.2mm x 76.2mm)	40 planks / 35.0ft ²
	SM-RL26	Basque Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.50" (457.2mm x 76.2mm)	40 planks / 35.0ft ²
	SM-RL28	Serrano Oak	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.50" (457.2mm x 76.2mm)	40 planks / 35.0ft ²

Wood DESIGNS BY COLLECTION | GLUEDOWN








Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	VGW39T	Antique Karri	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW41T	Merbau	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW42T	Jatoba	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW44T	Lancewood	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW49T	Rimu	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW53T	Wellington Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW70T	Smoked Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW76T	Vintage Pine	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW81T	Country Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW83T	Frosted Birch	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW85T	French Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW86T	Classic Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW89T	Ebony	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW91T	Tawny Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW93T	Hessian Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW94T	Honey Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW99T	Reclaimed Redwood	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW100T	Aged Redwood	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW115T	Natural Prime Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW136T	Blond Farmhouse Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW137T	Silver Farmhouse Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW138T	Smoked School Cedar	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW139T	Light Country Oak	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW142T	Natural School Cedar	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW143T	Ohana Koa	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²
	VGW144T	Auburn Spotted Gum	3.0mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 7.0" (1219.2mm x 177.8mm)	15 planks / 35.0ft ²

Opus	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	WP311	Grano	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP313	Ignea	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP316	Rubra	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP318	Carbo	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP321	Luteus	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP322	Canilia	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP325	Arrado	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP326	Natural Walnut	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP328	Washed Walnut	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP329	Bleached Grey Walnut	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP330	Tenebra Walnut	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP331	Textum	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	WP411	Niveus	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 9.0" (1219.2mm x 228.6mm)	12 planks / 36.0ft ²
	WP413	Magna	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 9.0" (1219.2mm x 228.6mm)	12 planks / 36.0ft ²
	WP414	Argen	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 9.0" (1219.2mm x 228.6mm)	12 planks / 36.0ft ²
	WP415	Ordo	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	48.0" x 9.0" (1219.2mm x 228.6mm)	12 planks / 36.0ft ²
	WP511	Weathered Elm	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	36.0" x 4.0" (914.4mm x 101.6mm)	36 planks / 36.0ft ²


































Wood DESIGNS BY COLLECTION | GLUEDOWN

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	CH-KP94	Pale Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	48.0" x 9.0" (1219.2mm x 228.6mm)	12 Planks / 36.0ft ²
	CH-KP96	Mid Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	48.0" x 9.0" (1219.2mm x 228.6mm)	12 Planks / 36.0ft ²
	KP94	Pale Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP96	Mid Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP97	Classic Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP98	Aged Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP99	Lime Washed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP105	White Painted Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP133	Natural Scandi Pine	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP138	Grey Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP141	Urban Spotted Gum	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP144	Washed Character Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP145	Natural Character Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP150	Shadow Studio Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP154	Dutch Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²
	KP155	Honey Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.9)	36.0" x 6.0" (914.4mm x 152.4mm)	24 planks / 36.0ft ²

Wood DESIGNS BY COLLECTION | LOOSE LAY

Karndean LooseLay	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	LLP39	Antique Karri	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP92	Country Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP94	Newport	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP95	Ashland	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP109	Stamford	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP111	Boston	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP112	Hartford	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP113	Cambridge	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP149	Palmaria	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP154	Danbury	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP157	Bridgeport	4.5mm	20mil/0.5mm	No	Dry 0.92	41.34" x 9.84" (1050.0mm x 250.0mm)	12 planks / 33.9ft ²
	LLP301	Twilight Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP303	Antique Heart Pine	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP304	Weathered Heart Pine	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP305	Reclaimed Heart Pine	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP306	Pearl Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP307	Neutral Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP308	French Grey Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP309	Taupe Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP310	Champagne Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP315	Character Walnut	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP317	Lemon Spotted Gum	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP330	Worn Fabric Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP352	Alpine Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP353	Cashmere Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP354	Sterling Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP355	Wheat Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP356	Field Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP357	Pure Danish Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP358	Nude Danish Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP359	Golden Danish Oak	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP360	Shorebird Ash	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²
	LLP361	Swan Bay Ash	4.5mm	20mil/0.5mm	No	Dry 0.92	59.06" x 9.84" (1500.0mm x 250.0mm)	8 planks / 32.29ft ²

Wood DESIGNS BY COLLECTION | RIGID CORE




























Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	AKP-EW01	Hickory Paprika	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	36.0" x 5.91" (914.4mm x 150.0mm)	16 Planks / 23.62ft ²
	AKP-EW02	Hickory Peppercorn	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	36.0" x 5.91" (914.4mm x 150.0mm)	16 Planks / 23.62ft ²
	AKP-EW03	Hickory Nutmeg	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	36.0" x 5.91" (914.4mm x 150.0mm)	16 Planks / 23.62ft ²
	AKP-EW13	Classic Hickory	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-EW21	Reclaimed Chestnut	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL01	Spring Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL03	Autumn Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL07	Santina Cherry	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL13	Salon Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL21	Glacier Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL24	Dune Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL26	Basque Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL28	Serrano Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL30	Dove Artisan Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL32	Pale Artisan Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL33	Grey Artisan Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	55.91" x 8.86" (1420.0mm x 225.0mm)	8 planks / 27.51ft ²
	AKP-RL34	Canvas Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL35	Damask Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL36	Merino Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL37	Tweed Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL38	Cotton Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	AKP-RL39	Castle Hill Ash	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL41	Canterbury Ash	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL43	Fieldstone Ash	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL44	Golden Kent Ash	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL45	Belmont Hickory	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL48	Natural Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL49	Canadian Maple	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL50	Blended Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-RL51	Lorenzo Warm Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	48.0" x 4.25" (1219.2mm x 107.95mm)	18 planks / 25.50ft ²
	AKP-SM-RL13	Salon Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.25" (711.2mm x 107.95mm)	30 planks / 24.79ft ²
	AKP-SM-RL21-28	Glacier Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.25" (711.2mm x 107.95mm)	30 planks / 24.79ft ²
	AKP-SM-RL26	Basque Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.25" (711.2mm x 107.95mm)	30 planks / 24.79ft ²
	AKP-SM-RL28	Serrano Oak	7.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	28.0" x 4.25" (711.2mm x 107.95mm)	30 planks / 24.79ft ²













Wood DESIGNS BY COLLECTION | RIGID CORE

Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	Size	Box quantity
	SCB39	Antique Karri	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB41	Merbau	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB42	Jatoba	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB44	Lancewood	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB49	Rimu	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB53	Wellington Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB70	Smoked Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB76	Vintage Pine	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB81	Country Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB83	Frosted Birch	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB85	French Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB86	Classic Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB89	Ebony	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB91	Tawny Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB93	Hessian Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB94	Honey Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB99	Reclaimed Redwood	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB100	Aged Redwood	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB115	Natural Prime Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB136	Blond Farmhouse Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB137	Silver Farmhouse Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB138	Smoked School Cedar	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB139	Light Country Oak	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB142	Natural School Cedar	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB143	Ohana Koa	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²
	SCB144	Auburn Spotted Gum	4.5mm	20mil/0.5mm	Micro	Pass (Dry 0.8)	48.03" x 7.09" (1220.0mm x 180.0mm)	10 planks / 23.64ft ²

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	SCB-CH-KP94	Pale Limed Oak	4.5mm	12mil/0.3mm	No	Pass (Dry 0.64)	48.03" x 8.86" (1220.0mm x 225.0mm)	10 Planks / 29.55ft ²
	SCB-CH-KP96	Mid Limed Oak	4.5mm	12mil/0.3mm	No	Pass (Dry 0.64)	48.03" x 8.86" (1220.0mm x 225.0mm)	10 Planks / 29.55ft ²
	SCB-KP94-6	Pale Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KP96-6	Mid Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KP97-6	Classic Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KP98-6	Aged Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KP99-6	Lime Washed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI05-6	White Painted Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI33-6	Natural Scandi Pine	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI38-6	Grey Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI41-6	Urban Spotted Gum	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI44-6	Washed Character Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI45-6	Natural Character Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI50-6	Shadow Studio Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI54-6	Dutch Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²
	SCB-KPI55-6	Honey Limed Oak	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	36.0" x 5.91" (914.4mm x 150.0mm)	20 planks / 29.53ft ²

Wood DESIGNS BY COLLECTION | RIGID CORE

Korlok Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	RKP8101	Baltic Washed Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8102	Washed Velvet Ash	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8103	Warm Ash	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8104	Washed Grey Ash	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8105	Texas White Ash	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8107	Smoked Butternut	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8108	Washed Butternut	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8109	Reclaimed French Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8110	Antique French Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8111	Baltic Limed Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8114	Cathedral Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8116	Canadian Urban Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8122	Natural Koa	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8124	Kilauea Koa	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8126	Smoked Koa	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8202	Oyster Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8203	Shadow Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8206	Barley Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8209	Salvaged Barnwood	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8215	Warm Brushed Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8217	Ivory Brushed Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8236	Baltic Coastal Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8237	Glenmore Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	RKP8238	Braemar Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	55.91" x 8.86" (1420.0mm x 225.0mm)	10 planks / 34.39ft ²
	SM-RKP8105	Texas White Ash	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	23.46" x 5.87" (596.0mm x 149.0mm)	22 planks / 21.03ft ²
	SM-RKP8116	Canadian Urban Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	23.46" x 5.87" (596.0mm x 149.0mm)	22 planks / 21.03ft ²
	SM-RKP8209	Salvaged Barnwood	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	23.46" x 5.87" (596.0mm x 149.0mm)	22 planks / 21.03ft ²

Korlok Reserve	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	RCP6531	Vintage Oregon Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6532	Weathered Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6533	North American Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6534	Limed Coastal Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6535	Aged Spanish Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6536	Natural Oiled Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6539	Charred Weathered Pine	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6541	Grey Oiled Oak	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6543	Marron Elm	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6544	Ghost Elm	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6545	Smoked American Maple	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²
	RCP6546	Millstone Sycamore	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	48.03" x 7.05" (1220.0mm x 179.0mm)	10 planks / 23.51ft ²

Stone DESIGNS BY COLLECTION | GLUEDOWN

Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	LM30	Ionic Marble	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	LM31	Corinthian Marble	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	LM32	Doric Marble	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	LM33	Calacatta d'Oro	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM35	Pearl Onyx	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM36	Rose Onyx	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM37	Silk Travertino	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM38	Champagne Travertino	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM39	Caliza Classico	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM40	Pavimento Crema	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM42	Pavimento Bianco	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM43	Brezza Ceppo	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM44	Sabbia Ceppo	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM45	Naturale Ceppo	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	LM49	Lago Quartzite	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	LM50	Alpine Quartzite	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	LM51	Sterling Quartzite	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²

Opus	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	SM-SP216	Fumo	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	3.0" x 18.0" (76.2mm x 457.2mm)	96 planks / 36.0ft ²
	SP115	Nero	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	SP212	Terra	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	SP213	Urbus	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	SP216	Fumo	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	SP218	Lutum	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	SP714	Clarus	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP731	Stratus	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP732	Umbra	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	Size	Box quantity
	ST5-18	Soapstone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST12	Bath Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST13	Portland Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST14	Cumbrian Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST16	Grey Riven Slate	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST17	Honed Oyster Slate	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST18	Ivory Riven Slate	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST24	Olten Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST30	Bern Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²
	ST31	River Marble	2.0mm	12mil/0.3mm	No	Pass (Dry 0.91)	12.0" x 18.0" (304.8mm x 457.2mm)	24 tiles / 36.0ft ²

Stone DESIGNS BY COLLECTION | LOOSE LAY











Karndean Loose Lay	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	LLT200	Arizona	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT201	Colorado	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT202	Indiana	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT206	Georgia	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT209	Capri	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT211	Vulcano	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT212	Dakota	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT214	Seattle	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT217	Vermont	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²
	LLT218	Ontario	4.5mm	20mil/0.5mm	No	Dry 0.92	19.69" x 24.02" (500.0mm x 610.0mm)	10 tiles / 32.83ft ²

Stone DESIGNS BY COLLECTION | RIGID CORE

Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	AKT-LM30	Ionic Marble	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 18.0" (457.2mm x 457.2mm)	10 tiles / 22.50ft ²
	AKT-LM31	Corinthian Marble	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 18.0" (457.2mm x 457.2mm)	10 tiles / 22.50ft ²
	AKT-LM32	Doric Marble	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 18.0" (457.2mm x 457.2mm)	10 tiles / 22.50ft ²
	AKT-LM33	Calacatta d'Oro	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM35	Pearl Onyx	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM36	Rose Onyx	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM37	Silk Travertino	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM38	Champagne Travertino	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM39	Caliza Classico	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM40	Pavimento Crema	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM42	Pavimento Bianco	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM43	Brezza Ceppo	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM44	Sabbia Ceppo	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM45	Naturale Ceppo	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	18.0" x 36.0" (457.2mm x 914.4mm)	6 tiles / 27.0ft ²
	AKT-LM49	Lago Quartzite	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	17.99" x 23.62" (457.0mm x 600.0mm)	8 tiles / 23.61ft ²
	AKT-LM50	Alpine Quartzite	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	17.99" x 23.62" (457.0mm x 600.0mm)	8 tiles / 23.61ft ²
	AKT-LM51	Sterling Quartzite	3.0mm	30 mil/0.7 mm	Standard	Pass (Dry 0.92)	17.99" x 23.62" (457.0mm x 600.0mm)	8 tiles / 23.61ft ²

Stone DESIGNS BY COLLECTION | RIGID CORE

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	Size	Box quantity
	SCB-ST5-G	Soapstone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST12-G	Bath Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST13-G	Portland Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST14-G	Cumbrian Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST16-G	Grey Riven Slate	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST17-G	Honed Oyster Slate	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST18-G	Ivory Riven Slate	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST24-G	Olten Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST30-G	Bern Stone	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²
	SCB-ST31-G	River Marble	2.0mm	12mil/0.3mm	No	Pass (Dry 0.64)	12.0" x 18.0" (304.8mm x 457.2mm)	20 tiles / 30.0ft ²

Korlok Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	RKT2407	Shadow Lace	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT2408	Alpine Lace	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3001-G	Volcanic Slate	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3002-G	Antique Copper	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3003-G	Mountain Slate	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3004-G	Coastal Fog	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3005-G	Arctic Mist	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3006-G	Black Sands	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3007-G	Metro Grey	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3008-G	Oxford Grey	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3009-G	Pebble Grey	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3010-G	Sandstorm	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3011-G	Aged Parchment	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3012-G	Palazzo Marble	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	RKT3013-G	Brunella Marble	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	17.99" x 23.62" (457.0 x 600.0mm)	10 tiles / 29.5ft ²
	SM-RKT3012-G	Palazzo Marble	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	5.87" x 23.46" (149.0mm x 596.0mm)	22 planks / 21.03ft ²
	SM-RKT3013-G	Brunella Marble	6.5mm	20mil/0.5mm	Micro	Pass (Dry >0.8)	5.87" x 23.46" (149.0mm x 596.0mm)	22 planks / 21.03ft ²

Abstract DESIGNS BY COLLECTION | GLUEDOWN

Heritage Collection	Code	Name	Thickness	Wear layer	Bevel	Products used	Size	Box quantity
	CLIF-01	Clifton	2.5mm	20mil/0.5mm	Standard	V19 V20 - - -	9.0" x 9.0" (228.6mm x 228.6mm)	32 tiles / 18.0ft ²
	CLIF-04	Clifton	2.5mm	20mil/0.5mm	Standard	V12 V19 V20 SPI15 -	9.0" x 9.0" (228.6mm x 228.6mm)	32 tiles / 18.0ft ²
	MAYF-01	Mayfair	2.5mm	20mil/0.5mm	Standard	V18 V12 V19 V20 SPI15	12.0" x 12.0" (304.8mm x 304.8mm)	16 tiles / 16.0ft ²
	MAYF-02	Mayfair	2.5mm	20mil/0.5mm	Standard	V15 V16 V12 V20 SPI15	12.0" x 12.0" (304.8mm x 304.8mm)	16 tiles / 16.0ft ²

Opus	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance ASTM D2047	Size	Box quantity
	SP116	Noale	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	SP117	Luca	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	SP118	Salute Grigio	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 18.0" (457.2mm x 457.2mm)	16 tiles / 36.0ft ²
	SP219	Casablanca	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	SP220	Marrakesh	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 24.0" (457.2mm x 609.6mm)	12 tiles / 36.0ft ²
	SP719	Burnt Sienna	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP720	Indigo	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP721	Amber	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP722	Zinc	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP723	Zinc	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP724	Chalk Grey	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP725	Chalk Grey	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP726	Yellow Ochre	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP727	Black Iron	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	6.0" x 36.0" (152.4mm x 914.4mm)	24 planks / 36.0ft ²
	SP728	Black Iron	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP729	San Marco	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP730	Leoncini	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP733	Albertina	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP734	Contarini	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²
	SP735	Tizina	2.5mm	20mil/0.5mm	Micro	Pass (Dry 0.89)	18.0" x 36.0" (457.2mm x 914.4mm)	8 tiles / 36.0ft ²



■ Mayfair MAYF-01



Karndean Designflooring
1100 Pontiac Court
Export, PA 15632
Phone: 888-266-4343
Email: info@karndean.com

karndeancommercial.com



Karndean
Designflooring