



Karndean
COMMERCIAL

Featuring
new Korlok
designs




Product Guide

Your complete guide to Karndean's
premium resilient LVT and hybrid vinyl flooring

Issue 13 | Australia | 02/25

Our LVT flooring ranges

Whatever it is you're after, you're sure to find a look that's right for you in our wide range of stylish, high quality Karndean floors.

	Price range		Size (mm)	Residential warranty	Commercial warranty	Thickness (mm)	Wear layer (mm)		Bevelled edge	Registered emboss	Quantity per box	M ² per box	M ² per pallet	Weight per box (kg)	
Loose lay 															
Karndean LooseLay Longboard	\$\$\$	Plank	1500.0 x 250.0	Lifetime	15 years	4.5	0.5		No	No	8	3.000	156.000	24	
Karndean LooseLay Originals	\$\$	Plank	1050.0 x 250.0						No	No	12	3.150	151.200	23	
		Tile	500.0 x 610.0						No	No	10	3.050	158.600	24	
Rigid core 															
Korlok	\$\$\$	Plank	1420.0 x 225.0	Lifetime	15 years	6.5	0.5		Micro	No	10	3.195	166.140	26	
		Tile	457.0 x 600.0						Micro	No	10	2.742	142.584	21	
			457.0 x 935.0						Micro	No	6	2.564	117.944	20	
Van Gogh	\$\$	Plank	1220.0 x 180.0	Lifetime	15 years	5.5	0.5		Micro	No	10	2.196	120.780	20	
Knight Tile	\$	Plank	1220.0 x 180.0	Lifetime	10 years	4.5	0.3		No	No	14	3.074	138.348	24	
		Tile	304.8 x 457.2						No	No	20	2.787	117.058	22	
Gluedown 															
Art Select	\$\$\$	Oak Royale	1219.2 x 177.8	Lifetime	20 years	3.0	0.7		Standard	No	15	3.252	195.120	19	
		Oak Premier	914.4 x 152.4					No		24	3.345	167.250	19		
		Handcrafted						Yes		24	3.345	167.250	19		
		Parquet	228.6 x 76.2					No		192	3.345	180.630	16		
Van Gogh	\$\$	Plank	1219.2 x 177.8	Lifetime	15 years	3.0	0.5		Micro	No	15	3.252	195.096	19	
Opus	\$\$	Plank	914.4 x 152.4	Lifetime	15 years	2.5	0.5		Micro	No	24	3.345	200.700	16	
			1219.2 x 228.6					12			214.080				
		Tile	457.2 x 457.2					16			200.700				
			457.2 x 609.6					12			214.080				
Knight Tile	\$	Plank	1219.2 x 177.8	Lifetime	10 years	2.0	0.3		No	No	20	4.335	260.129	16	
		Tile	304.8 x 457.2						No	No	24	3.345	240.805	12	

Karndean Designflooring

Who are we?

We are the leading global brand of luxury vinyl flooring. We're backed by decades of experience and a passionate founding family.

What do we do?

We create high quality, luxury vinyl flooring that's built to last.

Why do we do what we do?

Because we see flooring differently and we are dedicated to creating the finest, most innovative designs to authentically replicate natural woods and stones.

What do you get when you choose Karndean?

Premium service and a premium quality floor that is designed and guaranteed for life.

Contents

Our ranges	2
Design is an endless journey	6
Karndean Evolve™	8
The Karndean difference	10
Designed to perform	12
Your partner in success	14
Working together - your partner in success	16
Resources and inspiration	18
Cleaning and maintenance	20
Installation guides	22
Adhesive	24
Loose lay 	27
Loose lay LVT flooring	28
Karndean LooseLay Longboard	30
Karndean LooseLay Originals	40
Rigid core 	53
Rigid core LVT flooring	54
Kortok	56
Van Gogh	70
Knight Tile	78
Gluedown 	87
Gluedown LVT flooring	88
Art Select	90
Van Gogh	100
Opus	110
Knight Tile	120
Product index	130

Design is an endless journey

50+ years of simply beautiful floors

Inspiring trends

As industry leaders, we take pride in our ability to stay ahead of the curve by identifying and understanding interior design trends that shape our market. Our dedication to this ensures that our products not only align with the latest aesthetic preferences but also cater to the evolving needs of project & home owners, helping them create spaces that resonate with contemporary tastes.

Support

We understand the importance of reliable support, which is why we offer more than just exceptional products. Our dedicated Business Managers, Customer Service, and Technical Support teams are always available to provide assistance. With Australian based stock and a commitment to excellent service, we ensure that our partners have everything they need to succeed, from initial inquiries to after-sales support.

Design

Our design philosophy is rooted in the belief that nature offers the most expressive and intriguing forms. We seek out these natural inspirations to craft floor designs that are truly unique, offering a blend of beauty and originality. Each of our products reflects a commitment to creating floors that are as visually captivating as they are timeless.

Replication

We take pride in our meticulous attention to detail, ensuring that each of our floors authentically replicates the natural materials that inspire them. From the texture to the colour variation, every element is carefully crafted to tell a unique story. Our floors offer more than just a beautiful surface - they provide a narrative that adds depth and character to any space.

Performance

Our floors are designed not only to be aesthetically pleasing but also to meet the demands of everyday life. Engineered for durability, they offer long-lasting performance in a variety of environments, ensuring they remain beautiful and functional for years to come. Whether in a busy commercial setting or a tranquil residential space, our floors are built to withstand the test of time.



It's a new day

And we're ready to create a better tomorrow!

Its a promise to Evolve.

Karndean are proud recipients of the Best Vinyl Flooring Design Company – Australia in the 2024 BUILD Sustainability Building Awards. The award recognises innovators who are driving sustainability in the building and construction space.

karndeancommercial.com/evolve
karndean.com/evolve



Discover
Karndean
Evolve™

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.



Confront climate change

- We're actively reducing our carbon footprint through energy-efficient practices and renewable energy sources, aiming for a science-based target of at least a 42% reduction in greenhouse gas emissions by 2030.
- Karndean provides Environmental Product Declarations (EPDs) for all products (hosted by SCS Global Services), verified to ISO 14025 standards, offering clear insights into the environmental life cycle.
- GreenTag™ Excellence – Our gluedown, Korlok, LooseLay Originals, and Karndean LooseLay Longboard ranges receive a GreenRate Level 'A' rating for quality sustainable building materials. Additionally, we are the first Australian LVT supplier to achieve Best Environmental Practice PVC in 2015.



Health & wellbeing

We ensure the health and safety of those involved with the manufacturing and use of our products.

- Our products go beyond aesthetics; they are designed with wellbeing in mind. They are not only free from heavy metals and unsafe phthalates, but are also certified for post-installation indoor air quality. Our commitment to creating healthy interior environments extends to our choice of water-based or solvent-free adhesives, ensuring very low VOC emissions. Your health and comfort are integral to our product design.
- All our gluedown, Korlok, LooseLay Originals, and LooseLay Longboard ranges have a GreenRate™ LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, ensuring the wellbeing of workers, and maintaining environmentally friendly manufacturing processes.



Sustainable use of resources

- At the core of our dedication to responsible resource management lies our commitment to preserving natural resources. We achieve this by embracing recycled materials and creating products specifically designed for recyclability, thus reducing our dependence on raw materials derived from crude oil.
- We prioritise the incorporation of recycled materials in our products, with each one containing up to 50% recycled PVC in their backing layers, sourced from post-production waste.
- We substantiate our efforts to minimise landfill waste and foster recycling initiatives, strengthening our role in promoting a circular economy.



Inclusion & diversity

- We deeply value equity, inclusivity and diversity within our company and nurture these principles through engagement and education.
- These values guide our policies on environmental protection, responsible sourcing/trading, and our contributions to local and global communities, reflecting our founder's enduring principles and ethics that continue to shape our business's approach to operating responsibly.



Supply chain transparency

- We're committed to upholding high standards of environmental and social responsibility, ensuring fair treatment and safe working conditions for all.
- Our factories lead the way by using recycled materials and eco-friendly packaging, setting a new standard for environmental consciousness.
- Plus, our manufacturing processes are certified to meet ISO 14001 and ISO 9001 standards, guaranteeing top-notch quality and sustainability every step of the way.



Education

- We educate employees about the importance of sustainability, helping them understand what role they play, encouraging them to think sustainably and devise new ways of working, increasing the likelihood of achieving our goals.
- By conducting CPD classes and participating in speaking engagements with organisations like the Green Building Council of Australia, a membership we've held since 2007, we actively contribute to the training of professionals in the design, construction, and built industries.



The Karndean difference

We replicate nature's intricate details

Our floors showcase every intriguing detail of the natural materials that have inspired the design, each with a unique story to tell. Karndeans' extensive design program works from the ground up. Each and every plank we create replicates the intricate detail of the expressive and intriguing forms we find in the natural world.



Premium floors, backed for life

We're so confident in the performance of our floors, that we've backed them with our 35-year fully transferable lifetime residential warranty, and 10-20 years for any commercial premises. Rest assured in the knowledge that investing in a Karndean floor is an investment in a premium, durable, and guaranteed floor—and one that holds its value for property owners now and into the future.



We inspire trends

We are a design-oriented organisation, and we pride ourselves as industry leaders for identifying and understanding interior design trends that influence our market and consumer needs. Local photography, created in-house, showcases how beautifully created floors can transform any space, from a trendy northside terrace, a child-care centre, to an expansive hotel room foyer.



Premium customer experience

At Karndean we understand that happy and satisfied customers are great for your business. We know the value of a supplier who not only creates great-performing products but supports you every step of the way, to give your customers an outstanding experience from the very start of their journey through the lifetime of their floor.

We know LVT - it's what we do

We are a global manufacturer of LVT — it's our speciality, and we know it better than any company out there. No matter what the specifications of your project are, Karndean has an option to satisfy your desire for a beautiful, high-performance floor whilst meeting your budget needs. Formats, design aspects, colours, sizes, ratings and environmental considerations — we've got you covered.



Advocacy

We are a global manufacturer of Luxury Vinyl Tiles (LVT) with more than 50 years under our belt, and we care deeply about the future of our industry, and the environment. That's why we take an active role in the advocacy of LVT products, including a leadership role in the Australian Resilient Flooring Association (ARFA), and Resiloop, a specially formed group of LVT flooring brands investigating the opportunities and promotion of product stewardship schemes in the industry.





Designed to
perform

■ Pearl Oak LLP306



Realistic wood and stone designs

Inspired by nature, our products are designed in-house and realistically replicate the look and feel of natural wood and stone materials.



Easy to clean and look after

A sweep and mop with Karndeans Clean is all you need to keep your Karndeans floor looking great.



Durable

Compared to other flooring alternatives, Karndeans gives you the look and feel of natural materials but with the durability and resilience of luxury vinyl.



Hygienic

Unlike carpets, our floors don't hold dust, dirt, pollen or other allergens.



Comfortable underfoot

Our products are softer and warmer underfoot than natural wood and stone flooring.



Kid friendly

Karndeans floors offer children a safe and comfortable space to play, and parents a durable, easy-to-clean surface.



Resists indentation

All Karndeans floors stand up to the impact of day to day life.



Warranty*

Designed to give you peace of mind, every Karndeans floor is guaranteed to last for years to come.



Water resistant

Karndeans's waterproof^ floors stand up to spills of all sizes and won't swell, crack or warp when exposed to moisture.



K-Guard+®

We use K-Guard+® surface technology for scuff and stain resistance ensuring there is no need to apply an additional surface treatment following installation.



Compatible with underfloor heating

For added warmth, Karndeans is perfectly suitable for underfloor heating systems up to 27°C.



Quiet compared to other hard floors

Karndeans is quieter underfoot compared to most hard flooring alternatives.



Pet friendly

From muddy paw prints to household accidents and anything in-between, Karndeans's low-maintenance floors are designed with pets in mind.

* 35 years (lifetime) residential and up to 20 years commercial. See page 5 for details.

^Note: Rigid core is not suitable for wet areas like bathrooms. It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area.

Your partner in success

We are committed to providing a range of dedicated services and support to assist each and every project from start to finish.



Your partner in success

Retail & trade

At Karndean we understand the challenges you can face when it comes to promoting your business and getting ahead of the competition. That's why we arm you with a range of resources, advice, and referrals to give your business the edge:

Online

- A huge collection of images for use in your promotions, websites, and brochures.
- Consumer referrals sent right to your store via our website Find a Retailer search.
- Resources to help you educate your customers and guide them to the right flooring choice.
- A customer portal, giving you the ability to stock check, generate quotes, confirm orders, view cases and more... all at your fingertips.
- Assistance with jointly promoting your business through social media.

In person

- A dedicated Business Manager, on call to support your needs.
- In-store sales & product training.

In your store

- Extensive marketing collateral, swatch books and brochures to support your sales consultations.
- Progressive range updates and new designs to keep your product offering looking fresh and on-trend.
- A suite of point-of-sale units, to suit all spaces.
- Assistance and development of your in-store marketing, signage, and advertising.
- Comprehensive training modules delivered to empower and support knowledge & skills

At Karndean

- A customer service team, ready to take your call.
- A dedicated technical support team, on hand and prepared with the knowledge and experience to service your technical questions, both during the sales process and after installation.
- A huge Melbourne showroom with expert design consultants, open 6 days a week.



Architecture, design, & the building industry

When you specify a Karndean floor, you can be assured that you are working with the leading experts in luxury vinyl flooring. Our priority is to deliver beautiful floors that are fit-for-purpose in any environment and are long lasting.



Support & guidance

Our nationwide team of Commercial Business Managers are on hand to help with your project needs and can provide advice on format, design, colour selection, and installation advice as well as providing product specifications and certifications.

A partner you can trust, on a scale you need

We know that speed, reliability and efficiency of product delivery is critical to your project. Our multi-state team can support your multi-state structure, and we have the logistical and financial capability and proven track record of delivering large scale projects year on year.

Professional education in LVT

We offer accredited CPD sessions on the features and technical details of Luxury Vinyl Tile, arming them with knowledge about the suitability of formats and the advantages of specifying LVT over other flooring options.

Environmental credentials

As you'd expect from a leader in commercial flooring, every stylish, safe, durable Karndean product has Global GreenTag certifications and EPD associated with it. That's one less detail to worry about as you strive to incorporate best environmental practices in your next project.


All the tools you need:

- BIMstore
- Technical data sheets
- Environmental visualisation tools
- Installation guides
- Cleaning & maintenance guides
- Acoustic brochures
- Free samples
- Performance and test results
- Environmental & sustainability information


Resources and inspiration

Floorstyle

What better way to demonstrate the transformative effects of a Karndean floor than to visualise it in the customer's own space?



Residential



Commercial



- Use our pre-loaded images or upload photos of your own rooms.
- A valuable tool to help your customers establish a direction they would like to take concerning tone, colour, wood or stone, and even testing different laying patterns.
- Add a request for a free sample directly from the visualiser.
- Transfer your chosen floor into your CAD or 3D modelling program.



Sample swatch

A room has many visual elements that all interact with each other to create a sense of space. Our sample service puts the floor right in your customer's hands, enabling them to test and compare the designs, and create mood boards to complete their interior design project.

Social media - sharing great outcomes

Consumers are proud of their new Karndean floor and often share their own images on social media. This is a wonderful opportunity to promote your business in conjunction with Karndean to reinforce the care and professionalism you have provided them to achieve amazing installations. And of course, provide a thank-you for their business. Talk with your Karndean Business Manager.



Karndean brochures

Our extensive suite of brochures are created to inspire and educate. An ideal take-home, each brochure talks through the key benefits of a Karndean floor, supported by large, beautiful room-shot images.

Our brochures can help you guide your customers with:

- Why a premium quality floor is a great investment.
- Addressing uncertainty around format choices.
- What different laying patterns look like.
- The floor as a design element.
- Technical, warranty, and floor care questions.



Interior trends

Karndean presents the vanguard of interior design trends, in curated collections of imagery, colour palettes and styling, to ignite your imagination and inspire your clients.

Case studies

We are continuously updating our library of case studies with a strong focus on product format that is fit for purpose, providing you with a multitude of real-life examples of successful commercial installations.

Warranty - domestic and commercial

Send your customers our lifetime warranty information. Our all-new Warranty brochure is available as a physical hand-out, or a digital file to attach to your email confirmation.

The brochure outlines in an easy-to-read format the details of the warranty, caring for your floor, maintenance and troubleshooting.

Our Warranty is designed to safeguard your customer's purchase against manufacturing faults and defects.

Technical data sheets

You'll find all the essential technical specifications and ratings for each range in our easy reference TDS sheets. One page to cover all your specification requirements. Look for them on our website and in this catalogue in the range pages.



Cleaning and maintenance

Karndean's flooring is built to handle the everyday challenges of life, and with just a little care, it can continue looking as good as new.

All Karndean products are equipped with our advanced K-Guard+® surface protection system. This PU technology ensures a hygienic, durable finish that guards against daily wear, spills, and scuffs.

Making cleaning and maintenance simpler giving your customers the confidence that their Karndean floor will stay beautiful for years to come.


Inside the floor care kit

- | | |
|-----------------------------------|------------------------------------|
| 1 Karndean Clean 750 ml | 6 Remove Pad (coarse/white) |
| 2 Karndean Remove 750 ml | 7 Applicator |
| 3 Karndean Refresh 750 ml | 8 Floor Care Guide |
| 4 Floor Protector Pack | |
| 5 Refresh Pad (soft/white) | |




Cleaning products

Product name and code	Product name and code
 <p>Floor Care Kit SKU - FCCSM SINGLE</p>	 <p>Karndean Remove SKU - FCDGFST2 5 x 2 litres Coverage: 5 x 100m²</p>
 <p>Karndean Clean SKU - FCDGRCL750 6 x 750ml Coverage: 6 x 150m²</p>	 <p>Karndean Commercial Remove SKU - FCDGFST5 5 litres Coverage: 250m²</p>
 <p>Karndean Clean SKU - FCDGRCL2 5 x 2 litres Coverage: 5 x 500m²</p>	 <p>Karndean Refresh SKU - FCRFP750 6 x 750ml Coverage: 6 x 18m²</p>
 <p>Karndean Commercial Clean SKU - FCDGRCL5 5 litres Coverage: 1250m²</p>	 <p>Karndean Refresh SKU - FCRFP2 5 x 2 litres Coverage: 5 x 50m²</p>
 <p>Karndean Remove SKU - FCDGFST750 6 x 750ml Coverage: 6 x 37m²</p>	 <p>Karndean Commercial Refresh SKU - FCRHFP5 5 litres Coverage: 90m²</p>



Consumer aftercare brochure
Make the right start with cleaning and care guides.



A&D aftercare brochure
Maintain your projects with our commercial cleaning guide.

Installation guides

All installation guides are available on our website. Please scan the QR code to view them online.

- Installation guide Loose lay
- Installation guide Gluedown
- Rigid core hybrid with 2G™ fold down installation system
- Rigid core hybrid with 5G® fold down installation system

Compliance with Standards: The guidelines are aligned with the current AS/NZS 1884 Floor Coverings – Resilient Sheet & Tiles.

Pre installation and prep

With proper subfloor preparation and installation practices, your Karndean flooring installation will achieve a flawless finish and lasting durability, enhancing your project's overall quality.

Installation and preparation must comply with the current and applicable national standards and building codes for the installation of resilient flooring at the time of installation and be carried out in strict accordance with the relevant Karndean installation guidelines.

Prior to any installation, it is important to check that the subfloor is sound, level, plane, smooth, dry, clean, and free from contaminants, adhesive residues, dust and debris.


Acclimatisation is vital in order for the product to adjust to the environment it will be installed in, helping to prevent issues like warping or gaps due to temperature variations.

Please refer to our comprehensive installation guides and current AS/NZS 1884 standards for more information.


Karndean LVT flooring is suitable for installing over underfloor heating systems, provided they have been insulated so that the surface temperature does not exceed 27°C. Contact Karndean Technical Services for further information.



Commercial



Residential

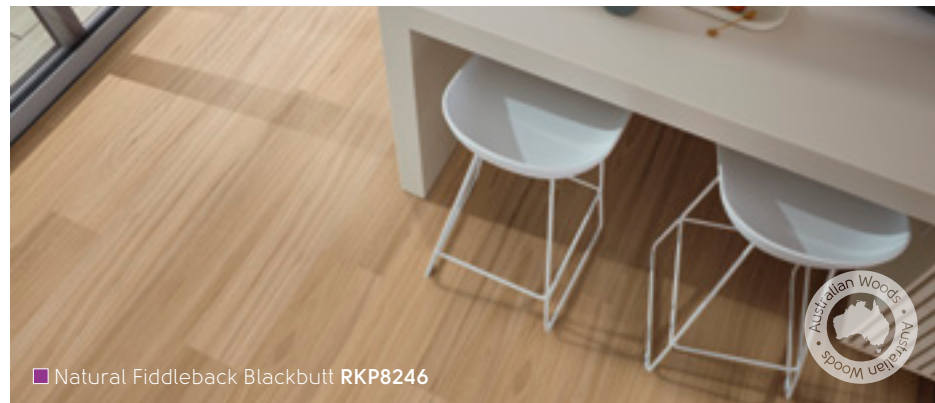

■ Natural Fiddleback Blackbutt RKP8246



□ Utah LLT216
Pietra

Adhesive

Product name and code



Mega-Bond
SKU - 15MEGA
15 Litre
Coverage: 60-75m²

Mega-Bond
SKU - 10MEGA
10 Litre
Coverage: 40-50m²

Mega-Bond
SKU - 4MEGA
4 Litre
Coverage: 16-20m²

Product name and code



Hi Tack Pressure Sensitive
SKU - 15TACK
15 Litre
Coverage: 60-75m²

Hi Tack Pressure Sensitive
SKU - 4TACK
4 Litre
Coverage: 16-20m²




Roberts R555 Two-Part
polyurethane adhesive
SKU - 5K800
5KG/4LT
Coverage: 15-20m²

	Karndean Mega-Bond	Karndean Hi-Tack PS	Roberts R555 Two-Part polyurethane adhesive
Compatible with gluedown	Yes	No	Yes
Compatible with loose lay	Yes	Yes	Yes
Compatible with rigid core	No	No	No
Shear strength	High	Low	Extreme
Peel strength	High	Low	Extreme
Application method	VI notched trowel*	VI notched trowel*	VI notched trowel*
Installation method	Lay product into wet adhesive*	Lay product once adhesive has dried clear (tacky)*	Lay product into wet adhesive*
Working time	Short	Long	Short
Suitable for use with underfloor heating to 27°C	High	Low	Very high
Suitable for rooms with high temperature fluctuations	High	Low	Very high
Topical moisture resistance	Medium	Medium	Very high
Suitability for concrete with high moisture content (RH)	85% RH	95% RH*	85% RH
Ease of removal of a single plank or tile for repair	Medium	Very good	Low
Resilooop Recycling Scheme	No	Compatible**	No

* Refer to TDS for more information.
**When installed on suitable substrates.



Environmentally Friendly
✓ VOC Compliant ✓ Low Odour
✓ Non-Solvent



A&D adhesives
Discover our range of high-performance adhesives

Mega-Bond and Hi-Tack only

All Karndean range and format credentials are at our certification policy level – please check for the current certification status.



□ Honey Ironbark LLP325
Australian Species



Loose lay



This innovative flooring offers the design versatility of gluedown LVT with the ease of a floating floor installation. Loose lay can be cut and laid to create a stylish aesthetic or for functional zoning purpose, making it ideal for both residential and commercial projects.



Wheat Oak **LLP355**
White Oak



4.5mm LVT,
extra long
wood planks



4.5mm LVT,
wood & stone

Loose lay LVT flooring

This innovative flooring offers the design versatility of gluedown LVT with just as much ease of a floating floor installation. Achieve stunning, custom designs, making it ideal for both residential and commercial projects.

Loose lay combines the convenience of design freedom of gluedown options, allowing for precise cuts to create stylish looks or functional zones. At 4.5mm thick, it transitions seamlessly to most carpet tiles. The advanced stability layer also ensures superior dimensional stability, reducing expansion and contraction. Save on moisture mitigation costs by installing Karndean LVT planks and tiles, suitable for up to 95% (adhesive dependant).

Features and benefits



Individually replaceable planks

Individual tiles and planks can be replaced without the need to disrupt the entire space.



Quick & easy to install

Our loose lay format allows you to lay the floor quickly and efficiently, with options for either hard setting or using a light tackifier adhesive.



K-Wave® friction grip backing

Due to the innovative K-Wave® friction grip backing, Karndean loose lay products can be laid directly over most existing, level, smooth hard floors with minimal subfloor preparation.



Reduces noise transfer

Your flooring selection can have a positive impact on the levels of sound travelling through a building. Choose our loose lay floor to reduce noise transfer across levels by up to 14dB and improve the living experience in a residential setting or the atmosphere of a high traffic public space.



Laying possibilities


As with our gluedown format, loose lay allows it to be laid in various laying patterns helping to create unique and engaging floors designs for consumers.



Extra long planks

The longer 1.5m long format reflect the expansive Australian landscape and imbue this sense of open space into our unique design sensibilities.

Premium loose lay construction

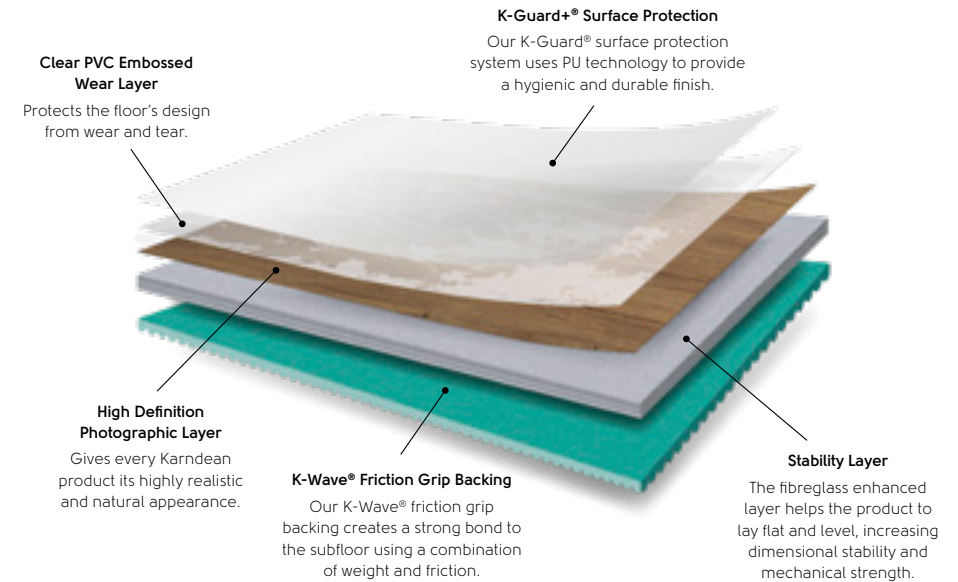

*Before this product may be installed, all subfloors should be solid and sound, smooth and level, clean and swept free of all debris. Please refer to the installation instructions.

Range Hub


LooseLay Longboard




Karndean LooseLay Longboard offers a stunning collection of timber-inspired designs, featuring both Australian and international wood species. Our Australian range includes the rich tones of Spotted Gum, the light elegance of Blackbutt, the versatile charm of Tasmanian Oak, and the deep character of Ironbark. For a touch of global luxury, we present European and American classics like European Oak, Danish Oak, and White Oak, celebrated for their timeless appeal. Together, these designs blend sophistication, durability, and natural beauty, perfect for enhancing any interior space.

Key facts			
Thickness:	4.5mm	Wear layer:	0.5mm
Plank size:	1500.0mm x 250.0mm (59.06" x 9.84")	Box quantity:	3.00m ² / 8 planks
Bevel:	No	Slip rating:	R10

Residential & Trade Centre



Consumer brochures
Access our online brochures and take a deep dive into the LooseLay Longboard range.



Floorstyle visualiser tool
Visualise Karndean vinyl planks in your own rooms.




Explore the range online
View the full range of LooseLay Longboard products on our website.

Commercial Centre



BIM Store objects
Render a LooseLay Longboard floor into your project.




Commercial Floorstyle visualiser tool
Visualise Karndean LVT flooring in your project.



Explore the range online
View the full range of LooseLay Longboard products on our website.

Wood	Product code	Name	Species	Australian woods	High variation
	LLP301	Twilight Oak	European Oak		
	LLP306	Pearl Oak	European Oak		
	LLP307	Neutral Oak	European Oak		
	LLP308	French Grey Oak	European Oak		
	LLP310	Champagne Oak	European Oak		
	LLP311	Bleached Tasmanian Oak	Australian Species	•	
	LLP312	Tasmanian Oak	Australian Species	•	
	LLP313	North Coast Blackbutt	Australian Species	•	
	LLP314	Embered Blackbutt	Australian Species	•	
	LLP316	Mountain Spotted Gum	Australian Species	•	•
	LLP317	Lemon Spotted Gum	Australian Species	•	•
	LLP325	Honey Ironbark	Australian Species	•	
	LLP328	Blended Ironbark	Australian Species	•	
	LLP329	Pure Fabric Oak	Character Oak		•
	LLP352	Alpine Oak	White Oak		
	LLP353	Cashmere Oak	White Oak		
	LLP354	Sterling Oak	White Oak		
	LLP355	Wheat Oak	White Oak		•
	LLP356	Field Oak	European Oak		
	LLP357	Pure Danish Oak	Danish Oak		

It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area.

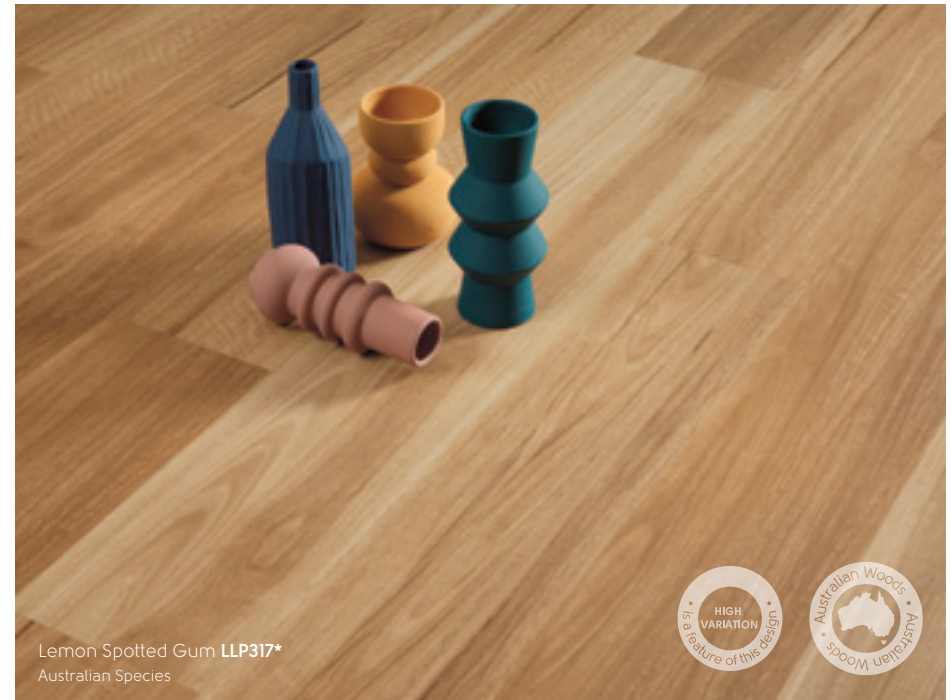


Lemon Spotted Gum LLP317*
Australian Species




* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.




Residential & Trade Centre



Warranty brochure
Discover comprehensive warranty protection for your customer's home.




Loose lay installation guide
Make the right start with our installation guide.




Acoustic performance
Explore flooring designed for quieter spaces.


Commercial Centre



Environmental Product Declaration
Independently verified EPDs. View, download & compare LCAs.



A&D warranty
Find out why our commercial warranty stand out from the rest.



Technical resources
View product, technical and performance information and tools.

Environmental accreditations

The LooseLay Longboard range receives a GreenRate™ Level 'A' rating for quality sustainable building material, and LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, and maintaining environmentally friendly manufacturing processes.



All Karndean range and format credentials are at our certification policy level – please check for the current certification status.

	Standard	Result
Surface treatment		K-Guard+® PU coating
Backing		PVC Friction Pad
Warranty¹	Commercial Domestic	15 years wear Lifetime wear
Bevelled edge		No
Standards	ASTM F1700	Pass
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	AS / NZS ISO 9239.1:2003	CRF: 8.3 kW/m ² Smoke value: 143% min.
Staining resistance	EN ISO 26987 / EN 423 ASTM F925	Excellent Pass
Light fastness	ISO 105-B02 ASTM F1515	Pass (≥7) Pass (<8)
Abrasion resistance	EN649 ISO 10582 ASTM D3884	Group T Type 1 Pass
Flexibility	ISO 24344	Pass
Dimensional stability	EN 434 / ISO 23999 ASTM F2199	Pass (≤0.10%) Pass
Acoustic impact noise reduction	ISO 140-8 Improved Impact Sound Insulation ASTM E492-09 Impact Insulation Class	ΔL _w = 14 dB IIC 56 dB
		Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay under certain build specifications – precise details available from Karndean. NCC 2016 F5.3 (a) result refers to Karndean INSUL Marshall Day Software report for your MULTI Res specification including AAAC Star rating.
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Indentation - residual	EN 433 / ISO 24343-1 ASTM F1914	Pass (≤0.1 mm) Pass (<8%)
Castor chair continuous use	EN 425 / ISO 4918	Pass
Thermal resistance	ISO 8302	0.0245 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance²	AS / NZS 4586:2013	R10
Adhesive	Karndean Hi-Tack PS Adhesive when applicable; please refer to our installation instructions.	
Environmental	GBCA / NZGBC GreenStar Rating System Floorscore SCS-EC10.3-2014 v4.0	GreenTag Level 'A'; LCA Silver Plus; Best Practice PVC Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification). Sustainability Assessment for Resilient Floor Coverings; Silver certified product. Manufactured to quality and environment management systems standards.
	Indoor Air Comfort Environmental Product Declaration	
	NSF / ANSI 332	
	ISO 14001 / ISO 9001	
Recycling		Suitable
Phthalate free		Yes

¹ Subject to terms.

² Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

All Karndean range and format credentials are at our certification policy level – please check for the current certification status

LooseLay Longboard Wood

1500.0mm x 250.0mm (59.06" x 9.84")



Alpine Oak **LLP352**

White Oak



Cashmere Oak **LLP353**

White Oak



Bleached Tasmanian Oak **LLP311**

Australian Species



Pearl Oak **LLP306**

European Oak



Pure Fabric Oak **LLP329***

Character Oak



Sterling Oak **LLP354**

White Oak



French Grey Oak **LLP308**

European Oak



Twilight Oak **LLP301**

European Oak

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

LooseLay Longboard Wood

1500.0mm x 250.0mm (59.06" x 9.84")



Blended Ironbark **LLP328**

Australian Species



Neutral Oak **LLP307**

European Oak



Pure Danish Oak **LLP357**

Danish Oak



Wheat Oak **LLP355***

White Oak



Field Oak **LLP356**

European Oak



Champagne Oak **LLP310**

European Oak



North Coast Blackbutt **LLP313**

Australian Species



Lemon Spotted Gum **LLP317***

Australian Species

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

LooseLay Longboard Wood

1500.0mm x 250.0mm (59.06" x 9.84")



Honey Ironbark **LLP325** Australian Species



Tasmanian Oak **LLP312** Australian Species



Mountain Spotted Gum **LLP316*** Australian Species



Embered Blackbutt **LLP314** Australian Species



Honey Ironbark **LLP325**
Australian Species



Alpine Oak **LLP352**
European Oak

*Please note: as a feature of the design, these products incorporate a high colour variation between individual planks



Pure Danish Oak **LLP357**
Danish Oak



Pearl Oak **LLP306**
European Oak

Range Hub

LooseLay Originals




Karndean LooseLay Originals collection draws inspiration from popular wood and stone species found in nature. The wood designs capture the natural beauty of European Oak, the rustic charm of distressed Rustic Oak, and the contemporary appeal of Limed Oak, offering options for any interior style. The stone designs replicate the look of natural materials, featuring minimalistic Concrete, luxurious Honed Limestone, and natural Pietra, all in a versatile, on-trend colour palette. This collection combines the elegance of nature with the comfort and benefits of luxury vinyl tiles.

Key facts


Thickness:	4.5mm	Bevel:	No
Plank size:	1050.0mm x 250.0mm (41.34" x 9.84")	Wear layer:	0.5mm
Tile sizes:	500.0mm x 610.0mm (19.69" x 24.02")	Box quantity:	3.150m ² / 12 planks 3.050m ² / 10 tiles
		Slip rating:	R10 planks / R9 tiles

Residential & Trade Centre



Consumer brochures

Access our online brochures and take a deep dive into the LooseLay Originals range.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Explore the range online


View the full range of LooseLay Originals products on our website.

Commercial Centre



BIM Store objects

Render a LooseLay Originals floor into your project.



Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.



Explore the range online

View the full range of LooseLay Originals products on our website.

Wood	Product code	Name	Species	High variation
	LLP92	Country Oak	Character Oak	
	LLP95	Ashland	White Oak	
	LLP102	Heritage Oak	Rustic Oak	
	LLP105	Vintage Timber	Rustic Oak	
	LLP108	Providence	White Oak	
	LLP109	Stamford	Rustic Oak	•
	LLP112	Hartford	Rustic Oak	•
	LLP113	Cambridge	Rustic Oak	
	LLP142	Sicilia	Character Oak	
	LLP146	Budelli	Limed Oak	
	LLP147	Lampione	European Oak	
	LLP148	Linosa	European Oak	
	LLP150	Levanzo	Limed Oak	
	LLP152	Waterbury	Limed Oak	
	LLP153	Brockton	European Oak	
	LLP154	Danbury	European Oak	
	LLP156	Hamden	Character Oak	
	LLP157	Bridgeport	European Oak	


Stone	Product code	Name	Species	High variation
	LLT201	Colorado	Pietra	
	LLT203	Madison	Honed Limestone	
	LLT208	Tino	Honed Limestone	
	LLT209	Capri	Honed Limestone	
	LLT210	Nisida	Concrete	
	LLT211	Vulcano	Concrete	
	LLT212	Dakota	Concrete	
	LLT213	Maine	Concrete	
	LLT216	Utah	Pietra	
	LLT217	Vermont	Pietra	
	LLT218	Ontario	Concrete	
	LLT219	Quebec	Concrete	



Tino LLT208
Honed Limestone




Residential & Trade Centre




Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Loose lay installation guide


Make the right start with our installation guide.



Acoustic performance


Explore flooring designed for quieter spaces.

Commercial Centre




Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



A&D warranty

Find out why our commercial warranty stand out from the rest.



Technical resources

View product, technical and performance information and tools.

Environmental accreditations

The LooseLay Originals range receives a GreenRate™ Level 'A' rating for quality sustainable building material, and LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, and maintaining environmentally friendly manufacturing processes.



All Karndean range and format credentials are at our certification policy level – please check for the current certification status.

	Standard	Result
Surface treatment		K-Guard+® PU coating
Backing		PVC Friction Pad
Warranty¹	Commercial Domestic	15 years wear Lifetime wear
Bevelled edge		No
Standards	ASTM F1700	Pass
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	AS / NZS ISO 9239.1:2003	CRF: 8.3 kW/m ² Smoke value: 143% min.
Staining resistance	EN ISO 26987 / EN 423 ASTM F925	Excellent Pass
Light fastness	ISO 105-B02 ASTM F1515	Pass (≥7) Pass (<8)
Abrasion resistance	EN649 ISO 10582 ASTM D3884	Group T Type 1 Pass
Flexibility	ISO 24344	Pass
Dimensional stability	EN 434 / ISO 23999 ASTM F2199	Pass (≤0.10%) Pass
Acoustic impact noise reduction	ISO 140-8 Improved Impact Sound Insulation ASTM E492-09 Impact Insulation Class	ΔL _w = 14 dB IIC 56 dB
		Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay under certain build specifications – precise details available from Karndean. NCC 2016 F5.3 (a) result refers to Karndean INSUL Marshall Day Software report for your MULTI Res specification including AAC Star rating.
Electrical behaviour body voltage	EN 1815 AATCC 134-1996	Pass Pass
Indentation - residual	EN 433 / ISO 24343-1 ASTM F1914	Pass (≤0.1 mm) Pass (<8%)
Castor chair continuous use	EN 425 / ISO 4918	Pass
Thermal resistance	ISO 8302	0.0245 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance²	AS / NZS 4586:2013	R10 Planks R9 Tiles
Adhesive	Karndean Hi-Tack PS Adhesive when applicable; please refer to our installation instructions.	
Environmental	GBCA / NZGBC GreenStar Rating System Floorscore SCS-EC10.3-2014 v4.0	GreenRate Level 'A'; LCA Silver Plus; Best Practice PVC Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification). Sustainability Assessment for Resilient Floor Coverings; Silver certified product. Manufactured to quality and environment management systems standards.
	Indoor Air Comfort Environmental Product Declaration	
	NSF / ANSI 332	
	ISO 14001 / ISO 9001	
Recycling		Suitable
Phthalate free		Yes

¹ Subject to terms.

² Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

LooseLay Originals Wood

1050.0mm x 250.0mm (41.34" x 9.84")



Bridgeport **LLP157**

European Oak



Linosa **LLP148**

European Oak



Hartford **LLP112***

Rustic Oak



Budelli **LLP146**

Limed Oak



Sicilia **LLP142**

Character Oak



Brockton **LLP153**

European Oak



Waterbury **LLP152**

Limed Oak



Lampione **LLP147**

European Oak

LooseLay Originals Wood

1050.0mm x 250.0mm (41.34" x 9.84")



Ashland **LLP95**

White Oak



Country Oak **LLP92**

Character Oak



Hamden **LLP156**

Character Oak



Cambridge **LLP113**

Rustic Oak



Providence **LLP108**

White Oak



Vintage Timber **LLP105**

Rustic Oak



Lampione **LLP147**
European Oak

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

LooseLay Originals Wood

1050.0mm x 250.0mm (41.34" x 9.84")



Levanzo **LLP150** Limed Oak



Danbury **LLP154** European Oak



Stamford **LLP109*** Rustic Oak



Heritage Oak **LLP102** Rustic Oak



Hamden **LLP156**
Character Oak



Lampione **LLP147** | Linosa **LLP148**
European Oak

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

LooseLay Originals Stone


500.0mm x 610.0mm (19.69" x 24.02")



Maine **LLT213** Concrete




Capri **LLT209** Honed Limestone

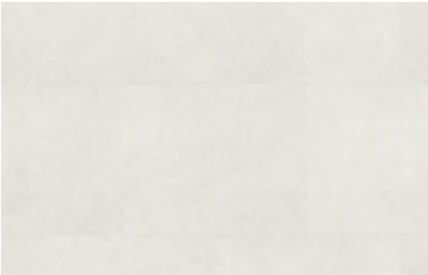

Tino **LLT208** Honed Limestone



Quebec **LLT219** Concrete

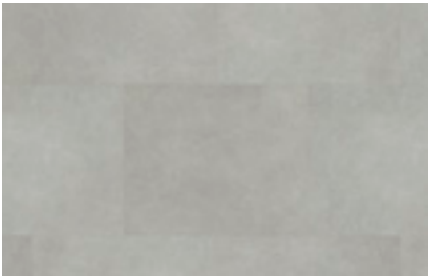

Ontario **LLT218** Concrete



Utah **LLT216** Pietra



Colorado **LLT201** Pietra



Nisida **LLT210** Concrete

LooseLay Originals Stone

500.0mm x 610.0mm (19.69" x 24.02")




Vermont **LLT217** Pietra



Dakota **LLT212** Concrete



Vulcano **LLT211** Concrete

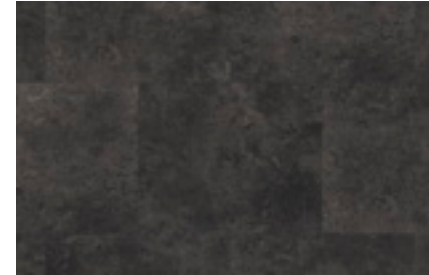

Madison **LLT203** Honed Limestone



Utah **LLT216**
Pietra



Nisida LLT210
Concrete



Ontario LLT218
Concrete

Rigid core



Rigid core is a hybrid LVT resilient flooring product featuring our proprietary K-Core® technology, a 5G® or 2G™ click-locking mechanism and a specially formulated acoustic backing, and as such, is an ideal alternative to laminate and engineered hardwood click floors.



River Spotted Gum SCB-VGW131T*

RIGID CORE Kortok	RIGID CORE Van Gogh	RIGID CORE Knight Tile
6.5mm hybrid LVT woods & stones	5.5mm hybrid LVT wood planks	4.5mm hybrid LVT woods & stones

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Rigid core LVT flooring

Experience the convenience of superior low-profile rigid core planks and tiles aligning with your other flooring types for quick and effortless installation coupled with exceptional acoustic benefits. Our flooring is engineered with our revolutionary K-Core® technology, allowing for easy installation over most existing hard floors, effectively concealing most imperfections for a flawless finish. Our Korlok flooring boasts a 100% PVC rigid core layer that enables installers to easily cut it by hand, eliminating the need for expensive power tools.

Features and benefits



Installs over existing hard floors

You want to install over an existing floor such as ceramic tiles or floorboards, or minor uneven subfloor.



Click-locking mechanism

The Välinge 5G® click-lock system ensures quick, secure installation, supported by the HoldSafe® warranty for lasting durability, ensuring securely locked planks remain intact.



Hides subfloor imperfections*

Engineered to absorb most minor* subfloor imperfections like lumps, bumps, cracks, and gaps for a smooth, quiet surface.



Reduces noise transfer

Pre-attached acoustic foam backing reduces noise transfer by up to 21dB, ideal for upstairs spaces and lofts. Improving the living experience in a residential setting or the atmosphere of a high traffic public.



Minimises visual telegraphing


Innovative design minimises visual telegraphing, which refers to the appearance of subfloor imperfections on the surface of the flooring. By reducing this effect, Korlok maintains a flawless appearance, enhancing the aesthetic appeal of your space.



K-Guard+®

Karndean's K-Guard+® protective surface treatment (PU) ensures our flooring provides a durable and hygienic surface that is easy to clean, resisting dust, allergens, and microorganisms, while maintaining its integrity even after splashes and spills.

Premium rigid core construction

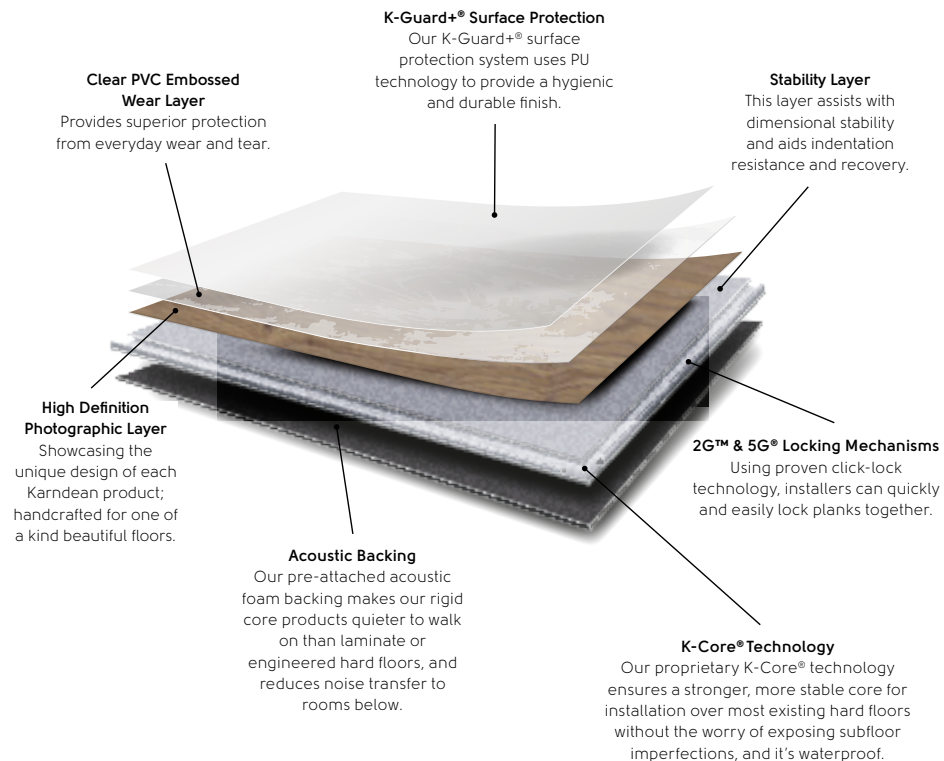

Some of our rigid core products feature the added security of the 5G® click-locking mechanism, covered by our HoldSafe® lifetime warranty, which guarantees securely locked planks will remain locked in for life.



2G™ and 5G® are a patented technology invented by Välinge Innovation AB. The 2G™ and 5G® word marks and logo are registered trademarks owned by Välinge Innovation AB.



It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area.

Range Hub

Korlok 




Our Korlok collection has been inspired by popular natural wood species, including the contemporary European Oak, classic Australian Spotted Gum and Blackbutt, rustic Barnwood and Hickory, and the elegant subtlety of Ash, offering styles to suit any interior. The range also features beautiful stones inspired by nature and modern design trends, including the sleek look of Concrete, luxurious Marble, sophisticated Limestone and Slate, and eye-catching Terrazzo, providing a versatile palette for all tastes.

Key facts	
Thickness:	6.5mm
Plank size:	1420.0 x 225.0mm (55.91" x 8.86")
Tile sizes:	457.0 x 600.0mm (17.99" x 23.62") 457.0 x 935.0mm (17.99" x 36.81")
Bevel:	Micro
Wear layer:	0.5mm
Box quantity:	3.195m ² / 10 planks 2.742m ² / 10 tiles 2.564m ² / 6 tiles
Slip rating:	R10
Locking mechanism:	5G [®]

Residential & Trade Centre

Commercial Centre




Consumer brochures

Access our online brochures and take a deep dive into the Korlok range.



BIM Store objects

Render a Korlok floor into your project.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.



Explore the range online

View the full range of Korlok products on our website.



Explore the range online

View the full range of Korlok products on our website.


Wood	Product code	Name	Australian woods	High variation
	RKP8101	Baltic Washed Oak		
	RKP8103	Warm Ash		•
	RKP8105	Texas White Ash		•
	RKP8110	Antique French Oak		
	RKP8116	Canadian Urban Oak		
	RKP8118	Warm Spotted Gum	•	•
	RKP8119	Weathered Spotted Gum	•	•
	RKP8207	Light Barnwood		•
	RKP8239	Light Spotted Gum	•	•
	RKP8240	Natural Blue Gum	•	•
	RKP8241	Bisque Ash		•
	RKP8242	Golden Ash		•
	RKP8243	Limed Loire Oak		
	RKP8244	Grey Loire Oak		
	RKP8245	Pale Loire Oak		
	RKP8246	Natural Fiddleback Blackbutt	•	
	RKP8247	Refined Fiddleback Blackbutt	•	
	RKP8248	Mountain Hickory		

Stone	Product code	Name	Australian woods	High variation
	RKT2410	Pebble Grey		
	RKT2413	Palazzo Marble		•
	RKT2414	Mezzo Perla		
	RKT2417	Grey Castello Marble		
	RKT2423	Venetian Slate		
	RKT3018	Tortora Breccia Marble		
	RKT3020	Luna Breccia Marble		
	RKT3021	Bianco Breccia Marble		



Weathered Spotted Gum RKP8119



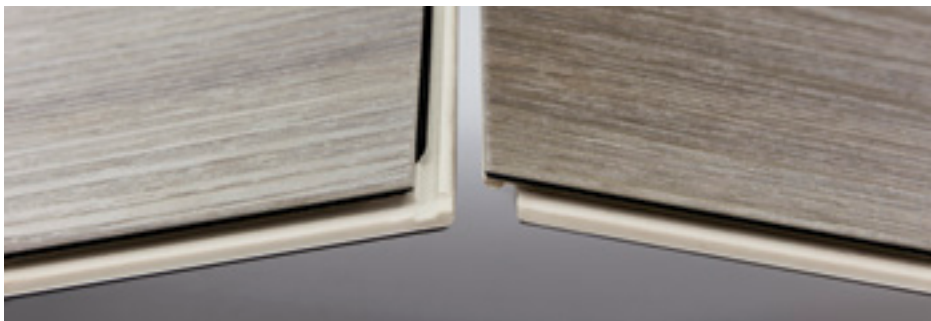

Residential & Trade Centre



Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Korlok installation guide


Make the right start with our installation guide.



Acoustic performance


Explore flooring designed for quieter spaces.

Commercial Centre




Commercial warranty brochure

Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



Technical resources

View product, technical and performance information and tools.

Environmental accreditations

The Korlok range receives a GreenRate™ Level 'A' rating for quality sustainable building material, and LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, and maintaining environmentally friendly manufacturing processes.



All Karndean range and format credentials are at our certification policy level – please check for the current certification status.

	Standard	Result
Locking system¹		5G® Fold Down installation system
Surface treatment		K-Guard+® PU coating
Warranty²	Commercial Domestic	15 years wear Lifetime wear
Bevelled edge		Micro
Standards	EN 16511	Pass: Multilayer modular floorcovering panels
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	AS NZS ISO 9239.1:2003	CRF: 6.8 kW/m ² Smoke value: 154% min.
Staining	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass ≥6
Abrasion resistance	EN 13329 Annex E	Pass (4000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (<0.25%)
Swelling	ISO 24336	Pass (0.2 %)
Acoustic impact noise reduction	EN ISO 10140-1:2016 NCC F5.3(a) requirement of ≤62 dB under ISO 717.2:2013 G6.3.2 impact insulation class ≥55 IIC ASTM E492-09	ΔL _w = 21 dB Ln,w = 52 dB Pass IIC 62
	Suitable for use on upper floors of residential high rise apartment buildings without the need for a separate acoustic underlay.	
Indentation - residual	ISO 24343-1	Pass (<0.1 mm)
Impact resistance	EN 13329 Annex F	Pass (≥1800 mm)
Castor chair continuous use	ISO 4918/ EN 425	Pass (25,000 cycles)
Thermal resistance	ISO 8302	0.0515 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance³	AS4586:2013 Appendix D	R10
Adhesive	None required; please install according to our installation instructions.	
Environmental	GBCA/NZGBC GreenStar Rating System Floorscore SCS-EC10.3-2014 v4.0 Indoor Air Comfort Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	GreenTag Level A; LCA Silver Plus Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification). Sustainability Assessment for Resilient Floor Coverings; Silver certified product. Manufactured to quality and environment management systems standards.
Recycling		Suitable
Phthalate free		Yes

¹ 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

² Subject to terms.

³ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.



Korlok Wood

1420.0mm x 225.0mm (55.91" x 8.86")



Pale Loire Oak **RKP8245**



Grey Loire Oak **RKP8244**



Texas White Ash **RKP8105***



Baltic Washed Oak **RKP8101**



Canadian Urban Oak **RKP8116**



Natural Blue Gum **RKP8240***



Bisque Ash **RKP8241***




Mountain Hickory **RKP8248**

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Korlok Wood


1420.0mm x 225.0mm (55.91" x 8.86")

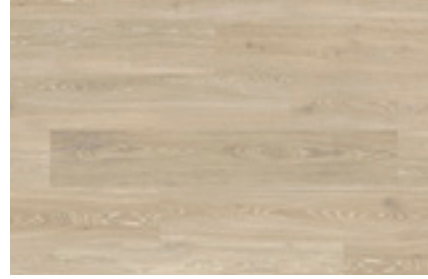

Limed Loire Oak **RKP8243**



Light Spotted Gum **RKP8239***

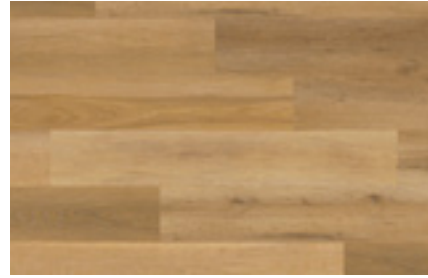

Golden Ash **RKP8242***



Natural Fiddleback Blackbutt **RKP8246**



Warm Ash **RKP8103***



Weathered Spotted Gum **RKP8119***



Light Barnwood **RKP8207***



Warm Spotted Gum **RKP8118***

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Korlok Wood

1420.0mm x 225.0mm (55.91" x 8.86")



Refined Fiddleback Blackbutt **RKP8247**



Antique French Oak **RKP8110**



Texas White Ash **RKP8105***



Antique French Oak **RKP8110**

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.



Light Barnwood RKP8207*



* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.




Limed Loire Oak RKP8243

Korlok Stone


457.0 x 935.0mm (17.99" x 36.81")

Our three stunning Korlok Breccia marble designs are offered in a larger tile format, setting them apart from our other stone tile designs. This larger size is perfect for highlighting the intricate, natural beauty of Italian breccia marble, where tiny pieces of rock become embedded in the marble as it forms.


New larger size tiles now available in these 3 designs

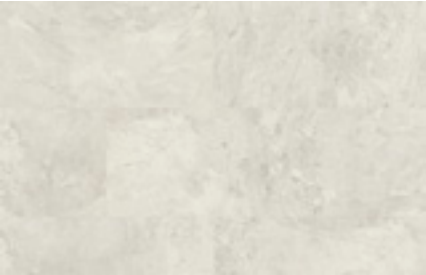

Bianco Breccia Marble **RKT3021**

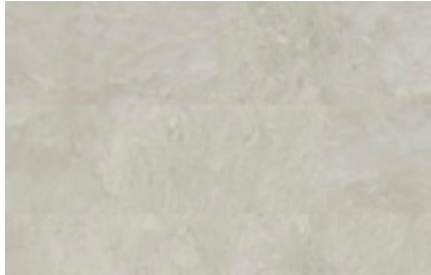

Luna Breccia Marble **RKT3020**

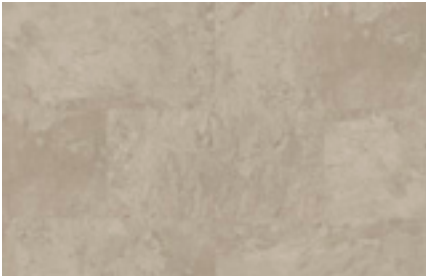

Tortora Breccia Marble **RKT3018**



Bianco Breccia Marble **RKT3021**

Korlok Stone

457.0mm x 600.0mm (17.99" x 23.62")




Palazzo Marble **RKT2413***




Venetian Slate **RKT2423**



Mezzo Perla **RKT2414**

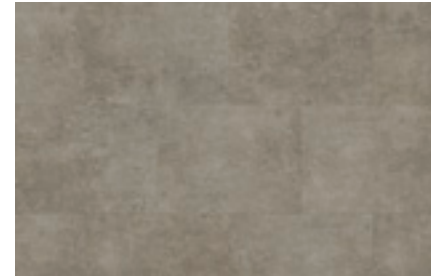

Pebble Grey **RKT2410**

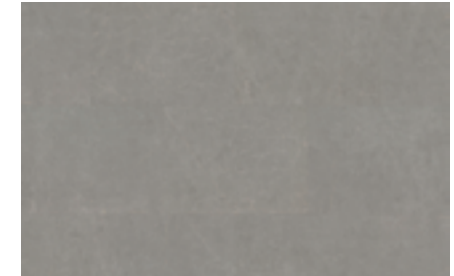

Grey Castello Marble **RKT2417**



Palazzo Marble **RKT2413***

* Please note: as a feature of the design, these products incorporate a high colour variation between individual tiles.



Bisque Ash RKP8241*



Luna Breccia Marble RKT3020

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Range Hub

Van Gogh



Van Gogh showcases a stunning selection of timber-inspired designs, celebrating the rich diversity and character of the world's most beautiful woods. From classic European species like Oak, Elm, Maple, and Birch to quintessential Australian timbers such as Blackbutt and Spotted Gum, this collection highlights the natural beauty, colour, and texture of these iconic woods. With a variety of tones and textures, the Van Gogh Range offers a versatile selection that complements any interior style, bringing the warmth and elegance of nature into your space.


Key facts

Thickness:	5.5mm	Box quantity:	2.196m ² / 10 planks
Plank size:	1220.0mm x 180.0mm (48.03" x 7.09")	Slip rating:	R10
Bevel:	Micro	Locking mechanism:	5G®
Wear layer:	0.5mm		

Van Gogh is a Dual Format range


See page 100 for our Van Gogh gluedown information

Residential & Trade Centre



Consumer brochures

Access our online brochures and take a deep dive into the Van Gogh range.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Explore the range online


View the full range of Van Gogh products on our website.

Commercial Centre



BIM Store objects

Render a Van Gogh floor into your project.



Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.




Explore the range online

View the full range of Van Gogh products on our website.


Wood	Rigid core product code	Name	Australian woods	High variation	Available in gluedown
	SCB-VGW81T	Country Oak			•
	SCB-VGW82T	Distressed Oak			•
	SCB-VGW84T	Birch			•
	SCB-VGW85T	French Oak			•
	SCB-VGW86T	Classic Oak			•
	SCB-VGW89T	Ebony			•
	SCB-VGW103T	Northern Spotted Gum	•	•	•
	SCB-VGW107T	Blush Oak			•
	SCB-VGW110T	Greige Oak			•
	SCB-VGW111T	Light Distressed Oak			•
	SCB-VGW112T	Misty Grey Oak			•
	SCB-VGW127T	Natural Maple			•
	SCB-VGW128T	Smoked Maple			•
	SCB-VGW129T	Washed Blackbutt	•		•
	SCB-VGW130T	Eastern Blackbutt	•		•
	SCB-VGW131T	River Spotted Gum	•	•	•
	SCB-VGW132T	Marron Elm			•
	SCB-VGW133T	Millstone Sycamore			•
	SCB-VGW134T	Nocturne Oak			•
	SCB-VGW135T	Tranquil Oak			•



Natural Maple SCB-VGW127T

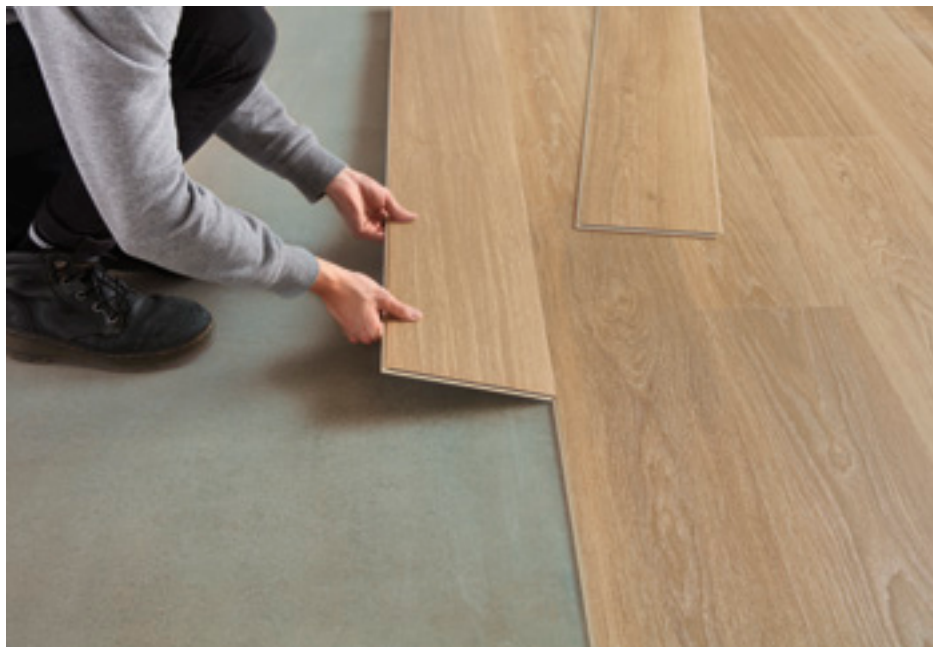


Residential & Trade Centre




Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Van Gogh installation guide

Make the right start with our installation guide.



Acoustic performance

Explore flooring designed for quieter spaces.

Commercial Centre




Commercial warranty brochure

Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



Technical resources

View product, technical and performance information and tools.

	Standard	Rigid core result
Thickness	ISO 24346	5.5 mm
Wear layer	ISO 24340	0.5 mm
Locking system ¹		5G® Fold Down installation system
Surface treatment		K-Guard+® PU coating
Warranty ²	Commercial Domestic	15 years wear Lifetime wear
Bevelled edge		Micro
Standards	EN 16511	Pass: Multilayer modular floorcovering panels
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	AS ISO 9239.1:2003	CRF: 10.4 kW/m ² Smoke Value: 200% min
Staining	EN 438-2	Pass (grade 5)
Light fastness	ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 13329 Annex E	Pass (> 4000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (≤ 0.25%)
Swelling	ISO 24336	Pass (0.2%)
Acoustic impact noise reduction	EN ISO 10140-1:2016 NCC F5.3(a) requirement of ≤62 dB under ISO 717.2:2013 G6.3.2 impact insulation class ≥ 55 IIC ASTM E492-09	ΔL _w = 21 dB Ln,w = 56 dB Pass 66 dB IIC Suitable for use on upper floors of a residential high rise apartment buildings without the need for a separate acoustic underlay
Indentation – residual	ISO 24343-1	Pass (≤0.1 mm)
Impact resistance	EN 13329 Annex F	Pass (≥1800 mm)
Castor chair continuous use	EN 425/ISO 4918	Pass (25 000 cycles)
Thermal resistance	ISO 8302	0.0515 m ² K/W. Suitable for underfloor heating. Max 27°C
Slip resistance ³	AS4586:2013 Appendix D	R10
Adhesive		None required; please install according to our installation instructions.
Environmental	FloorScore SCS-EC10.3-2014 v4.0 Environmental Product Declaration ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free		Yes

¹ 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

² Subject to terms.

³ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

Van Gogh Wood


1220.0mm x 180.0mm (48.03" x 7.09")




Blush Oak **SCB-VGW107T**



Tranquil Oak **SCB-VGW135T**

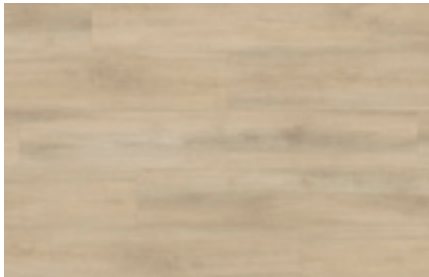

Millstone Sycamore **SCB-VGW133T**

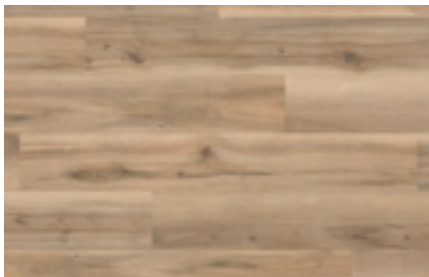

Natural Maple **SCB-VGW127T**




Birch **SCB-VGW84T**



Washed Blackbutt **SCB-VGW129T**



Eastern Blackbutt **SCB-VGW130T**

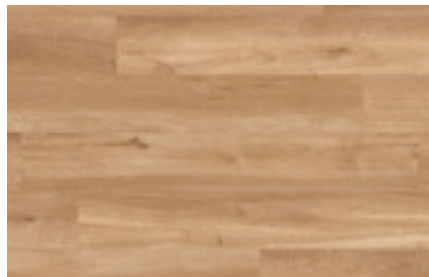

French Oak **SCB-VGW85T**

Van Gogh Wood

1220.0mm x 180.0mm (48.03" x 7.09")




Country Oak **SCB-VGW81T**



Distressed Oak **SCB-VGW82T**




Misty Grey Oak **SCB-VGW112T**

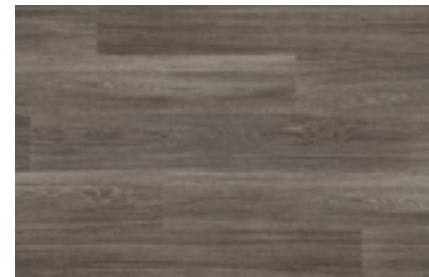

Nocturne Oak **SCB-VGW134T**




Light Distressed Oak **SCB-VGW111T**

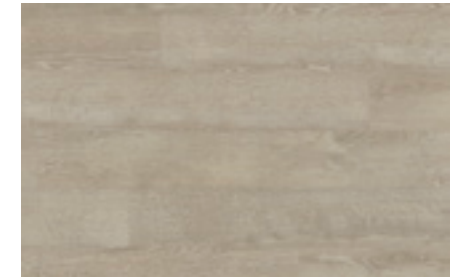

Greige Oak **SCB-VGW110T**



Smoked Maple **SCB-VGW128T**

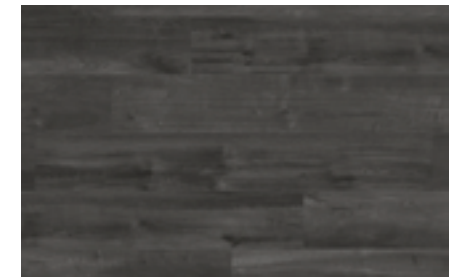

Ebony **SCB-VGW89T**

Van Gogh Wood

1220.0mm x 180.0mm (48.03" x 7.09")




River Spotted Gum **SCB-VGW131T***



Northern Spotted Gum **SCB-VGW103T***



Classic Oak **SCB-VGW86T**

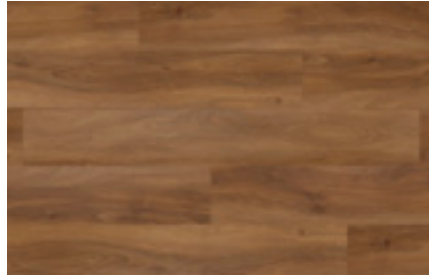

Marron Elm **SCB-VGW132T**



Smoked Maple **SCB-VGW128T**



Tranquil Oak **SCB-VGW135T**

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Range Hub

Knight Tile 

The Knight Tile collection offers a versatile range of wood & stone designs for residential & light commercial spaces. The wood planks are crafted to reflect the natural grain of timber, with options like the cool tones of Coastline Oak, mid-tones of Mid Limed Oak, and dark hues of Shadow Studio Oak. The stone designs feature a variety of looks, from classic pale to contemporary dark styles. It includes the timeless Grey Riven Slate, modern Honed Oyster Slate, and the striking Honed Charcoal Slate to blend seamlessly into any interior style.

Key facts

Thickness:	4.5mm	Wear layer:	0.3mm
Plank size:	1220.0mm x 180.0mm (48.03" x 7.09")	Box quantity:	3.074m ² / 14 planks 2.787m ² / 20 tiles
Tile sizes:	304.8mm x 457.2mm (12.0" x 18.0")	Slip rating:	Planks: R10 Tiles: R9
Bevel:	No	Locking mechanism:	2G™

Knight Tile is a Dual Format range


See page 120 for our Knight Tile gluedown information

Residential & Trade Centre



Consumer brochures

Access our online brochures and take a deep dive into the Knight Tile range.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Explore the range online


View the full range of Knight Tile products on our website.

Commercial Centre



BIM Store objects

Render a Knight Tile floor into your project.



Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.



Explore the range online

View the full range of Knight Tile products on our website.

Wood	Rigid core product code	Name	Australian woods	High variation	Available in gluedown
	SCB-KP94	Pale Limed Oak		•	•
	SCB-KP95	Rose Washed Oak		•	•
	SCB-KP96	Mid Limed Oak		•	•
	SCB-KP99	Lime Washed Oak		•	•
	SCB-KP104	Light Worn Oak			•
	SCB-KP105	White Painted Oak			•
	SCB-KP138	Grey Limed Oak			•
	SCB-KP141	Urban Spotted Gum	•		•
	SCB-KP143	Blond Character Oak			•
	SCB-KP144	Washed Character Oak			•
	SCB-KP146	Traditional Character Oak			•
	SCB-KP147	Coastline Oak			•
	SCB-KP149	Classic Spotted Gum	•		•
	SCB-KP150	Shadow Studio Oak			•
	SCB-KP153	Nordic Limed Oak			•
	SCB-KP157	Coastal Blackbutt	•	•	•
Stone	Rigid core product code	Name		High variation	Available in gluedown
	SCB-ST16-18	Grey Riven Slate			•
	SCB-ST17-18	Honed Oyster Slate			•
	SCB-ST19-18	Honed Charcoal Slate			•
	SCB-ST20-18	Honed Pebble Slate			•
	SCB-ST21-18	Dove Grey Concrete			•
	SCB-ST22-18	Smoked Concrete			•




Classic Spotted Gum SCB-KP149






Smoked Concrete SCB-ST22-18

Residential & Trade Centre




Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Knight Tile installation guide

Make the right start with our installation guide.



Acoustic performance


Explore flooring designed for quieter spaces.

Commercial Centre




Commercial warranty brochure

Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



Technical resources

View product, technical and performance information and tools.

	Standard	Rigid core result
Thickness	ISO 24346	4.5 mm
Wear layer	ISO 24340	0.3 mm
Locking system ¹		2G™ angling installation system
Surface treatment		K-Guard+® PU coating
Warranty ²	Commercial Domestic	10 years wear Lifetime wear
Bevelled edge		No
Standards	EN 16511	Pass: Multilayer modular floorcovering panels
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	AS ISO 9239.1:2003	CRF: 10.1 kW/m ² Smoke value: 171% min
Staining	EN 438-2	Pass (Grade 5)
Light fastness	ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 13329 Annex E	Pass (≥10,000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (≤0.25%)
Swelling	ISO 24336	Pass (0.2%)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL _W = 19 dB
Indentation – residual	ISO 24343-1	Pass (≤0.1 mm)
Impact resistance	EN13329 Annex F	Pass (≥1800 mm)
Castor chair continuous use	EN 425/ISO 4918	Pass (10 000 cycles)
Thermal resistance	ISO 8302	0.0338 m ² K/W. Suitable for underfloor heating. Max 27°C
Slip resistance ³	AS4586:2013 Appendix D	Planks: R10 Tiles: R9
Adhesive		None required; please install according to our installation instructions.
Environmental	Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration ISO 14001 / ISO 9001	Indoor air quality certified; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free		Yes

¹ 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

² Subject to terms. Please see our website.

³ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

Knight Tile Wood

1220.0mm x 180.0mm (48.03" x 7.09")



White Painted Oak **SCB-KP105**



Nordic Limed Oak **SCB-KP153**



Coastal Blackbutt **SCB-KP157***




Coastline Oak **SCB-KP147**



Rose Washed Oak **SCB-KP95***



Lime Washed Oak **SCB-KP99***

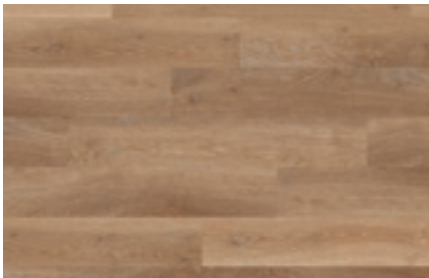

Pale Limed Oak **SCB-KP94***



Classic Spotted Gum **SCB-KP149**

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Knight Tile Wood

1220.0mm x 180.0mm (48.03" x 7.09")



Blond Character Oak **SCB-KP143**



Grey Limed Oak **SCB-KP138**



Washed Character Oak **SCB-KP144**




Light Worn Oak **SCB-KP104**



Traditional Character Oak **SCB-KP146**



Urban Spotted Gum **SCB-KP141**

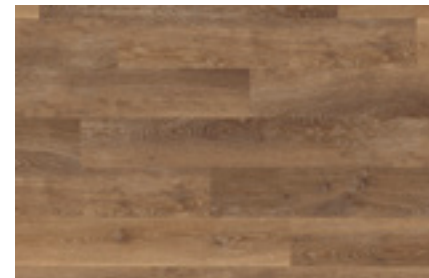

Mid Limed Oak **SCB-KP96***



Shadow Studio Oak **SCB-KP150**

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Knight Tile Stone

304.8mm x 457.2mm (12.0" x 18.0")



Honed Oyster Slate **SCB-ST17-18**



Dove Grey Concrete **SCB-ST21-18**




Honed Pebble Slate **SCB-ST20-18**



Smoked Concrete **SCB-ST22-18**



Grey Riven Slate **SCB-ST16-18**

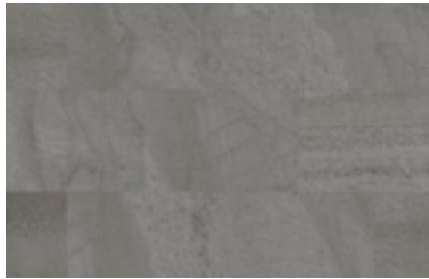

Honed Charcoal Slate **SCB-ST19-18**



Honed Pebble Slate **SCB-ST20-18**



Dove Grey Concrete **SCB-ST21-18**


Gluedown



Gluedown LVT flooring provides limitless design possibilities. Pieces can be cut and laid to create stylish custom installations or zoning that sets an area apart.



■ Dove Grey Concrete ST21

 <p>Art Select GLUEDOWN</p>	 <p>Van Gogh GLUEDOWN</p>	 <p>Opus GLUEDOWN</p>	 <p>Knight Tile GLUEDOWN</p>
<p>3mm LVT wood planks</p>	<p>3mm LVT wood planks</p>	<p>2.5mm LVT woods & stones</p>	<p>2mm LVT woods & stones</p>

Gluedown LVT flooring

Elevate your project with our premium gluedown luxury vinyl flooring (LVT) from Karndean. This flooring solution offers maximum design flexibility, allowing you to create intricate, custom layouts with ease. Perfect for both residential and commercial spaces, our gluedown LVT provides a durable and long-lasting finish, ensuring your flooring stays securely in place.

With gluedown installation, each piece is firmly adhered, offering enhanced stability and precision. Available in a variety of designs, it's easy to cut and fit for unique layouts, borders, and zoning. At 2mm, 2.5mm or 3mm thick, Karndean gluedown LVT seamlessly integrates with other flooring types, while its tough wear layer provides protection against daily wear and tear.

Features and benefits



Individually replaceable

Should part of the floor become damaged, simply lift and replace the plank with a new one, giving you peace of mind throughout the lifetime of your floor.



No expansion gap required

Can be fitted tight against straight or curved walls and fixtures. No need to leave any expansion gap.



Laying possibilities


It's not just the design you choose, but how you lay it. Our gluedown format gives you the ability to add your individual style and add intrigue to any room with a multitude of creative laying patterns.



Custom layouts

For stylish aesthetic or functional zoning purposes, offering virtually limitless possibilities.

Premium gluedown construction

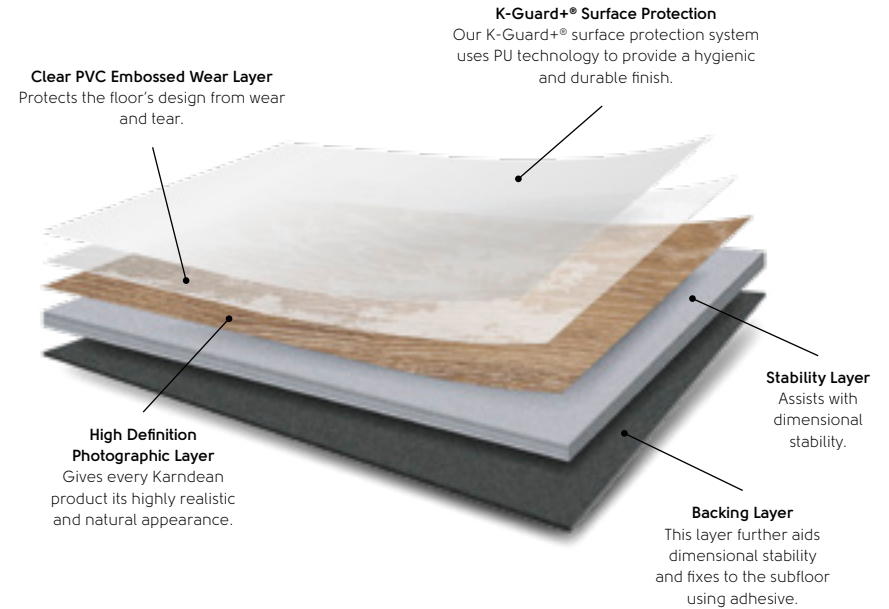

It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area.



* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Range Hub


Art Select




The premium Art Select range captures the charm and character of natural wood, bringing Oak and Hickory to life with intricate designs and realistic embossing. Each plank showcases the unique grains, knots, and textures that make real wood so captivating. More than just a beautiful wood floor, every Art Select design tells its own story, offering a rich and authentic feel that adds depth and elegance to any space.

Key facts	
Thickness:	3.0mm
Plank sizes:	914.4mm x 152.4mm (36.0" x 6.0") 1219.2mm x 177.8mm (48.0" x 7.0") 228.6mm x 76.2mm (9.0" x 3.0")
Bevel:	Standard
Wear layer:	0.7mm
Box quantity:	3.345m ² / 24 planks 3.252m ² / 15 planks 3.345m ² / 192 planks
Slip rating:	R9

Residential & Trade Centre



Consumer brochures
Access our online brochures and take a deep dive into the Art Select range.



Floorstyle visualiser tool
Visualise Karndean vinyl planks in your own rooms.



Explore the range online
View the full range of Art Select products on our website.

Commercial Centre




BIM Store objects
Render a Art Select floor into your project.




Commercial Floorstyle visualiser tool
Visualise Karndean LVT flooring in your project.




Explore the range online
View the full range of Art Select products on our website.

Wood	Product code	Name
	EW01	Hickory Paprika
	EW02	Hickory Peppercorn
	EW03	Hickory Nutmeg
	HC01	Dawn Oak
	HC02	Morning Oak
	HC03	Dusk Oak
	HC04	Sundown Oak
	HC05	Evening Oak
	HC06	Midnight Oak
	RL01	Spring Oak
	RL02	Summer Oak
	RL03	Autumn Oak
	RL04	Winter Oak
	AP01	Blond Oak
	AP02	Auburn Oak
	AP03	Black Oak

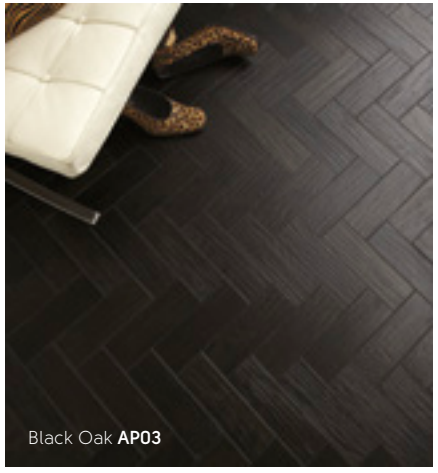





Residential & Trade Centre



Warranty brochure
Discover comprehensive warranty protection for your customer's home.




Art Select installation guide
Make the right start with our installation guide.



Acoustic performance
Explore flooring designed for quieter spaces.

Commercial Centre



Commercial Warranty Brochure
Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration
Independently verified EPDs. View, download & compare LCAs.



Technical resources
View product, technical and performance information and tools.

Environmental accreditations

The Art Select range receives a GreenRate™ Level 'A' rating for quality sustainable building material, and LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, and maintaining environmentally friendly manufacturing processes.



All Karndean range and format credentials are at our certification policy level – please check for the current certification status.

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Domestic	20 years wear Lifetime wear
Bevelled edge		Standard
Standards	EN 649/EN ISO 10582 ASTM F1700	Pass Pass
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	34: Commercial very heavy 23: Domestic heavy
Reaction to fire	AS NZS ISO 9239.1:2003 Handcrafted Oak Royale Oak Premier Parquet	CRF: 7.1 kW/m ² 6.4 kW/m ² 8.5 kW/m ² 8.5 kW/m ² Smoke value: 121% min 114% min 177% min 220% min
Staining resistance	EN ISO 26987/EN 423 ASTM F925	Excellent Pass
Light fastness	ISO 105-B02 ASTM F1515	Pass (≥ 6) Pass (< 8)
Abrasion resistance	EN 660-2 ISO 10582 ASTM D3884	Group T Type I Pass
Flexibility	ISO 24344	Pass
Dimensional stability	EN 434/ISO 23999 ASTM F2199	Pass (≤ 0.25%) Pass
Acoustic impact noise reduction**	EN ISO 717-2/EN ISO 140-8	ΔL _w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433/ISO 24343-1 ASTM F1914	Pass (≤ 0.1 mm) Pass (< 8%)
Castor chair continuous use	EN 425/ISO 4918	Pass
Thermal resistance	ISO 8302	0.0147 m ² K/W Suitable for underfloor heating
Slip resistance***	AS/NZS 4586:2013	R9
Adhesive	General use: High temperature:	Karndean Mega-Bond Karndean 8000 2-part Polyurethane
Environmental	GBCA/NZGBC GreenStar Rating System Floorscore SCS-EC10.3-2014 v4.0 Indoor Air Comfort Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	GreenRate Level 'A'; LCA Silver Plus; Best Practice PVC Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification). Sustainability Assessment for Resilient Floor Coverings; Conformant product. Manufactured to quality and environment management systems standards.
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Result is L_{n,w} = 58 dB when installed on Regupol 4515 acoustic underlay.

*** Slip resistance is measured on ex-factory product. Slip resistance will be affected by surface contamination, use and how the product is maintained.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

Art Select Handcrafted

914.4mm x 152.4mm (36.0" x 6.0")



Hickory Paprika **EW01**



Hickory Peppercorn **EW02**



Hickory Nutmeg **EW03**



Rustic aged look

Hickory Paprika **EW01**

Art Select Parquet


228.6mm x 76.2mm (9.0" x 3.0")




Blond Oak **AP01**



Auburn Oak **AP02**

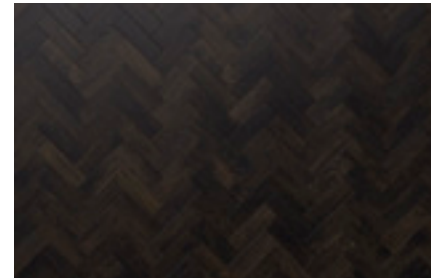


Black Oak **AP03**

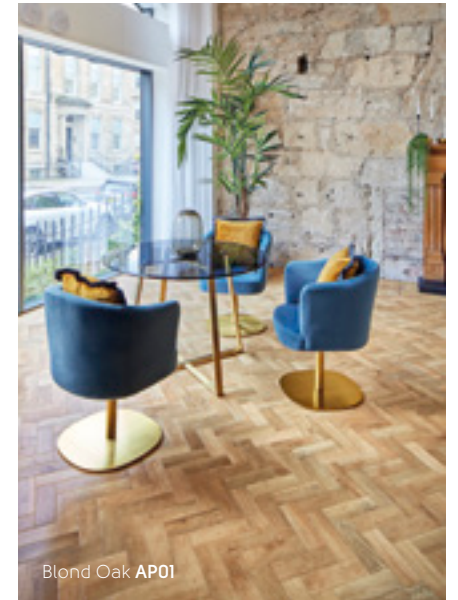


Blond Oak **AP01**


Lay our parquet planks in various patterns to suit any style.



Herringbone



Block



Brick

Art Select Oak Royale


1219.2mm x 177.8mm (48.0" x 7.0")




Spring Oak **RL01**




Summer Oak **RL02**

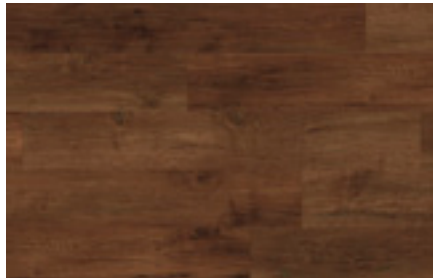

Autumn Oak **RL03**

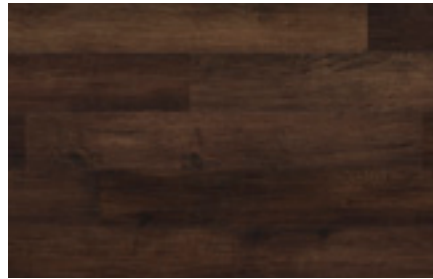

Winter Oak **RL04**

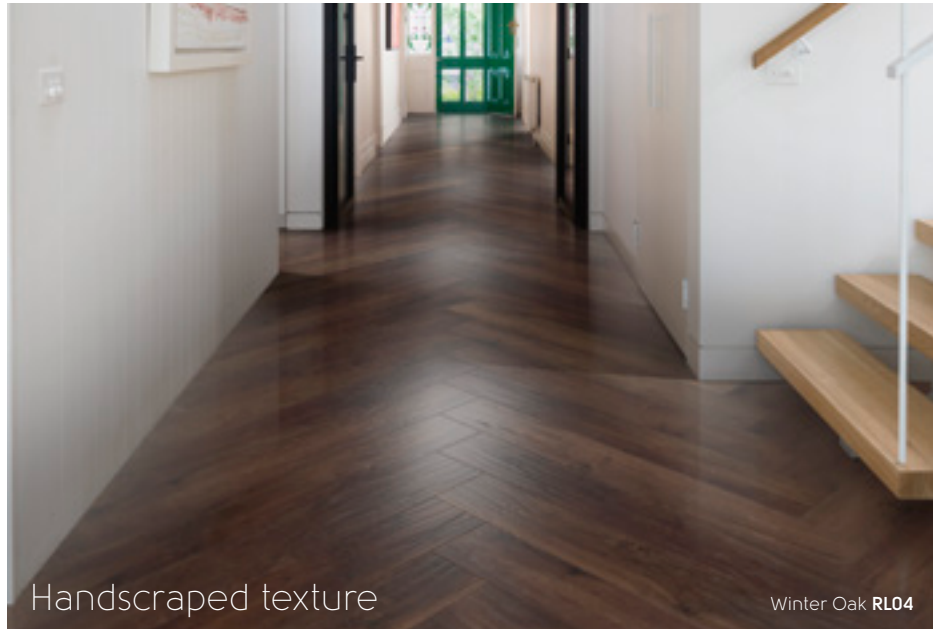

Handscraped texture

Winter Oak **RL04**

Art Select Oak Premier

914.4mm x 152.4mm (36.0" x 6.0")



Dawn Oak **HC01**



Morning Oak **HC02**



Dusk Oak **HC03**



Sundown Oak **HC04**



Evening Oak **HC05**



Midnight Oak **HC06**



Sundown Oak HC04



Spring Oak RL01

Range Hub

Van Gogh 



Van Gogh showcases a stunning selection of timber-inspired designs, celebrating the rich diversity and character of the world's most beautiful woods. From classic European species like Oak, Elm, Maple, and Birch to quintessential Australian timbers such as Blackbutt and Spotted Gum, this collection highlights the natural beauty, colour, and texture of these iconic woods. With a variety of tones and textures, the Van Gogh range offers a versatile selection that complements any interior style, bringing the warmth and elegance of nature into your space.


Key facts

Thickness:	3.0mm	Wear layer:	0.5mm
Plank size:	1219.2mm x 177.8mm (48.0" x 7.0")	Box quantity:	3.252m ² / 15 planks
Bevel:	Micro	Slip rating:	R10

Van Gogh is a Dual Format range

See page 70 for our Van Gogh rigid core information

Residential & Trade Centre



Consumer brochures

Access our online brochures and take a deep dive into the Van Gogh range.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Explore the range online


View the full range of Van Gogh products on our website.

Commercial Centre



BIM Store objects

Render a Van Gogh floor into your project.























Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.



Explore the range online

View the full range of Van Gogh products on our website.

Wood	Gluedown product code	Name	Australian woods	High variation	Available in rigid core
	VGW81T	Country Oak			•
	VGW82T	Distressed Oak			•
	VGW84T	Birch			•
	VGW85T	French Oak			•
	VGW86T	Classic Oak			•
	VGW89T	Ebony			•
	VGW103T	Northern Spotted Gum	•	•	•
	VGW107T	Blush Oak			•
	VGW110T	Greige Oak			•
	VGW111T	Light Distressed Oak			•
	VGW112T	Misty Grey Oak			•
	VGW127T	Natural Maple			•
	VGW128T	Smoked Maple			•
	VGW129T	Washed Blackbutt	•		•
	VGW130T	Eastern Blackbutt	•		•
	VGW131T	River Spotted Gum	•	•	•
	VGW132T	Marron Elm			•
	VGW133T	Millstone Sycamore			•
	VGW134T	Nocturne Oak			•
	VGW135T	Tranquil Oak			•



Misty Grey Oak VGW112T



Millstone Sycamore VGW133T

Residential & Trade Centre




Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Van Gogh installation guide


Make the right start with our installation guide.



Acoustic performance


Explore flooring designed for quieter spaces.

Commercial Centre




Commercial warranty brochure

Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



Technical resources

View product, technical and performance information and tools.

Environmental accreditations

The Van Gogh range receives a GreenRate™ Level 'A' rating for quality sustainable building material, and LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, and maintaining environmentally friendly manufacturing processes.



All Karndean range and format credentials are at our certification policy level – please check for the current certification status.

	Standard	Gluedown result
Thickness	ISO 24346	3.0 mm
Wear layer	ISO 24340	0.5 mm
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Domestic	15 years wear Lifetime wear
Bevelled edge		Micro
Standards	ASTM F1700	Pass
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	AS/NZS 9239.1:2010	CRF: 7.3 kW/m ² Smoke Value: I24% min
Staining resistance	EN ISO 26987 / EN 423 ASTM F925	Excellent Pass
Light fastness	ISO 105-B02 ASTM F1515	Pass (≥7) Pass (<8)
Abrasion resistance	EN 660-2 ISO 10582 ASTM D3884	Group T Type I Pass
Flexibility	ISO 24344	Pass
Dimensional stability	EN 434/ISO 23999 ASTM F2199	Pass (≤0.25%) Pass
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL _W = 4 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN 433 / ISO 24343-1 ASTM F1914	Pass (≤0.1 mm) Pass (<8%)
Castor chair continuous use	EN 425	Pass
Thermal resistance	ISO 8302	0.0118 m ² K/W. Suitable for underfloor heating. Max 27°C
Slip resistance**	AS/NZS 4586:2013	R10
Adhesive	General use: High temperature:	Karndean Mega-Bond Karndean 8000 2-part Polyurethane
Environmental	GBCA / NZGBC GreenStar Rating System Floorscore SCS-EC10.3-2014 v4.0 Indoor Air Comfort Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	GreenRate Level 'A'; LCA Silver Plus; Best Practice PVC Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Sustainability Assessment for Resilient Floor Coverings; Conformance product Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

Van Gogh Wood

1219.2mm x 177.8mm (48" x 7")



Blush Oak **VGW107T**



Birch **VGW84T**



Tranquil Oak **VGW135T**



Washed Blackbutt **VGW129T**




Millstone Sycamore **VGW133T**



Eastern Blackbutt **VGW130T**



Natural Maple **VGW127T**

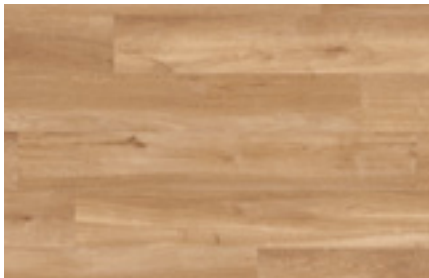

French Oak **VGW85T**

Van Gogh Wood

1220.0mm x 180.0mm (48.03" x 7.09")



Country Oak **VGW81T**



Light Distressed Oak **VGW111T**



Distressed Oak **VGW82T**




Greige Oak **VGW110T**



Misty Grey Oak **VGW112T**



Smoked Maple **VGW128T**

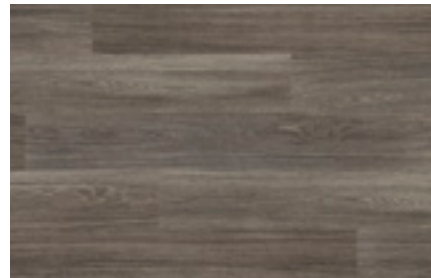

Nocturne Oak **VGW134T**



Ebony **VGW89T**

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Van Gogh Wood

1220.0mm x 180.0mm (48.03" x 7.09")



River Spotted Gum **VGW131T***



Northern Spotted Gum **VGW103T***



Classic Oak **VGW86T**



Marron Elm **VGW132T**



Eastern Blackbutt **VGW130T**



Blush Oak **VGW107T**



Natural Maple VGW127T



Washed Blackbutt VGW129T




Range Hub



Opus offers a modern, contemporary feel with designs in a wide range of colours to complement any commercial space. From the cool limed tones of Walnut to the warm, rich tones of Oak, the Opus range delivers simplicity and style for commercial interiors. The collection of stones feature fresh, contemporary natural stone effects, offering a clean, modern look. With options like the pale tones of Limestone and the bold, industrial feel of Concrete, the Opus collection brings a stylish, up-to-date touch to any commercial design scheme.


Key facts			
Thickness:	2.5mm	Bevel:	Micro
Plank sizes:	914.4mm x 152.4mm (36.0" x 6.0")	Box quantity:	3.345m ² / 24 planks
	1219.2mm x 228.6mm (48.0" x 9.0")		3.345m ² / 12 planks
Tile sizes:	457.2mm x 457.2mm (18.0" x 18.0")		3.345m ² / 16 tiles
	457.2mm x 609.6mm (18.0" x 24.0")		3.345m ² / 12 tiles
Wear layer:	0.5mm	Slip rating:	R10 & R11/P4

Residential & Trade Centre



Consumer brochures

Access our online brochures and take a deep dive into the Opus range.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Explore the range online


View the full range of Opus products on our website.

Commercial Centre



BIM Store objects

Render a Opus floor into your project.



Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.



Explore the range online

View the full range of Opus products on our website.

Wood	Product code	Name	P4 slip resistance	P4 product code	High variation
	WP311	Grano			
	WP312	Palleo			
	WP313	Ignea	•	WP313-SR	
	WP315	Aurum			
	WP316	Rubra			
	WP318	Carbo	•	WP318-SR	
	WP319	Talpa	•	WP319-SR	
	WP329	Bleached Grey Walnut	•	WP329-SR	
	WP411	Niveus	•	WP411-SR	
	WP413	Magna			
	WP414	Argen			
	WP421	Rubesco			
	WP422	Columba			
	WP423	Avena			

Stone	Product code	Name	P4 slip resistance	P4 product code	High variation
	SP111	Luna			
	SP114	Ombra			
	SP115	Nero			
	SP211	Mico			
	SP212	Terra			
	SP213	Urbus	•	SP213-SR	
	SP214	Forma			
	SP215	Ferra			
	SP216	Fumo			•
	SP217	Argento	•	SP217-SR	•



Bleached Grey Walnut WP329 | WP329-SR





Magna WP413

Residential & Trade Centre




Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Opus installation guide


Make the right start with our installation guide.



Acoustic performance


Explore flooring designed for quieter spaces.

Commercial Centre




Commercial warranty brochure

Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



Technical resources

View product, technical and performance information and tools.

Environmental accreditations

The Opus range receives a GreenRate™ Level 'A' rating for quality sustainable building material, and LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, and maintaining environmentally friendly manufacturing processes.



All Karndean range and format credentials are at our certification policy level – please check for the current certification status.

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Domestic	15 years wear Lifetime wear
Bevelled edge		Micro
Standards	ASTM F1700	Pass
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	AS/NZS 9239.1:2010	CRF: >11 kW/m ² Smoke value: 93% min.
Staining resistance	EN ISO 26987/EN 423 ASTM F925	Excellent Pass
Light fastness	ISO 105-B02 ASTM F1515	Pass (≥ 7) Pass (< 8)
Abrasion resistance	EN 660-2 ISO 10582 ASTM D3884	Group T Type I Pass
Flexibility	ISO 24344	Pass
Dimensional stability	EN 434/ISO 23999 ASTM F2199	Pass (≤ 0.25%) Pass
Acoustic impact noise reduction	EN ISO 717-2/EN ISO 140-8	ΔL _w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN 433/ISO 24343-1 ASTM F1914	Pass (≤0.1 mm) Pass (<8%)
Castor chair continuous use	EN 425/ISO 4918	Pass
Thermal resistance	ISO 8302	0.0097 m ² K/W Suitable for underfloor heating. Max 27°C
Slip resistance***	AS/NZS 4586:2013	R10/R11
Adhesive	General use: High temperature:	Karndean Mega-Bond Karndean 8000 2-part Polyurethane
Environmental	GBCA/NZGBC GreenStar Rating System Floorscore SCS-EC10.3-2014 v4.0 Indoor Air Comfort Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	GreenRate Level 'A'; LCA Silver Plus; Best Practice PVC Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification). Sustainability Assessment for Resilient Floor Coverings; Conformant product. Manufactured to quality and environment management systems standards.
Phthalate free		Yes
Recycling		Suitable

* Subject to terms. Please see our website.

** Result is L_{n,w} = 58 dB when installed on Regupol 4515 acoustic underlay.

*** Slip resistance is measured on ex-factory product. Slip resistance will be affected by surface contamination, use and how the product is maintained.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

Opus Wood

914.4mm x 152.4mm (36.0" x 6.0")



Grano **WP311**




Palleo **WP312**



Igneae **WP313 | WP313-SR (P4)**



Aurum **WP315**

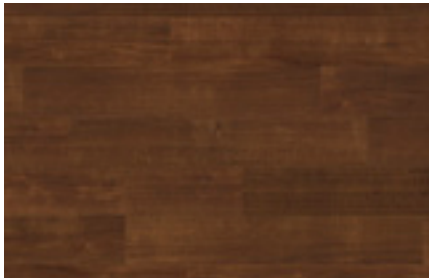

Rubra **WP316**



Carbo **WP318 | WP318-SR (P4)**



Talpa **WP319 | WP319-SR (P4)**



Bleached Grey Walnut **WP329 | WP329-SR (P4)**

Opus Wood

1219.2mm x 228.6mm (48" x 9.0")



Niveus **WP411 | WP411-SR (P4)**



Magna **WP413**



Argen **WP414**



Rubesco **WP421**



Columba **WP422**




Avena **WP423**

Opus Stone

457.2mm x 457.2mm (18.0" x 18.0")



Luna **SP111**

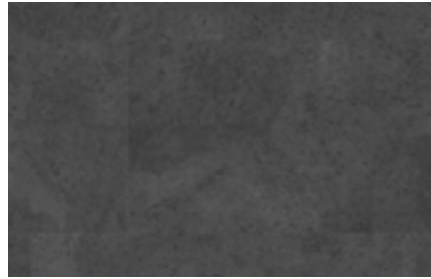

Ombra **SP114**



Nero **SP115**



Grano **WP311** and Carbo **WP318**

Opus Stone

457.2mm x 609.6mm (18.0" x 24.0")



Mico **SP211**



Terra **SP212**



Urbus **SP213 | SP213-SR (P4)**



Forma **SP214**




Ferra **SP215**



Fumo **SP216***



Argento **SP217***

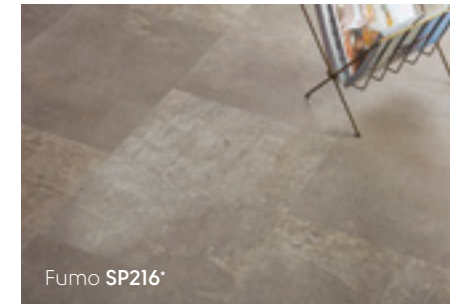

Fumo **SP216***

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.



Niveus WP411



Fumo SP216*

Range Hub

Knight Tile



The Knight Tile collection offers a versatile range of wood and stone designs for residential and light commercial spaces. The wood planks are crafted to reflect the natural grain of timber, with options like the cool tones of Coastline Oak, the mid-tones of Mid Limed Oak, and the bold dark hues of Shadow Studio Oak. The stone inspired designs feature a variety of looks, from classic pale to contemporary dark styles. It includes the timeless Grey Riven Slate, modern Honed Oyster Slate, and the striking Honed Charcoal Slate, providing designs that blend seamlessly into any interior style.

Key facts


Thickness:	2.0mm	Bevel:	No
Plank size:	1219.2mm x 177.8mm (48.0" x 7.0")	Wear layer:	0.3mm
Tile sizes:	304.8mm x 457.2mm (12.0" x 18.0")	Box quantity:	4.335m ² / 20 planks 3.345m ² / 24 tiles
		Slip rating:	Planks: R10 Tiles: R9

Knight Tile is a Dual Format range

See page 78 for our Knight Tile rigid core information

Residential & Trade Centre

Commercial Centre




Consumer brochures

Access our online brochures and take a deep dive into the Knight Tile range.




BIM Store objects

Render a Knight Tile floor into your project.



Floorstyle visualiser tool

Visualise Karndean vinyl planks in your own rooms.



Commercial Floorstyle visualiser tool

Visualise Karndean LVT flooring in your project.



Explore the range online

View the full range of Knight Tile products on our website.



Explore the range online

View the full range of Knight Tile products on our website.

Wood	Gluedown product code	Name	Australian woods	High variation	Available in rigid core
	KP94-7	Pale Limed Oak		•	•
	KP95-7	Rose Washed Oak		•	•
	KP96-7	Mid Limed Oak		•	•
	KP99-7	Lime Washed Oak		•	•
	KPI04-7	Light Worn Oak			•
	KPI05-7	White Painted Oak			•
	KPI38-7	Grey Limed Oak			•
	KPI41-7	Urban Spotted Gum	•		•
	KPI43-7	Blond Character Oak			•
	KPI44-7	Washed Character Oak			•
	KPI46-7	Traditional Character Oak			•
	KPI47-7	Coastline Oak			•
	KPI49-7	Classic Spotted Gum	•		•
	KPI50-7	Shadow Studio Oak			•
	KPI53-7	Nordic Limed Oak			•
	KPI57-7	Coastal Blackbutt	•	•	•
Stone	Gluedown product code	Name		High variation	Available in rigid core
	ST16	Grey Riven Slate			•
	ST17	Honed Oyster Slate			•
	ST19	Honed Charcoal Slate			•
	ST20	Honed Pebble Slate			•
	ST21	Dove Grey Concrete			•
	ST22	Smoked Concrete			•




Lime Washed Oak KP99-7




Urban Spotted Gum KPI41

Residential & Trade Centre




Warranty brochure

Discover comprehensive warranty protection for your customer's home.



Knight Tile installation guide


Make the right start with our installation guide.



Acoustic performance


Explore flooring designed for quieter spaces.

Commercial Centre




Commercial warranty brochure

Find out why our commercial warranty stands out from the rest.



Environmental Product Declaration

Independently verified EPDs. View, download & compare LCAs.



Technical resources

View product, technical and performance information and tools.

	Standard	Gluedown result
Thickness	ISO 24346	2.0 mm
Wear layer	ISO 24340	0.3 mm
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Domestic	10 years light commercial wear Lifetime wear
Bevelled edge		No
Standards	EN649/EN ISO 10582 ASTM F1700	Pass Pass
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	AS/NZS ISO 9239.1:2010	CRF: 8.1 kW/m ² Smoke value: 42% min
Staining resistance	EN ISO 26987/EN 423 ASTM F925	Excellent Pass
Light fastness	ISO 105-B02 ASTM F1515	Pass (≥6) Pass (<8)
Abrasion resistance	EN 660-2 ISO 10582 ASTM D3884	Group T Type 1 Pass
Flexibility	ISO 24344	Pass
Dimensional stability	EN 434/ISO 23999 ASTM F2199	Pass (≤0.25%) Pass
Acoustic impact noise reduction	EN ISO 717-2/EN ISO 140-8	ΔLw = 1 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN 433/ISO 24343-1 ASTM F1914	Pass (≤0.1 mm) Pass (<8%)
Castor chair continuous use	EN 425/ISO 4918	Pass
Thermal resistance	ISO 8302	0.0100 m ² K/W. Suitable for underfloor heating. Max 27°C
Slip resistance**	AS/NZS 4586:2013	Planks: R10 Tiles: R9
Adhesive	General use: High temperature: Floorscore SCS-EC10.3-2014 v4.0 Indoor Air Comfort Environmental Product Declaration ISO 14001 / ISO 9001 NSF/ANSI 332	Karndean Mega-Bond Karndean 8000 2-part Polyurethane Indoor air quality certified; Compliant low emitting VOC emissions. Gold certification; Compliant low emitting VOC emissions. Product-specific Type III EPD (products with external third-party verification) Manufactured to quality and environment management systems standards. Sustainability Assessment for Resilient Floor Coverings; Conformance product
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.

Knight Tile Wood

1219.2mm x 177.8mm (48" x7")



Pale Limed Oak **KP94-7***



Rose Washed Oak **KP95-7***



Mid Limed Oak **KP96-7***




Lime Washed Oak **KP99-7***




Light Worn Oak **KP104-7**



White Painted Oak **KP105-7**

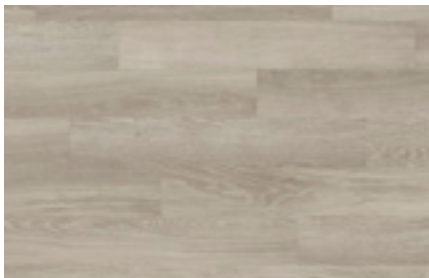

Grey Limed Oak **KP138-7**

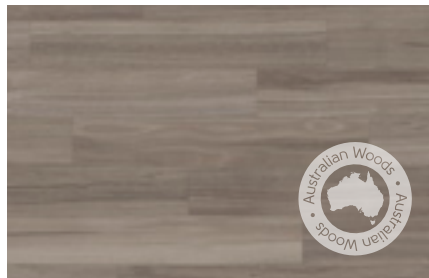

Urban Spotted Gum **KP141-7**



Knight Tile Wood

1219.2mm x 177.8mm (48" x7")



Blond Character Oak **KP143-7**



Washed Character Oak **KP144-7**



Traditional Character Oak **KP146-7**




Coastline Oak **KP147-7**




Classic Spotted Gum **KP149-7**



Shadow Studio Oak **KP150-7**

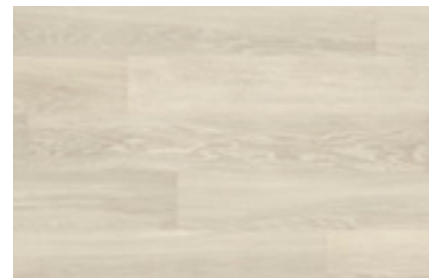

Nordic Limed Oak **KP153-7**

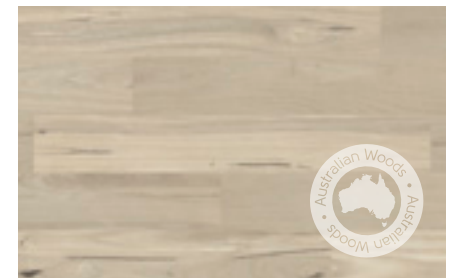

Coastal Blackbutt **KP157-7***



* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.



Nordic Limed Oak KPI53-7



Washed Character Oak KPI44-7

Knight Tile Stone

304.8mm x 457.2mm (12.0" x 18.0")



Grey Riven Slate **ST16**



Honed Charcoal Slate **ST19**



Dove Grey Concrete **ST21**



Honed Oyster Slate **ST17**



Honed Pebble Slate **ST20**



Smoked Concrete **ST22**



Grey Riven Slate **ST16**

Loose lay

Karndean LooseLay Longboard					
Product code	Name	Species	Australian woods	High variation	Range Hub page
LLP301	Twilight Oak	European Oak			30
LLP306	Pearl Oak	European Oak			30
LLP307	Neutral Oak	European Oak			30
LLP308	French Grey Oak	European Oak			30
LLP310	Champagne Oak	European Oak			30
LLP311	Bleached Tasmanian Oak	Australian Species	•		30
LLP312	Tasmanian Oak	Australian Species	•		30
LLP313	North Coast Blackbutt	Australian Species	•		30
LLP314	Embered Blackbutt	Australian Species	•		30
LLP316	Mountain Spotted Gum	Australian Species	•	•	30
LLP317	Lemon Spotted Gum	Australian Species	•	•	30
LLP325	Honey Ironbark	Australian Species	•		30
LLP328	Blended Ironbark	Australian Species	•		30
LLP329	Pure Fabric Oak	Character Oak		•	30
LLP352	Alpine Oak	White Oak			30
LLP353	Cashmere Oak	White Oak			30
LLP354	Sterling Oak	White Oak			30
LLP355	Wheat Oak	White Oak		•	30
LLP356	Field Oak	European Oak			30
LLP357	Pure Danish Oak	Danish Oak			30



Wheat Oak LLP355*

HIGH VARIATION
is a feature of this design

Karndean LooseLay Originals Wood				
Product code	Name	Species	High variation	Range Hub page
LLP92	Country Oak	Character Oak		40
LLP95	Ashland	White Oak		40
LLP102	Heritage Oak	Rustic Oak		40
LLP105	Vintage Timber	Rustic Oak		40
LLP108	Providence	White Oak		40
LLP109	Stamford	Rustic Oak	•	40
LLP112	Hartford	Rustic Oak	•	40
LLP113	Cambridge	Rustic Oak		40
LLP142	Sicilia	Character Oak		40
LLP146	Budelli	Limed Oak		40
LLP147	Lampione	European Oak		40
LLP148	Linosa	European Oak		40
LLP150	Levanzo	Limed Oak		40
LLP152	Waterbury	Limed Oak		40
LLP153	Brockton	European Oak		40
LLP154	Danbury	European Oak		40
LLP156	Hamden	Character Oak		40
LLP157	Bridgeport	European Oak		40

Karndean LooseLay Originals Stone				
Product code	Name	Species	High variation	Range Hub page
LLT201	Colorado	Pietra		40
LLT203	Madison	Honed Limestone		40
LLT208	Tino	Honed Limestone		40
LLT209	Capri	Honed Limestone		40
LLT210	Nisida	Concrete		40
LLT211	Vulcano	Concrete		40
LLT212	Dakota	Concrete		40
LLT213	Maine	Concrete		40
LLT216	Utah	Pietra		40
LLT217	Vermont	Pietra		40
LLT218	Ontario	Concrete		40
LLT219	Quebec	Concrete		40



Hamden LLP156

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Rigid core 

Korlok Wood				
Product code	Name	Australian woods	High variation	Range Hub page
RKP8101	Baltic Washed Oak			56
RKP8103	Warm Ash		•	56
RKP8105	Texas White Ash		•	56
RKP8110	Antique French Oak			56
RKP8116	Canadian Urban Oak			56
RKP8118	Warm Spotted Gum	•	•	56
RKP8119	Weathered Spotted Gum	•	•	56
RKP8207	Light Barnwood		•	56
RKP8239	Light Spotted Gum	•	•	56
RKP8240	Natural Blue Gum	•	•	56
RKP8241	Bisque Ash		•	56
RKP8242	Golden Ash		•	56
RKP8243	Limed Loire Oak			56
RKP8244	Grey Loire Oak			56
RKP8245	Pale Loire Oak			56
RKP8246	Natural Fiddleback Blackbutt	•		56
RKP8247	Refined Fiddleback Blackbutt	•		56
RKP8248	Mountain Hickory			56



Korlok Stone			
Product code	Name	High variation	Range Hub page
RKT2410	Pebble Grey		56
RKT2413	Palazzo Marble	•	56
RKT2414	Mezzo Perla		56
RKT2417	Grey Castello Marble		56
RKT2423	Venetian Slate		56
RKT3018	Tortora Breccia Marble		56
RKT3020	Luna Breccia Marble		56
RKT3021	Bianco Breccia Marble		56



* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Rigid core 

Van Gogh Wood					
Product code	Name	Australian woods	High variation	Available in gluedown	Range Hub page
SCB-VGW81T	Country Oak			•	70
SCB-VGW82T	Distressed Oak			•	70
SCB-VGW84T	Birch			•	70
SCB-VGW85T	French Oak			•	70
SCB-VGW86T	Classic Oak			•	70
SCB-VGW89T	Ebony			•	70
SCB-VGW103T	Northern Spotted Gum	•	•	•	70
SCB-VGW107T	Blush Oak			•	70
SCB-VGW110T	Greige Oak			•	70
SCB-VGW111T	Light Distressed Oak			•	70
SCB-VGW112T	Misty Grey Oak			•	70
SCB-VGW127T	Natural Maple			•	70
SCB-VGW128T	Smoked Maple			•	70
SCB-VGW129T	Washed Blackbutt	•		•	70
SCB-VGW130T	Eastern Blackbutt	•		•	70
SCB-VGW131T	River Spotted Gum	•	•	•	70
SCB-VGW132T	Marron Elm			•	70
SCB-VGW133T	Millstone Sycamore			•	70
SCB-VGW134T	Nocturne Oak			•	70
SCB-VGW135T	Tranquil Oak			•	70



Washed Blackbutt VGW129T


Knight Tile Wood					
Product code	Name	Australian woods	High variation	Available in gluedown	Range Hub page
SCB-KP94	Pale Limed Oak		•	•	78
SCB-KP95	Rose Washed Oak		•	•	78
SCB-KP96	Mid Limed Oak		•	•	78
SCB-KP99	Lime Washed Oak		•	•	78
SCB-KP104	Light Worn Oak			•	78
SCB-KP105	White Painted Oak			•	78
SCB-KP138	Grey Limed Oak			•	78
SCB-KP141	Urban Spotted Gum	•		•	78
SCB-KP143	Blond Character Oak			•	78
SCB-KP144	Washed Character Oak			•	78
SCB-KP146	Traditional Character Oak			•	78
SCB-KP147	Coastline Oak			•	78
SCB-KP149	Classic Spotted Gum	•		•	78
SCB-KP150	Shadow Studio Oak			•	78
SCB-KP153	Nordic Limed Oak			•	78
SCB-KP157	Coastal Blackbutt	•	•	•	78

Knight Tile Stone				
Product code	Name	High variation	Available in gluedown	Range Hub page
SCB-ST16-18	Grey River Slate		•	78
SCB-ST17-18	Honed Oyster Slate		•	78
SCB-ST19-18	Honed Charcoal Slate		•	78
SCB-ST20-18	Honed Pebble Slate		•	78
SCB-ST21-18	Dove Grey Concrete		•	78
SCB-ST22-18	Smoked Concrete		•	78



Nordic Limed Oak KPI53 | KPI53-7

Art Select Wood		
Product code	Name	Range Hub page
EW01	Hickory Paprika	90
EW02	Hickory Peppercorn	90
EW03	Hickory Nutmeg	90
HC01	Dawn Oak	90
HC02	Morning Oak	90
HC03	Dusk Oak	90
HC04	Sundown Oak	90
HC05	Evening Oak	90
HC06	Midnight Oak	90
RL01	Spring Oak	90
RL02	Summer Oak	90
RL03	Autumn Oak	90
RL04	Winter Oak	90
AP01	Blond Oak	90
AP02	Auburn Oak	90
AP03	Black Oak	90

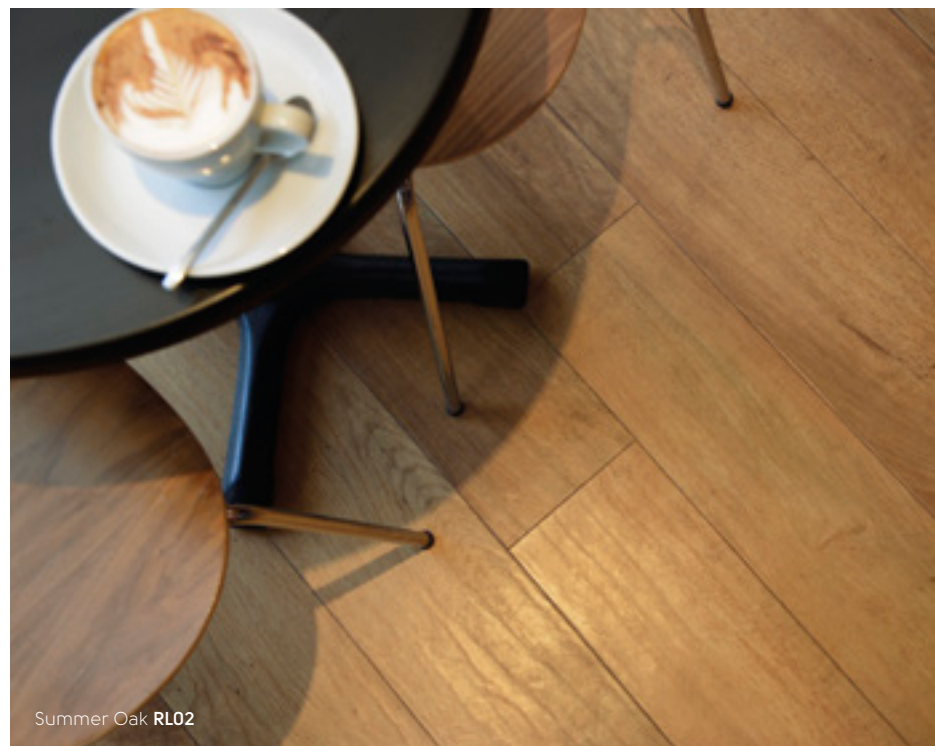

Summer Oak **RL02**


Van Gogh Wood					
Product code	Name	Australian woods	High variation	Available in rigid core	Range Hub page
VGW81T	Country Oak			•	100
VGW82T	Distressed Oak			•	100
VGW84T	Birch			•	100
VGW85T	French Oak			•	100
VGW86T	Classic Oak			•	100
VGW89T	Ebony			•	100
VGW103T	Northern Spotted Gum	•	•	•	100
VGW107T	Blush Oak			•	100
VGW110T	Greige Oak			•	100
VGW111T	Light Distressed Oak			•	100
VGW112T	Misty Grey Oak			•	100
VGW127T	Natural Maple			•	100
VGW128T	Smoked Maple			•	100
VGW129T	Washed Blackbutt	•		•	100
VGW130T	Eastern Blackbutt	•		•	100
VGW131T	River Spotted Gum	•	•	•	100
VGW132T	Marron Elm			•	100
VGW133T	Millstone Sycamore			•	100
VGW134T	Nocturne Oak			•	100
VGW135T	Tranquil Oak			•	100



Blush Oak **VGW107T**

Opus Wood					
Product code	Name	P4 slip resistance	P4 product code	High variation	Range Hub page
WP311	Grano				110
WP312	Palleo				110
WP313	Ignea	•	WP313-SR		110
WP315	Aurum				110
WP316	Rubra				110
WP318	Carbo	•	WP318-SR		110
WP319	Talpa	•	WP319-SR		110
WP329	Bleached Grey Walnut	•	WP329-SR		110
WP411	Niveus	•	WP411-SR		110
WP413	Magna				110
WP414	Argen				110
WP421	Rubesco				110
WP422	Columba				110
WP423	Avena				110

Opus Stone					
Product code	Name	P4 slip resistance	P4 product code	High variation	Range Hub page
SP111	Luna				110
SP114	Ombra				110
SP115	Nero				110
SP211	Mico				110
SP212	Terra				110
SP213	Urbus	•	SP213-SR		110
SP214	Forma				110
SP215	Ferra				110
SP216	Fumo			•	110
SP217	Argento	•	SP217-SR	•	110

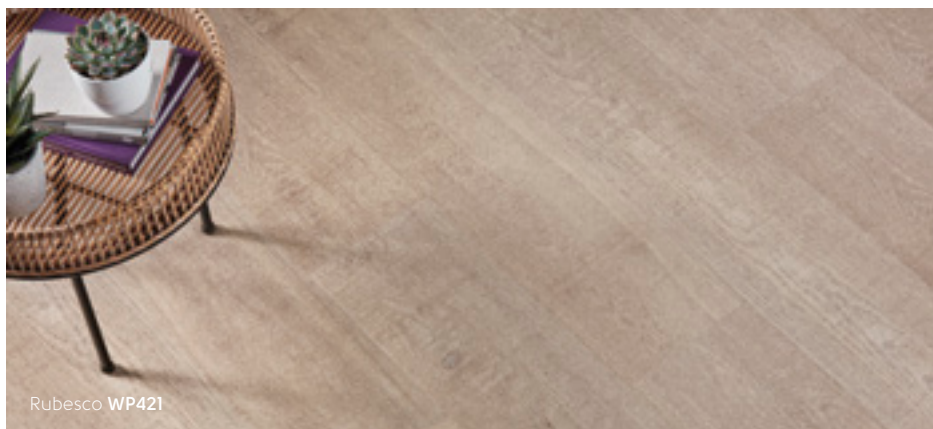

Knight Tile Wood					
Product code	Name	Australian woods	High variation	Available in rigid core	Range Hub page
KP94-7	Pale Limed Oak		•	•	120
KP95-7	Rose Washed Oak		•	•	120
KP96-7	Mid Limed Oak		•	•	120
KP99-7	Lime Washed Oak		•	•	120
KPI04-7	Light Worn Oak			•	120
KPI05-7	White Painted Oak			•	120
KPI38-7	Grey Limed Oak			•	120
KPI41-7	Urban Spotted Gum	•		•	120
KPI43-7	Blond Character Oak			•	120
KPI44-7	Washed Character Oak			•	120
KPI46-7	Traditional Character Oak			•	120
KPI47-7	Coastline Oak			•	120
KPI49-7	Classic Spotted Gum	•		•	120
KPI50-7	Shadow Studio Oak			•	120
KPI53-7	Nordic Limed Oak			•	120
KPI57-7	Coastal Blackbutt	•	•	•	120

Knight Tile Stone				
Product code	Name	High variation	Available in rigid core	Range Hub page
ST16	Grey Riven Slate		•	120
ST17	Honed Oyster Slate		•	120
ST19	Honed Charcoal Slate		•	120
ST20	Honed Pebble Slate		•	120
ST21	Dove Grey Concrete		•	120
ST22	Smoked Concrete		•	120





Karndeans
COMMERCIAL



Customer portal

Account number:

Business manager:

Portal username:

Portal password:



Imagery and Design Reproduction

Photography and print cannot always produce a perfect representation of our products. This includes colour, pattern variation and installation elements used. For this reason we strongly recommend obtaining a product sample and where possible viewing a larger sample in-store. We also recommend visiting our website for information on installation, after care and product selection. We love developing new ideas and improving on our existing designs which means that sometimes products are withdrawn at short notice. We hate to disappoint and will work with you to find an alternative design. Please contact Customer Service for more information. It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area. All Karndeans range and format credentials are at our certification policy level – please check for the current certification status

Contact us

Phone: 1800 331 170*
Email: customerservice@karndeans.com.au

Web: karndeans.com
karndeanscommercial.com

Address: 835 Stud Road Knoxfield,
Victoria 3180, Australia



*Calls may be recorded for training and quality purposes.