

# OPUS

Our Opus collection brings you a fresh, modern feel. The wide range of colour tones and mix of surface finishes combined with clean lines means you can achieve a sense of simplicity and visual space whatever your colour scheme.

Karndean 

# IT'S A NEW DAY

AND WE'RE COMMITTED TO  
CREATING A BETTER TOMORROW.

Karndean Evolve® is not only about the planet, but it's about the people too. Six focus areas drive us forward.

**01**  
Confronting  
climate change


**02**  
Health and  
wellbeing


**03**  
Sustainable use  
of resource


**04**  
Diversity and  
inclusion


**05**  
Supply chain  
transparency


**06**  
Education

 **Guaranteed quality**  
Our factories are ISO 9001 certified


 **Environmental responsibility**  
ISO 14001 certified for sustainable practices

 **Transparency**  
Third-party verified, product  
and region specific EPDs

 **Recycled material**  
Up to 50% recycled material  
in the backing layers


 **Long lasting, lower impact**  
Durable, high quality flooring reduces  
the need for replacement

 **Low VOCs**  
Eurofins Indoor Air Comfort (Gold) certified

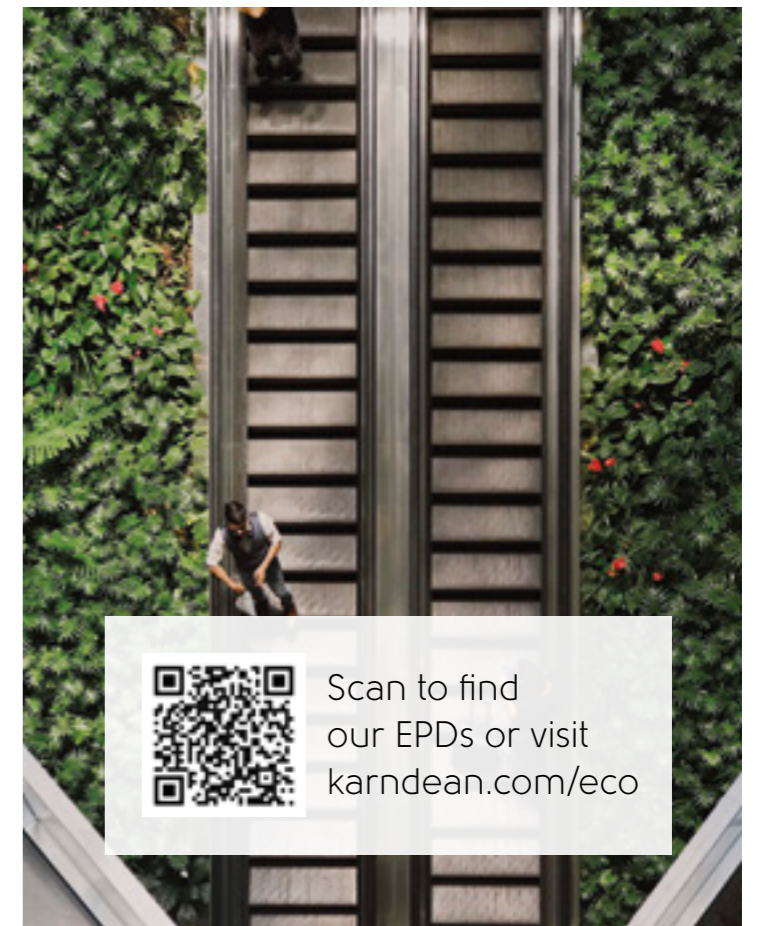




Fabrica **WP419** with DS10 3mm design strip

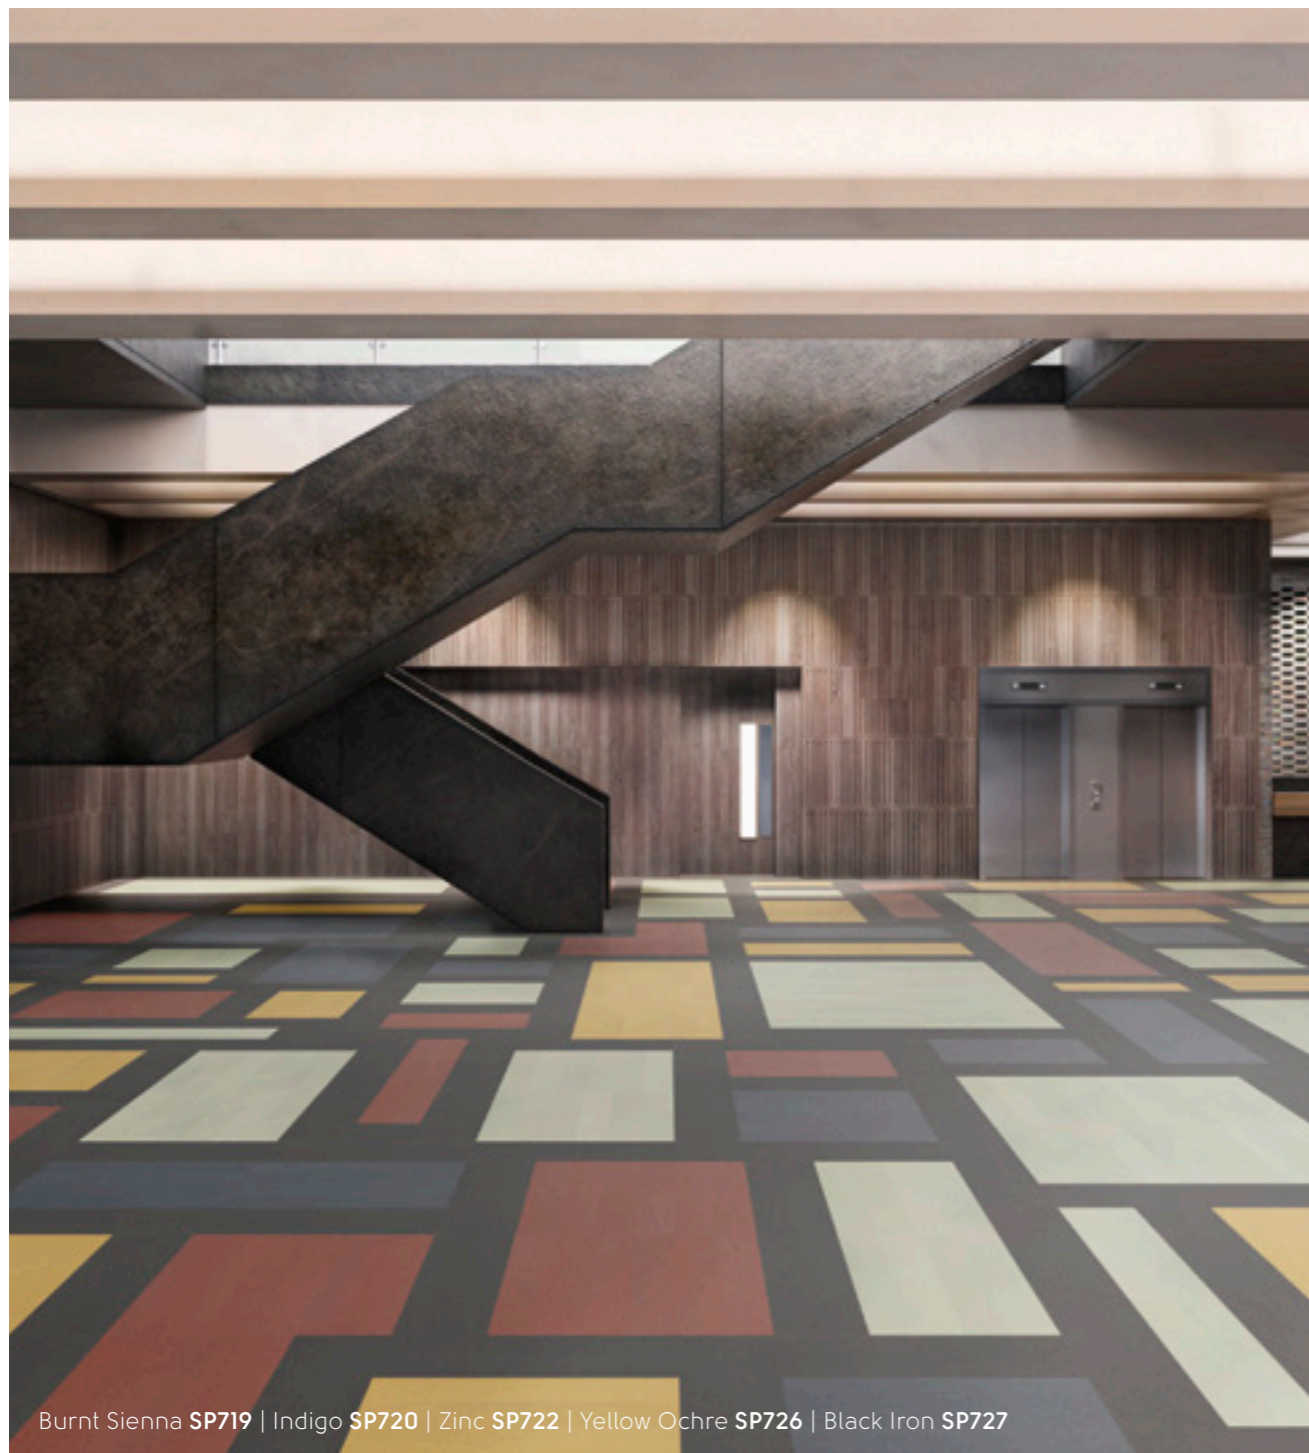


Burnt Sienna **SP719** | Indigo **SP720** | Zinc **SP722** | Yellow Ochre **SP726** | Black Iron **SP727**

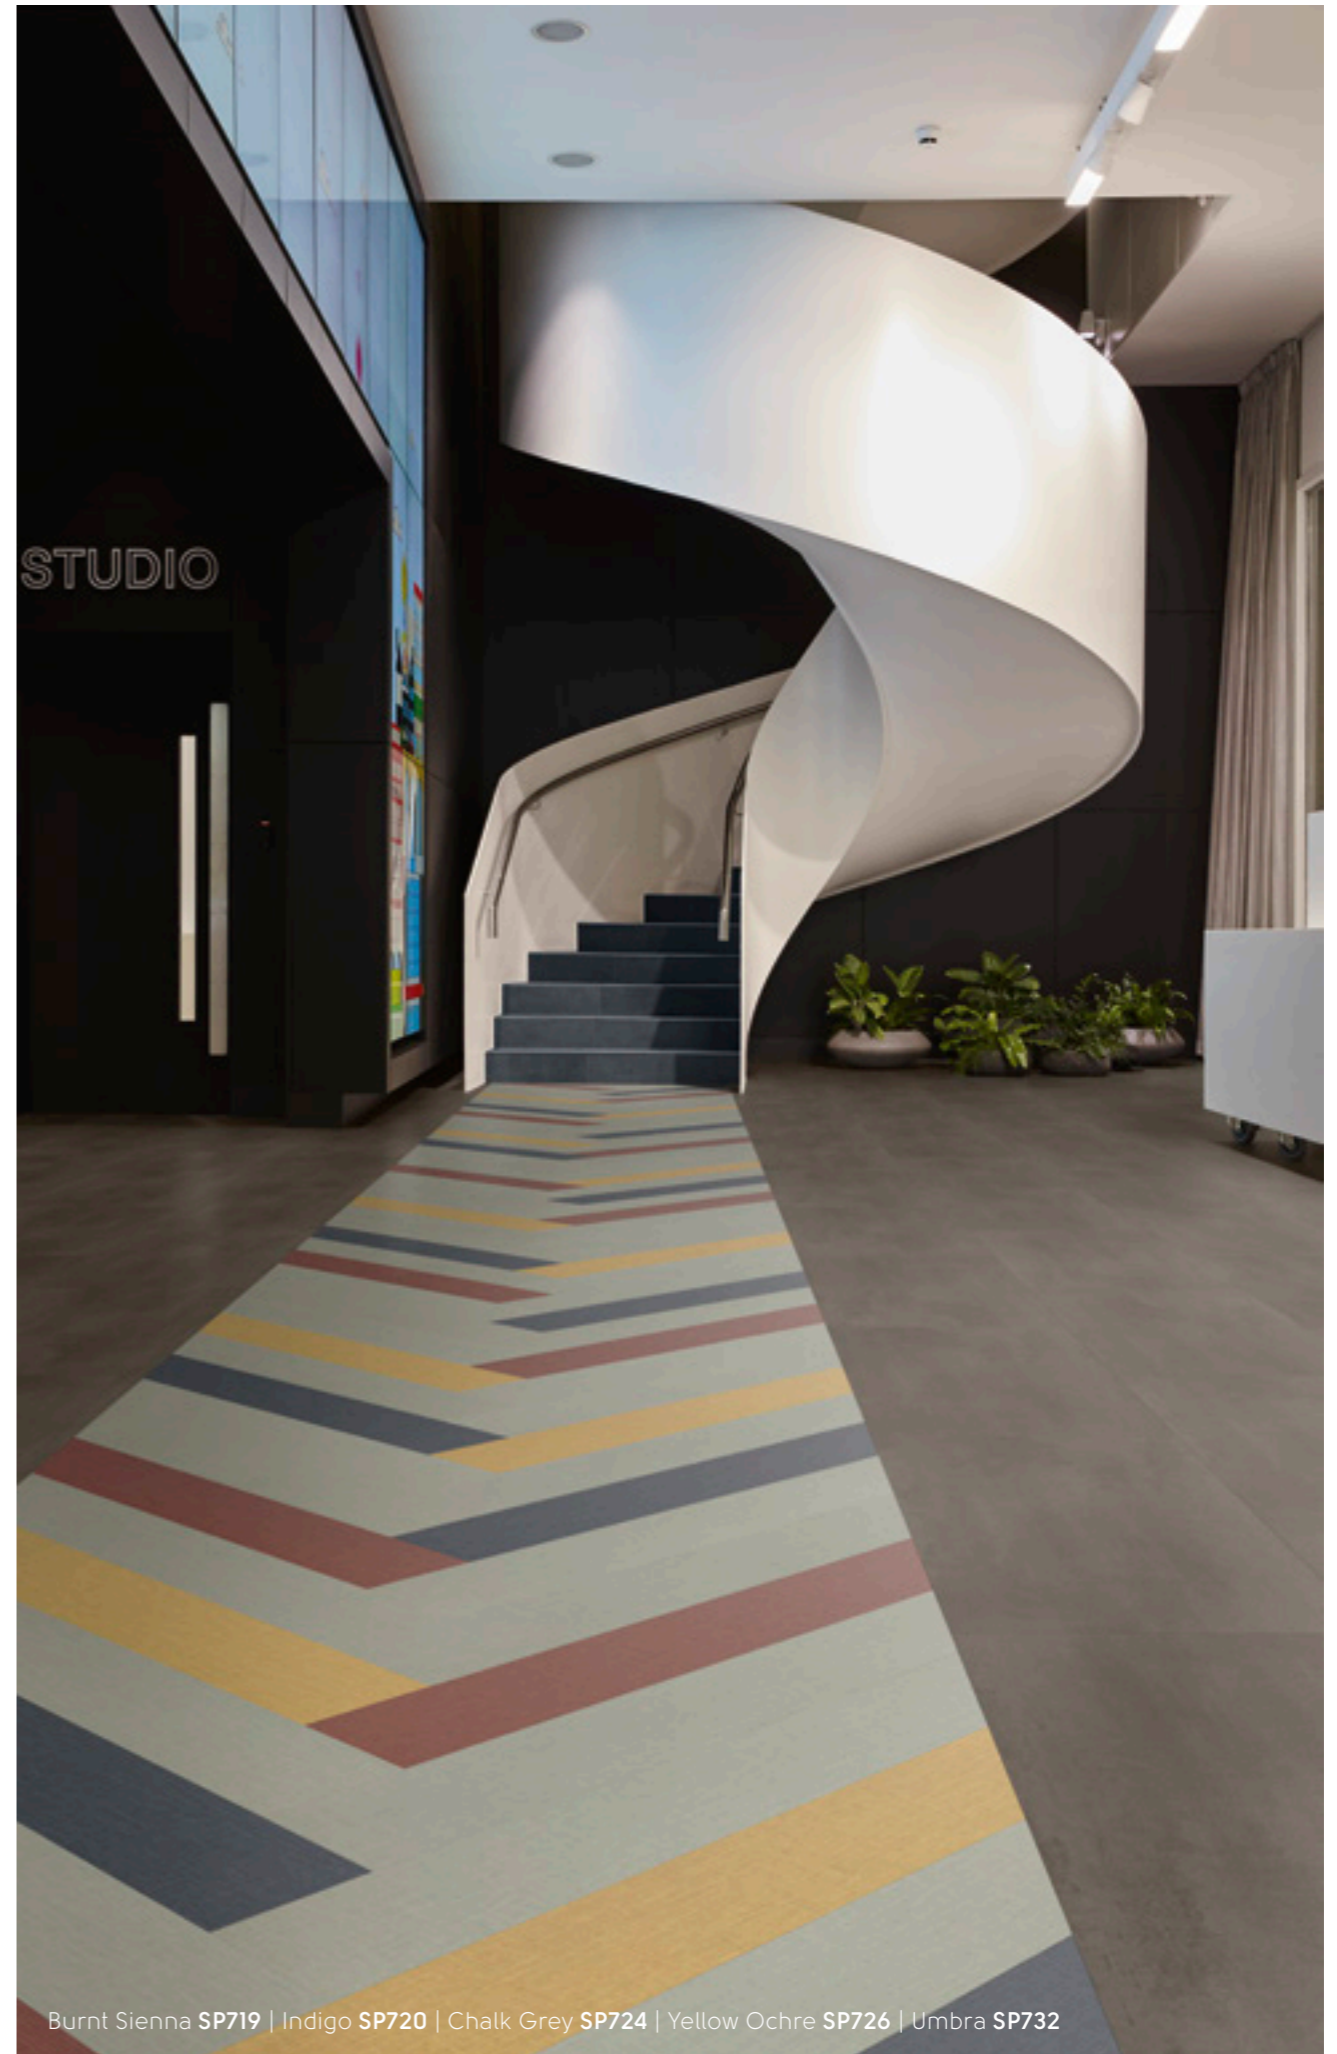

Burnt Sienna **SP719** | Indigo **SP720** | Chalk Grey **SP724** | Yellow Ochre **SP726** | Umbra **SP732**

1219mm x 228mm (48" x 9")

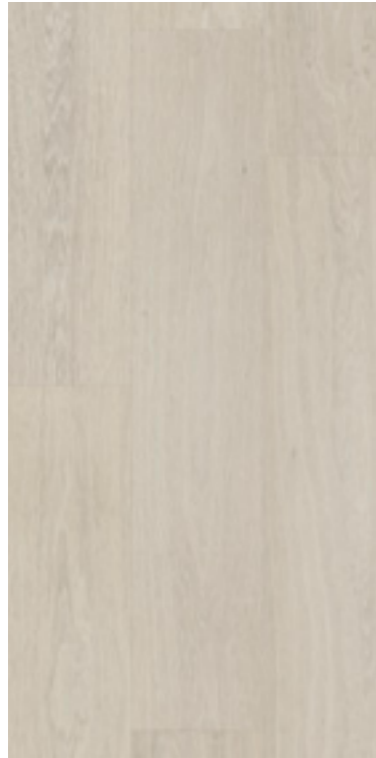


Columba **WP422 | WP422-SR** 




Fabrica **WP419**




Avena **WP423 | WP423-SR** 

1219mm x 228mm (48" x 9")



Niveus **WP411 | WP411-SR** 




Primo **WP412 | WP412-SR** 



Pallida **WP418**



Magna **WP413 | WP413-SR** 



Argen **WP414**

915mm x 152mm (36" x 6")



Grano **WP311**



Cera **WP314**




Ignea **WP313 | WP313-SR** 

Modern and designed to last, the Opus Enhance range was conceived with commercial specifications in mind, with enhanced finish and rougher surface texture. All products have an improved slip resistance of 36 and above, assessed using a pendulum wet test. The line features a stylish selection of contemporary greys and sleek designs, all supported by a 15 year commercial guarantee and 0.55mm wear layer.




915mm x 152mm (36" x 6")

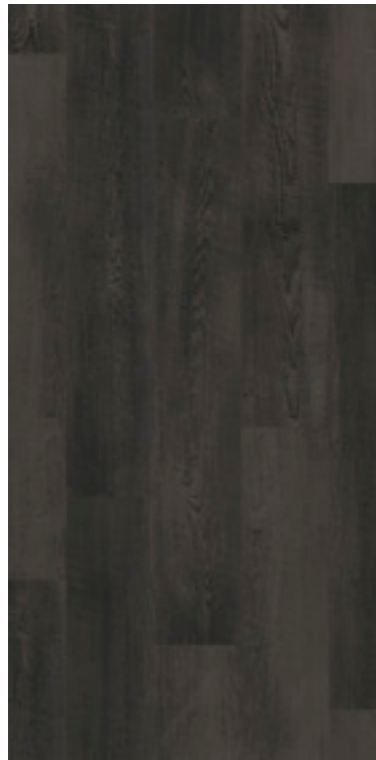

Carbo **WP318** | **WP318-SR** 

915mm x 102mm (36" x 4")

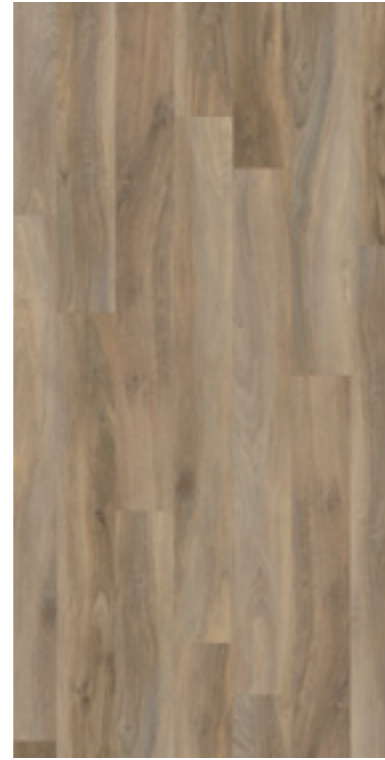

Weathered Elm **REN113**

457mm x 457mm (18" x 18")




Luna **SP111**




Nero **SP115**

76mm x 457mm (3" x 18")

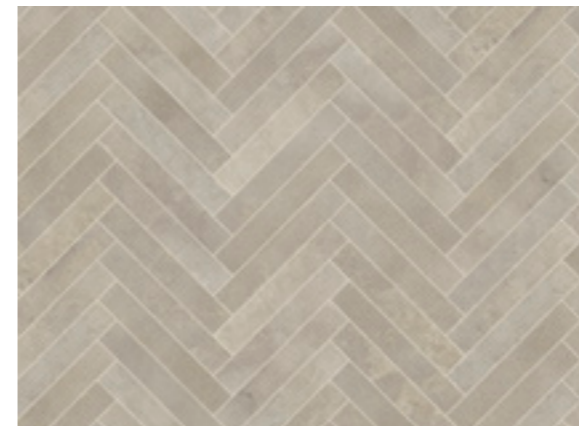

Argento **SM-SP217**

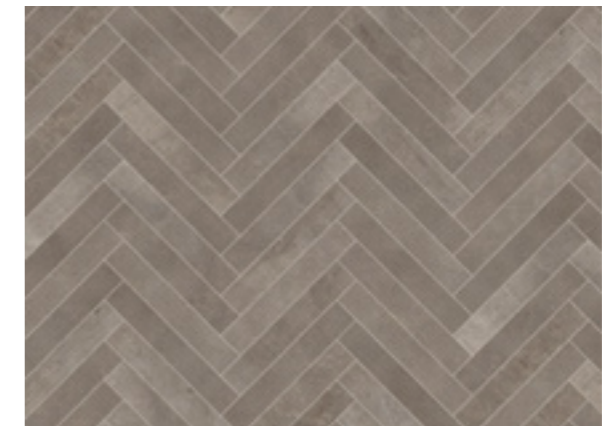

Fumo **SM-SP216**



Carbo **WP318** | Grano **WP311**




Mico **SP211**




Terra **SP212**




Argento **SP217 | SP217-SR** 



Fumo **SP216 | SP216-SR** 



Urbus **SP213 | SP213-SR** 



Modern and designed to last, the Opus Enhance range was conceived with commercial specifications in mind, with enhanced finish and rougher surface texture. All products have an improved slip resistance of 36 and above, assessed using a pendulum wet test. The line features a stylish selection of contemporary greys and sleek designs, all supported by a 15 year commercial guarantee and 0.55mm wear layer.

457mm x 915mm (18" x 36")



Stratus **SP731**



San Marco **SP729**




Zinc **SP723 | SP722\***



Chalk Grey **SP725 | SP724\***



Interseco **SP736**

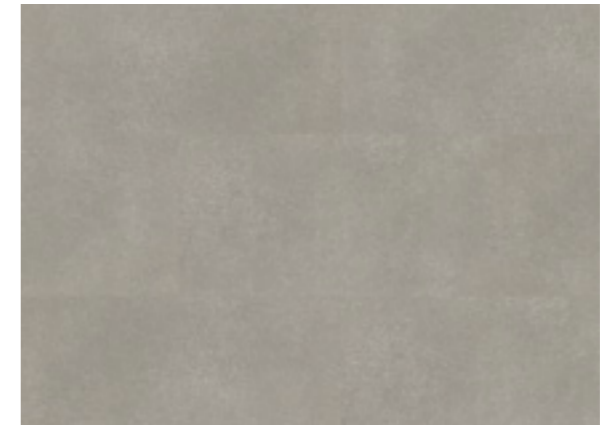

Industria **SP738**



Urbus **SP213** and Terra **SP212**



Concrete **SP739**



Leoncini **SP730**

\* These products are also available in 152mm x 915mm

457mm x 915mm (18" x 36")



Contarini **SP734**



Tizina **SP735**



Umbra **SP732**



Statera **SP737**



Black Iron **SP728 | SP727\***




Black Iron **SP727** San Marco **SP729** Stratus **SP731**

\* These products are also available in 152mm x 915mm


457mm x 457mm (18" x 18")




Dalmata **SP121**

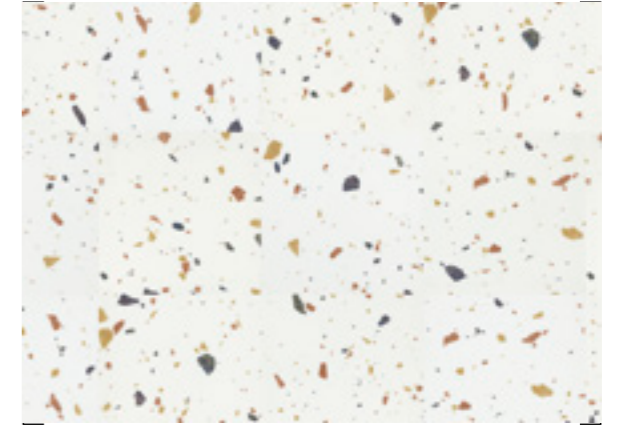

Salute Blanco **SP122**

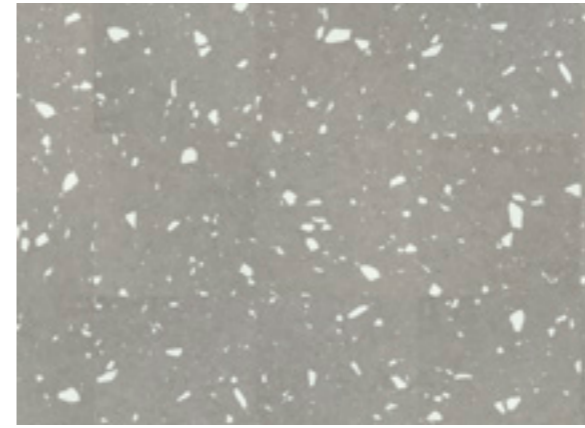

Pleta **SP120**

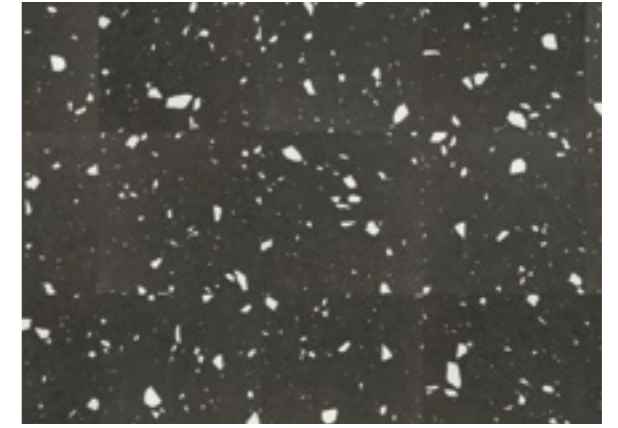


Dolce **SP119**




Yellow Ochre **SP726**



Amber **SP721**

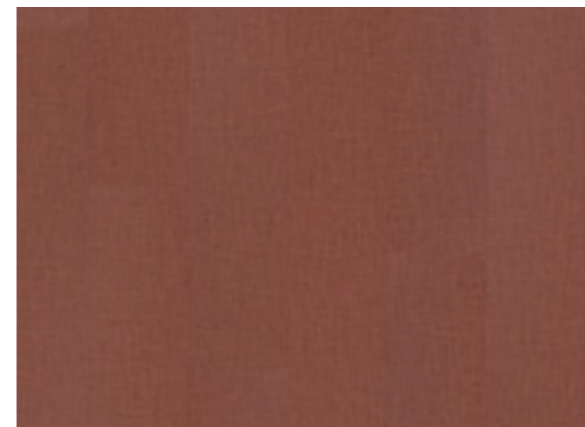

Burnt Sienna **SP719**

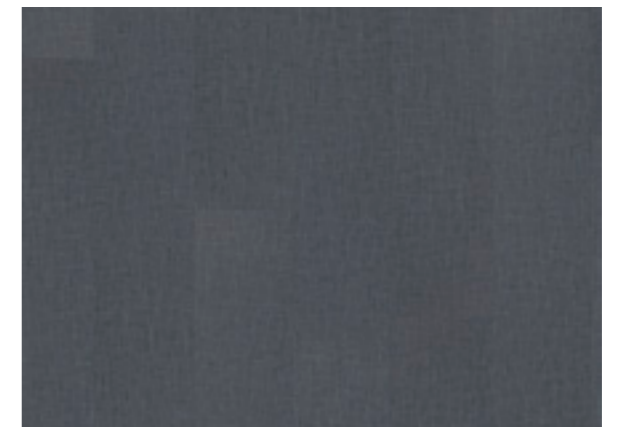

Indigo **SP720**



Yellow Ochre SP726 | Tizina SP735



Salute Bianco SP122



Burnt Sienna SP719 | Chalk Grey SP725 | Dalmata SP121



# TECHNICAL SPECIFICATION

	Standard	Result
<b>Size</b>	EN ISO 24342	914.4mm x 152.4mm (36" x 6")
		1219.2mm x 228.6mm (48" x 9")
		914.4mm x 101.6mm (36" x 4")
		457.2mm x 457.2mm (18" x 18")
		457.2mm x 609.6mm (18" x 24")
		457.2mm x 914.4mm (18" x 36")
		457.2mm x 76.2mm (3" x 18")
152.4mm x 914.4mm (6" x 36")		
<b>Thickness</b>	EN ISO 24346	2.5 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Guarantee<sup>1</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime guarantee
<b>Bevelled edge</b>		Micro
<b>Mass per unit area</b>	EN ISO 23997	4398 g/m <sup>2</sup>   4270 g/m <sup>2</sup> (Opus Enhance only)
<b>Standards</b>	EN 649 / EN ISO 10582	Pass
<b>Classification</b>	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987 / EN 423	Excellent
<b>Abrasion resistance</b>	EN 649 EN ISO 10582	Group T Type I
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN 434/EN ISO 23999	Pass (≤ 0.25%)
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥6) (Opus Enhance only)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN 433 / EN ISO 24343-1	Pass (≤0.1 mm)
<b>Castor chair continuous use</b>	EN 425 / EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0097 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 DIN 51130 BS7976	DS R10 (Opus Enhance: see website details) >36 (Opus Enhance only)
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD.
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product.
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.





2.5mm | 0.55mm

Karndean 



[karndeancommercial.com](http://karndeancommercial.com)

Karndean Designflooring, Crab Apple Way,  
Vale Park, Evesham, Worcestershire, WR11 1GP

 **Karndean  
Designflooring**

Karndean Designflooring - Commercial  
Call: 0044 (0)1386 820100  
Email: [commercial@karndean.co.uk](mailto:commercial@karndean.co.uk)  
For ROI call: 01 6569887

KD8279UK | COMOPPRES1