



KORLOK REGENT

Taking inspiration from the regal grandeur of royal palaces, the Korlok Regent collection offers an exquisite selection of timeless floors in a cutting-edge rigid core format and an array of laying patterns. A pre-attached acoustic backing eliminates the need for a separate underlay and reduces noise transfer to rooms below. With easy installation and the ability to fit over most existing subfloors, effortless luxury can be achieved while reducing business downtime.

Karndean 

INTRODUCING KORLOK REGENT COLLECTION

Designed with inspiration from the regal grandeur of royal palaces, this collection brings an exquisite selection of timeless floors in four beautifully crafted laying patterns.

In cutting-edge rigid core technology, Korlok Regent features six decadent oak designs capturing the beauty of nature found in London's glorious parks & gardens.



Effortless Peace of Mind

Completely waterproof, simple to clean, and reinforced by a lifetime guarantee* for complete peace of mind.



Effortless Tranquility

Reduce noise transfer to rooms below by 17dB, creating a sense of calm and serenity.



Effortless Transformation

Installs quickly, even over existing hard floors. Beautifully simple click-locking mechanism.**



Effortless Luxury

A perfect combination of form and function. Timeless, elegant design achieved through cutting-edge rigid core technology.



Exquisitely Embossed:

To ensure each plank is inherently unique and thereby accentuating the natural aesthetics of the wood, our Korlok Regent designs have been finished with a highly realistic emboss.



Greenwich Oak RKP9002

* Please refer to technical specification.
** Please see product installation guidelines for further information on the drop-lock installation systems.



TECHNICAL SPECIFICATION

	Standard	Result
Size	EN ISO 24342	See individual swatches overleaf for details
Thickness	EN ISO 24346	8.0 mm
Wear layer	EN ISO 24340	0.55 mm
Locking mechanism ¹		i4F drop-lock technologies ¹
Surface treatment		K-Guard+® PU coating
Guarantee ²	Commercial Residential	15 years Lifetime guarantee
Bevelled edge		Micro
Mass per unit area	EN ISO 23997	8860 g/m ²
Standards	EN ISO 20326	Pass
Classification	EN 685 / EN ISO 10874: Commercial Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B _{fl} -s ₁
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Locking strength	EN ISO 20326 Annex D	Pass (≥2.0 kN/m)
Furniture chair leg	EN ISO 16581	Pass (no visible damage)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL _w = 17 dB
Indentation - residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	EN ISO 4918	Pass (25000 cycles)
Thermal resistance	EN 12664	0.074 m ² K/W Suitable for underfloor heating Max 27°C
Slip resistance ³	EN 13893 DIN 51130	DS R10
Adhesive		None required. Please install according to our installation guidelines
Environmental	Indoor Air Comfort ISO 14001 / ISO 9001	Gold certification; Compliant low emitting VOC emissions Manufactured to quality and environment management systems standard
Recycling		Suitable
Phthalate free		Yes


¹ These products utilise proprietary 3L Triplelock® and I4F Technology www.patents-i4f.com

² Subject to terms. Please see our website.

³ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

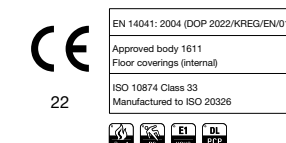


CHOOSE YOUR LAYING PATTERN

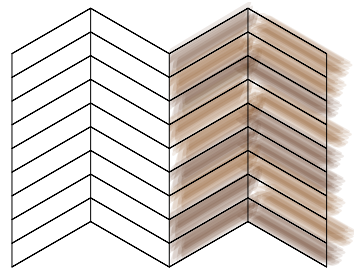

LARGE CHEVRON

1074.9mm x 214.9mm
(42.32" x 8.46")


Embodying grandeur, the large chevron design is suited to wide, open spaces. Offering a classic design inspired by traditional parquet in a large format ensures that an opulent look and feel can be achieved.

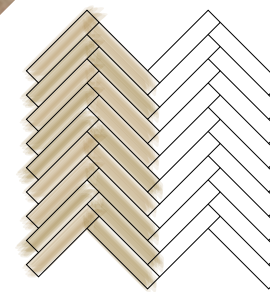

HERRINGBONE

720.1mm x 119.9mm
(28.35" x 4.75")



Perfect for introducing stylish elegance, Korlok Regent's herringbone lends itself to a wide range of commercial environments. Available in a 720.1mm x 119.9mm size, these planks allow for a more opulent feel in larger areas, so that specification requirements can be met without compromising on design.

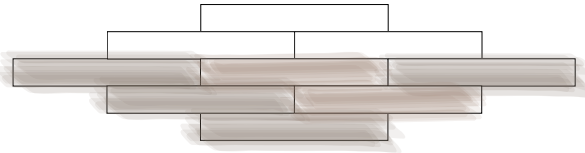

LARGE PLANK

1510.0mm x 220.0mm
(59.45" x 8.66")

Achieve timeless simplicity with our extra large 1.5m plank. Creating effortless minimalism and a sense of space and scale, these planks make a statement in any interior. With our click-locking mechanism, extra large format, and limited subfloor preparation requirements, faster installation times can be easily achieved.

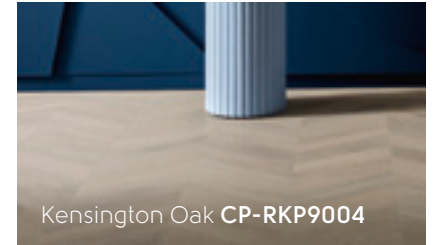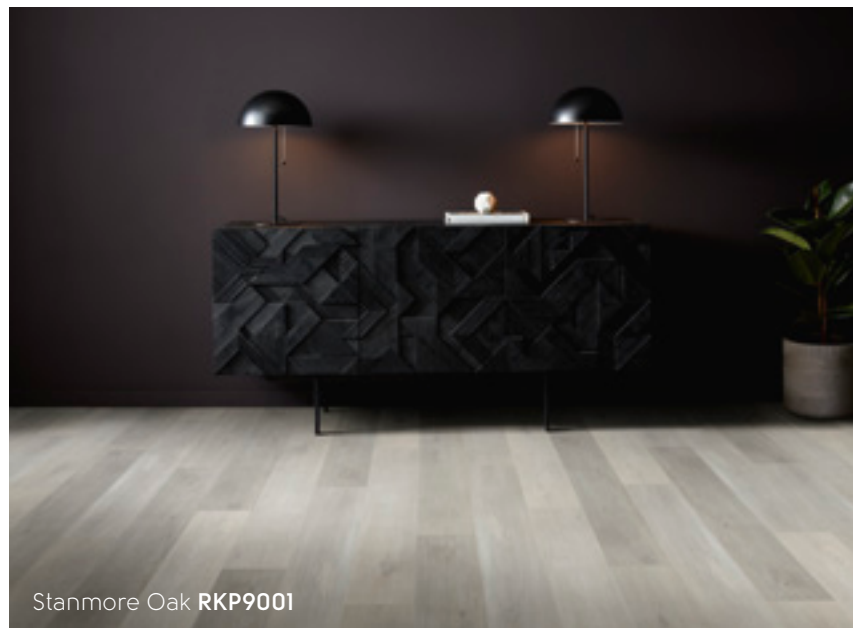

CHEVRON

938.5mm x 305.1mm
(36.95" x 12.01")

Inject a feeling of movement and visual interest with this sophisticated chevron pattern. Specify in smaller areas to give the illusion of space, while instilling clean lines and striking angles. Presented as a 938.5mm x 305.1mm multi-chevron plank, reproducing this regal pattern can be accomplished in much shorter time frames.

CHOOSE YOUR DESIGN

1074.9mm x 214.9mm (42.32" x 8.46") | 720.1mm x 119.9mm (28.35" x 4.72")
1510.0mm x 220.0mm (59.45" x 8.66") | 938.5mm x 305.1mm (36.95" x 12.01")

1074.9mm x 214.9mm (42.32" x 8.46") | 720.1mm x 119.9mm (28.35" x 4.72")
1510.0mm x 220.0mm (59.45" x 8.66") | 938.5mm x 305.1mm (36.95" x 12.01")



Stanmore Oak
CL-RKP9001 | SM-RKP9001 | RKP9001 | CP-RKP9001



Kensington Oak
CL-RKP9004 | SM-RKP9004 | RKP9004 | CP-RKP9004



Greenwich Oak
CL-RKP9002 | SM-RKP9002 | RKP9002 | CP-RKP9002



Victoria Oak
CL-RKP9005 | SM-RKP9005 | RKP9005 | CP-RKP9005

1074.9mm x 214.9mm (42.32" x 8.46") | 720.1mm x 119.9mm (28.35" x 4.72")
1510.0mm x 220.0mm (59.45" x 8.66") | 938.5mm x 305.1mm (36.95" x 12.01")



Primrose Oak
CL-RKP9003 | SM-RKP9003 | RKP9003 | CP-RKP9003



Richmond Oak
CL-RKP9006 | SM-RKP9006 | RKP9006 | CP-RKP9006



**Class 33 heavy commercial
with a 15 year product guarantee**

K-Guard+® PU coating ensures exceptional performance and longevity even in high traffic environments. The ability to carry out isolated repairs, ensuring ongoing maintenance is low and the product has an extremely strong long term life cycle assessment.



Stanmore Oak RKP9001




Kensington Oak CP-RKP9004



R10 Slip resistance

Slip resistant flooring helps to prevent accidents caused by trips, slips and falls in busy environments.

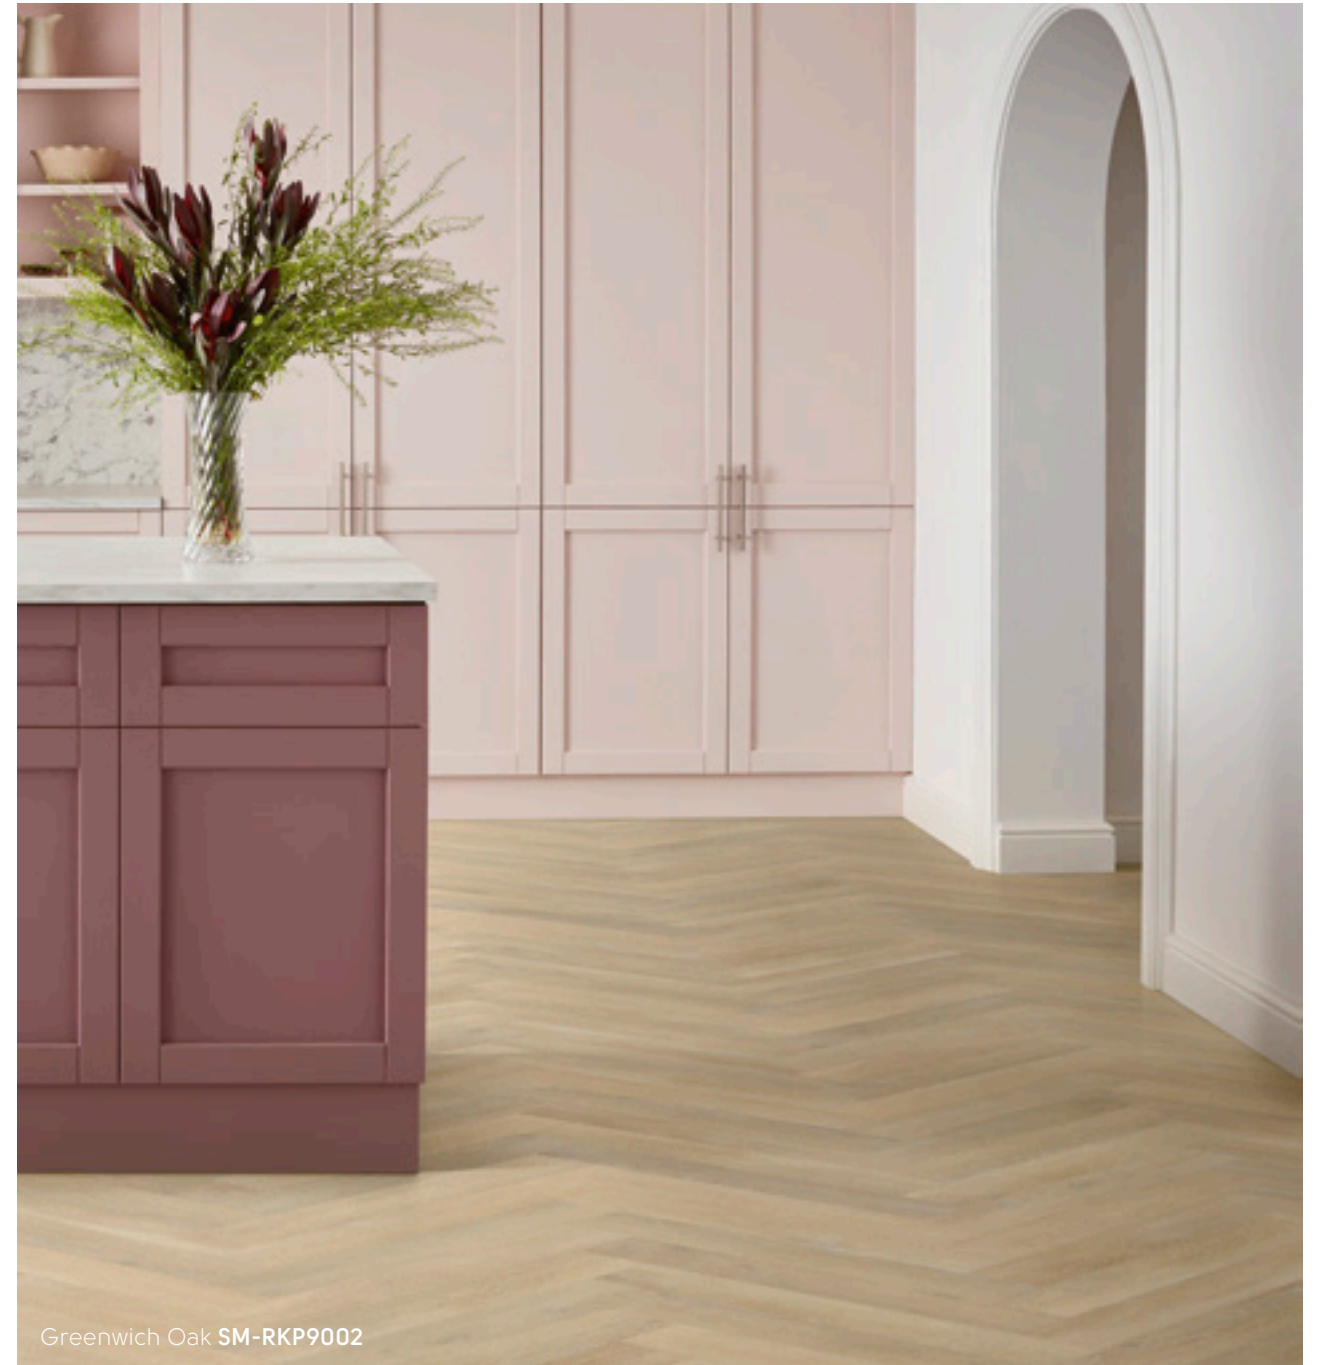

Greenwich Oak SM-RKP9002



Simple installation and site logistics

Rigid core's system requires low skill to install to a showroom standard. Adhesive and preparation-free ensures a short flooring supply chain, making this commodity far easier to manage on site with no sundry items such as additional acoustic underlays, DPMs, smoothing compounds & adhesives.



Hides subfloor imperfections

Utilising our K-Core® technology our rigid core can be installed over most existing hard subfloors. No requirement for sundry preparation such as additional acoustic underlays, DPMs or smoothing compounds.



ENVIRONMENT

Leading the way with change...

We find inspiration in the beauty of the natural world and are committed to producing stylish and durable floors with the lowest possible impact on the environment. With a sustainable construction and people centric approach we are designing products that improve indoor environmental quality. Karndean flooring not only offers the stunning aesthetics of natural materials and the practical benefits of luxury vinyl but also contributes to a green built environment.

- ☑ Our products are 100% phthalate free.
- ☑ We meet the BREEAM assessment rating using the BRE Global Guide to specification, falling into a generic A/A+ rating depending on application and specification.
- ☑ We fall under the M11 section of the SKA rating, helping to reduce the environmental impact on refurbishment projects.

Taking steps to a healthy tomorrow

When specifying flooring we understand that sustainability is a key consideration. In a highly connected world, caring for our community and prosperity means also protecting our planet. Through the development of sustainable products and processes, our flooring is manufactured in factories certified to the ISO 14001 Environmental Standard and ISO 9001 Quality Standard. Our products also contain up to 50% recycled material in the backing layers taken from post-production waste (off-cuts, trimmings and process dust). Almost 100% of this production and post-production waste is then granulated and recycled back into a new plank or tile.

Improving transparency

Our environmental product declarations (EPDs) are product specific type III EPDs with external third-party verification. Both our gluedown and rigid core EPDs feature lifecycle analysis data (LCA) specific to each individual range, and can be used in conjunction with associated LEED and BREEAM projects. It evaluates a product's environmental impact in association with the following potential factors:

- Global warming
- Ozone depletion
- Fossil fuel depletion.

Sustainable raw materials

The PVC in our products is derived from a truly sustainable resource: salt. We also source from ISO 14001/ISO 9001 certified raw material suppliers where possible.


Safe products

All our products are free from:

- Heavy metals and comply with 'REACH' (Registration, Evaluation, Authorisation and Restriction of Chemicals)
- 'BPA' (bisphenol A) and formaldehyde. None of our products are carcinogenic and none contain raw materials which are either reprotoxic or endocrine disrupting.

Air quality

Our products have been tested for contribution to indoor air quality and results demonstrate that our products are very low emitting in terms of VOCs (volatile organic compounds), meeting the strictest standards for air quality.





8mm | 0.55mm

Karndean



[karndeancommercial.com](https://www.karndeancommercial.com)

Karndean Designflooring, Crab Apple Way,
Vale Park, Evesham, Worcestershire, WR11 1GP

 **Karndean**
Designflooring

Karndean Designflooring - Commercial
Call: 01386 820200
Email: commercial@karndean.co.uk
For ROI call: 01 6569887

KD7675UK | COMKREGPRES1